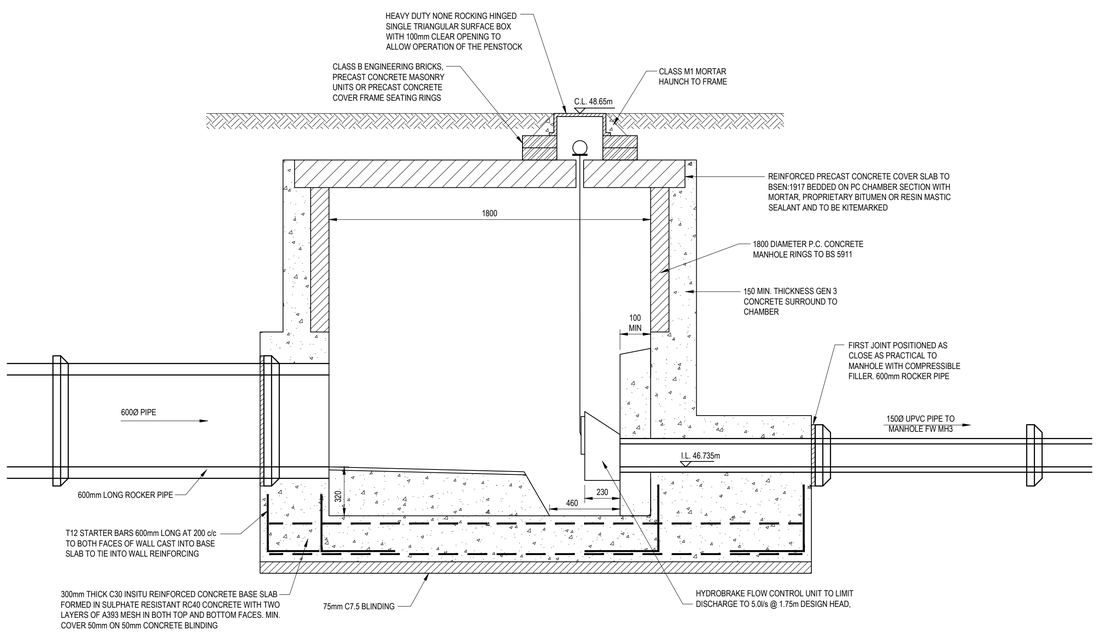

SECTION A-A

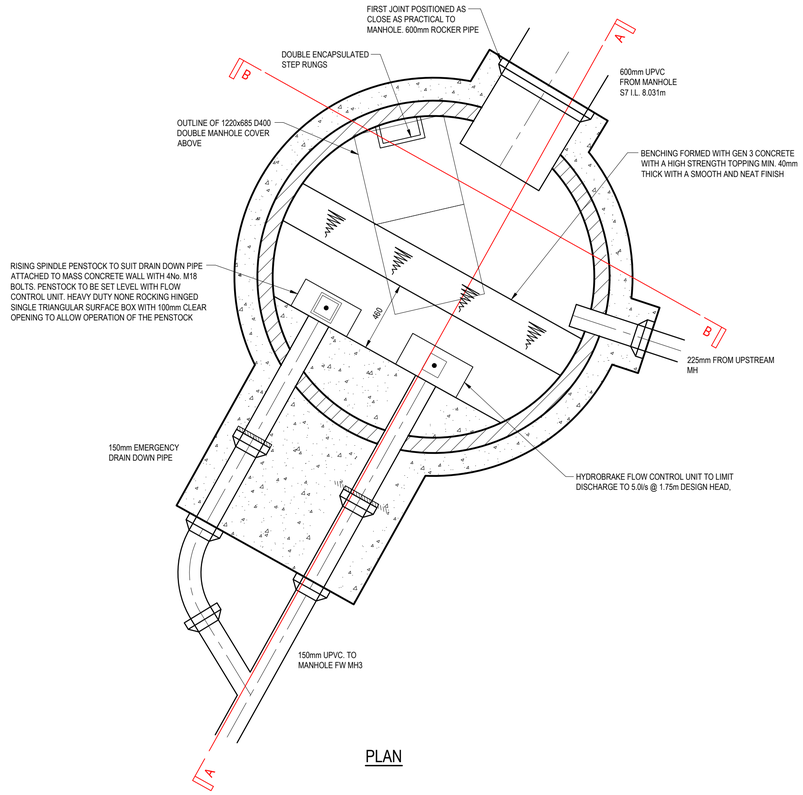

PLAN

ROCKER PIPES	
NOMINAL DIAMETER (mm)	EFFECTIVE LENGTH (m)
150-600	0.600
601-750	1.000
OVER 750	1.250

AS PER 'TABLE E13' IN THE DESIGN AND CONSTRUCTION GUIDANCE

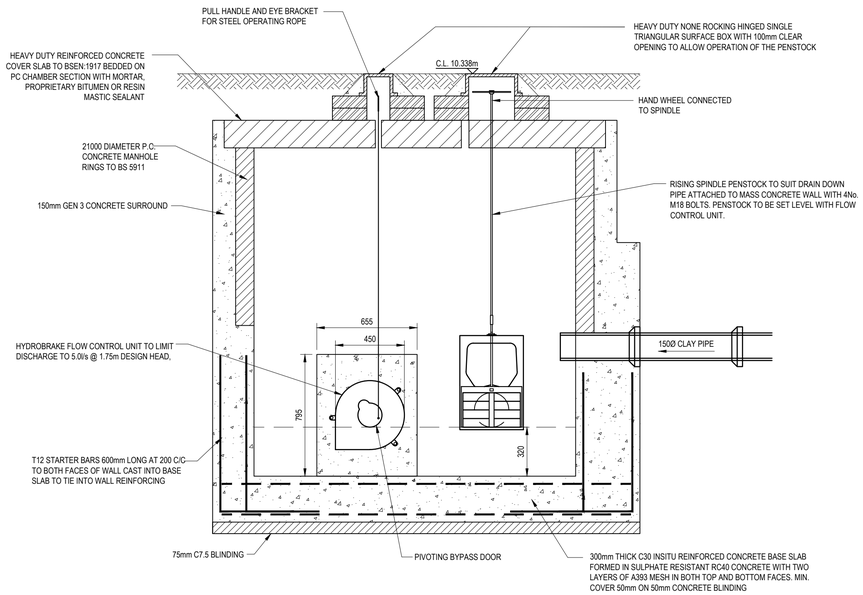

SECTION B-B

ROCKER PIPES TO BE INSTALLED TO ALL MANHOLES AS PER DESIGN AND CONSTRUCTION GUIDANCE REQUIREMENTS, *'SECTION E6.6 - RIGID PIPES AND JOINTS ADJACENT TO STRUCTURES'* AND *'TABLE 'E13'*

REV	DATE	DESCRIPTION	BY	CHK	APP
C01	DEC 2021	Prelim Issue	LS	KOB	KOB

DRAWING STATUS: **CONSTRUCTION**

CLIENT: Brookfinch

ARCHITECT: Calder Peel

PROJECT: Snell Street

TITLE: FLOW CONTROL MH

STATUS:	PROJECT No.	PROJECT	ORIGINATOR	VOL/SYS	LEVEL	TYPE	ROLE	DRAWING No.	REV:
S2	221-062	SNE -	AJP -	ZZ -	00 -	DR -		**C - 0002**	**C01**

SCALE @ A1:	DESIGNED:	DRAWN:	CHECKED:	APPROVED:	DATE:
1:100	KOB	AMG	KOB	KOB	DEC 21

AJP consulting engineers
0151 227 1462 info@ajpltd.co.uk 91 Dale Street, Liverpool, L2 2ET