


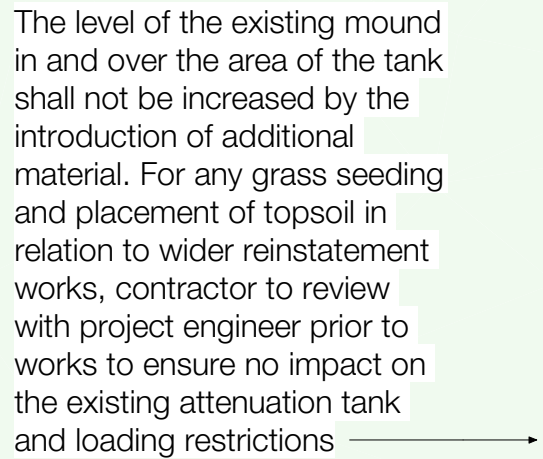

Grass mix 2 - Enriched EL1 flowering lawn mix				
Sowing rate		4 g/m ²		
Total area		89 sqm		
Subsoil depth		100mm		
Code	Species	Common name	%	
M2	Wild flowers			
	Gallium verum	Lady's bedstraw	4.0	
	Leontodon hispidus	Rough hawkbit	0.5	
	Leucanthemum vulgare	Oxeye daisy	1.0	
	Lotus corniculatus	Birdsfoot trefoil	3.7	
	Primula vera	Oxeye	3.0	
	Trifolium pratense	Subclover	4.0	
	Ranunculus acris	Mad dog buttercup	3.5	
	Trifolium pratense	Wild red clover	0.3	
	Grasses			
	Agrostis capillaris	Common bent	8.0	
	Cynosurus cristatus	Crested dogtail	28.0	
Festuca rubra	Straw creeping red fescue	40.0		
	Poa annua	Smaller cat's tail	4.0	
			Total	100%

Shrubs						
Imported topsoil depth		450mm				
Code	Species	Common name	Size	Density	Quantity	
S1	<i>Calamagrostis acutiflora</i> 'Karl Foerster'	Feather reed-grass 'Karl Foerster'	3L	5/m ²	70	
S2	<i>Cornus alba</i> <i>Sibirica</i>	Red barked Dogwood	3L	2/m ²	92	
S3	<i>Cornus stolonifera</i> <i>Flaviramea</i>	Golden Dogwood	3L	2/m ²	34	
S4	<i>Cornus sanguinea</i> 'Midwinter Fire'	Dogwood 'Midwinter Fire'	3L	2/m ²	84	

Works to existing trees & vegetation

To be read in conjunction with tree survey - Roavr environmental arboricultural impact assessment, 21_5837_02_38


Works to existing trees and vegetation should be carried out to BS3998:2010 and are to be undertaken only by an Arboricultural Association approved tree surgeon following the appropriate statutory approvals. All works must comply with the Wildlife and Countryside Act (1981) (as amended) and the Conservation of Habitats and Species Regulations (2010) (as amended), which include the protection

Code	Species	Common name	Proposed works
EG1	-	Hawthorn	Remove
EG2	-	Hawthorn	Remove
EG3	-	Hawthorn	Retain
EG4	-	Common oak	Retain
EG5	-	Silver birch	Retain
EG6	-	Common alder	Retain (single identified tree within group for removal)

DRAWING NOTES

1. Drawing copyright of Stawdo Owen Ltd.
2. All information to be read in conjunction with relevant landscape drawings and specification.
3. Only figured dimensions are to be used.
4. All dimensions in millimetres unless otherwise noted.
5. The Landscape Architect is to be notified of any discrepancies before proceeding.
6. No liability accepted for amendments by others.
7. Utilities: The contractor is to be notified of any underground danger from underground services to be followed by contractor to plant, check, identify, mark services and employ safe excavation/ safe digging practices prior to work commencing.
8. Proposed planting locations to be reviewed following detail design of infrastructure requirements including easements for underground or above ground services, overhead power lines, highway safety and visibility signs and other infrastructure provisions, such as drainage, lighting, signage and other statutory requirements.
9. Signage to be provided by others as specified in the Health and Safety (Safety Signs and Signals) Regulations 1996.
10. Drawing for the purpose of tender and not for construction.
11. For underground services and any diversions/ easements see associated service plans and engineer's drawings.

- | | | | |
|---|--------------------------------|---|--|
| KEY | | | |
|  | Existing grass |  | Proposed grass |
|  | Proposed shrub |  | Proposed wildflower |
|  | Existing tree |  | Proposed root barrier (to specialist design and specification) |
|  | Proposed tree | | |
|  | Existing feature to be removed | | |
|  | Root protection area | | |



P04	100922	AMENDED TREE LOCATION	GLO
P03	001121	PLANNING ISSUE	GLO
P02	020721	OMISSION OF SHRUB PLANTING	GLO
P01	100521	TENDER ISSUE	GLO
REV. NO.	DUMMY	DESCRIPTION OF REVISION	INITIALS

 Stiwdio Owens Landscape Architecture

STATUS

PLANNING

TITLE

SOFT LANDSCAPE DESIGN

DRG. NO		REVISION	
589-STO-00-00-DR-L-0006		P04	
SCALE	DRAWN	APPROVED	DATE
1:150@A1	GLO	GLO	120521