

1. THE CONTRACTOR SHALL ALLOW FOR THE PROTECTION, TEMPORARY AND PERMANENT SUPPORT AND DIVERSION WORKS AS NECESSARY, TO ALL EXISTING SERVICES TO THE SATISFACTION OF THE PUBLIC UTILITIES.
2. THE CONTRACTOR SHALL ALLOW FOR DEALING WITH SURFACE WATER RUN-OFF INTO EXCAVATIONS AND FROM GROUNDWATER BY MEANS OF PUMPS, PUMPING AND DE-WATERING AS APPROPRIATE, IN ORDER TO KEEP THE EXCAVATION AS REASONABLY DRY AS POSSIBLE DURING THE CONSTRUCTION OF THE WORKS.
3. ALL PRIVATE DRAINAGE WITHIN THE SITE IS TO COMPLY WITH THE REQUIREMENTS OF BS EN752 AND BUILDING REGULATIONS PART H. WHERE APPROPRIATE, ALL ADOPTED DRAINAGE SHALL BE DESIGN AND CONSTRUCTED IN ACCORDANCE WITH SEWERS FOR ADOPTION 8th EDITION AND THE ADOPTING AUTHORITIES STANDARD REQUIREMENTS.
4. ALL PRIVATE DRAINAGE PIPES TO BE LAID IN TRENCHES BEDDED CLASS 'B' ON SINGLE SIZED AGGREGATE AND BACKFILLED WITH APPROVED SELECTED FILL (40mm DOWN) REUSED FROM EXCAVATED MATERIAL. UNDER BUILDINGS AND WHERE COVER TO INVERT IS LESS THAN 1200mm UNDER TRAFFICKED AREA PIPES TO BE CAST IN CONCRETE (CLASS 2 BEDDING). CLASS 'S' BED AND SURROUND MAY BE REQUIRED FOR SEWERS TO BE ADOPTED. REFER TO SPECIFIC DRAWINGS FOR FURTHER INFORMATION.
5. SELECTED BACKFILL MATERIAL SHALL CONSIST OF UNIFORM EXCAVATED MATERIAL, FREE FROM STONES LARGER THAN 40mm CLAY LUMPS LARGER THAN 75mm, TREE ROOTS, CONTAMINATED MATERIAL. SELECTED BACKFILL MATERIAL IS TO BE PLACED IN LAYERS NOT EXCEEDING 150mm THICKNESS. THE MATERIAL SHALL BE COMPACTED TO ACHIEVE NOT LESS THAN 95% OF THE MAXIMUM DRY DENSITY AS DETERMINED IN LABORATORY

COMPACTION TESTS. SUFFICIENT TESTING SHALL BE CARRIED OUT, BY THE CONTRACTOR, TO DEMONSTRATE THIS IS ACHIEVED (NUMBER AND FREQUENCY OF TESTING TO BE AGREED WITH RDG), WHERE THE MOISTURE CONTENT OF THE MATERIAL PROHIBITS COMPLIANCE WITH THE ABOVE 6F1 OR SIMILAR IMPORTED MATERIAL SHALL BE USED.

CONCRETE PROTECTION TO PIPEWORK IS TO BE PROVIDED AS FOLLOWS:

- a) ALL PIPEWORK WITHIN PEDESTRIAN/SOFT AREAS WITH LESS THAN 600mm COVER.
- b) ALL PIPEWORK SUBJECT TO VEHICULAR OVERRUN WITH LESS THAN 1.2m COVER.

ALL PIPEWORK WITHIN MANHOLES ARE TO BE LAID SOFFIT TO SOFFIT (U.N.O). ALL CHAMBER INVERT LEVELS ARE FOR THE OUTGOING PIPE LEVELS. BACKDROP PIPEWORK SHALL BE CONNECTED AT SOFFIT TO SOFFIT WITH THE RODDING ACCESS LEVEL SPECIFIED.

ALL DRAINS TO BE LAID ACCORDATELY TO LINE AND LEVEL IN STRICT ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS.

ANY GRADIENTS OF DRAINS INDICATED ARE INDICATIVE ONLY AND THE CONTRACTOR SHALL INSTALL THE DRAINS TO THE SPECIFIED LEVELS SHOWN FOR EACH MANHOLE (U.N.O). CATCHPIP INVERT LEVELS ARE FOR THE OUTGOING PIPE WITH THE SUMP LEVEL SPECIFIED SEPARATELY.

CO-ORDINATE SETTING OUT INFORMATION FOR MANHOLES IS TO THE INTERSECTION THE DRAINS AND NOT THE CENTRE OF THE MANHOLE.

COVER LEVELS OF THE MANHOLES ARE PROVISIONAL AND SUBJECT TO ADJUSTMENT ON SITE TO SUIT THE FINISHED GROUND LEVELS. ALL EXTERNAL WORKS CONSTRUCTION AREAS

MANHOLE COVERS AND FRAMES ARE TO BE IN ACCORDANCE WITH BS5124 AND THE FOLLOWING:

- a) VEHICULAR AREAS: CLASS D400 (E600 IN VULNERABLE SERVICE YARD LOCATIONS), DOUBLE TRIANGULAR, 150mm DEEP DOVULE IRON COVER AND FRAME WITH THREE POINT COVER SEATING, BADGED FW OR SW FOR FOUL OR SURFACE WATER DRAINAGE.
- b) PEDESTRIAN AREAS: CLASS B125, 100mm DEEP, BADGED FW OR SW FOR FOUL OR SURFACE WATER DRAINAGE.

3. POSITIONS AND SIZES OF ABOVE GROUND FOUL AND SURFACE WATER DRAINAGE CONNECTIONS ARE TO BE CONFIRMED PRIOR TO CONSTRUCTION WITH THE ARCHITECT & M&E ENGINEER.

GULLY GRATINGS AND STEEL CHANNEL COVERS ARE TO BE IN ACCORDANCE WITH BS5124 AS FOLLOWS:

- a) AREAS SUBJECT TO VEHICULAR OVERRUN: CLASS D400 MINIMUM.
- b) AREAS NOT SUBJECT TO REGULAR VEHICLE OVERRUN (ADJACENT TO KERBS ETC): CLASS C250.
- c) GULLY GRATES ADJACENT TO KERBS SHALL BE HINGED ON THE SIDE OF THE TRAFFIC DIRECTION (LEFT HAND SIDE).

5. ALL BRICKWORK IN CONNECTION WITH DRAINAGE IS TO BE SOLID CLASS B ENGINEERING BRICK TO BS3921.

6. ALL PRECAST CONCRETE PIPES, CHAMBER PRODUCTS AND ROAD GULLIES SHALL BE TO BS5911 AND BE KITEMARKED.

7. ALL DRAINAGE INSITU CONCRETE SHALL BE GEN3 (U.N.O).

8. ALL INSITU AND CONCRETE PRODUCTS SHALL COMPLY WITH THE REQUIREMENTS FOR SULPHATE EXPOSURE IN ACCORDANCE WITH BRE SPECIAL DIGEST 1, CONCRETE IN AGGRESSIVE GROUND (2001) PART 1: TABLE 2.

19. UPON COMPLETION OF THE WORKS THE CONTRACTOR SHALL CLEAN ALL DRAINAGE BY JETTING, REMOVING ALL DEBRIS FROM SITE. NO DEBRIS SHALL BE PERMITTED TO ENTER THE EXISTING DRAINAGE SYSTEM.
20. CONSTRUCTION JOINTS IN CONCRETE SURROUND MUST NOT BE WITHIN 150MM OF CHAMBER/SHAFT RING JOINTS.
21. ROCKER PIPES TO BE SURROUNDED WITH CONCRETE LOCATED 150mm MINIMUM 200mm MAXIMUM FROM THE FIRST FLEXIBLE JOINT TO THE MANHOLE WALL.
22. SOFT SPOTS IN THE TRENCH FORMATION SHALL BE REMOVED AND REPLACED WITH GRANULAR BEDDING UNLESS INSTRUCTED OTHERWISE.
23. LATERAL CONNECTIONS IN BETWEEN MANHOLE RUNS SHALL BE FORMED BY USING PURPOSE MADE JUNCTION FITTINGS. BEND FITTINGS SHALL BE PROVIDED WHERE APPROPRIATE TO DIRECT THE FLOW INTO MAIN RUNS.
24. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO LIAISE WITH BUILDING CONTROL FOR APPROVALS, INTERIM INSPECTION, SNAGGING AND FINAL INSPECTIONS OF THEIR WORK.
25. THE CONTRACTOR SHALL CONFIRM THE LOCATION OF ALL EXISTING STATUTORY UNDERTAKERS APPARATUS AND SERVICE CONNECTIONS ADJACENT TO AND CROSSING THE WORKS BY TRIAL PITS PRIOR TO COMMENCING MACHINE DIG.
26. AT THE CONCLUSION OF THE WORKS THE CONTRACTOR SHALL PROVIDE A MARKED UP DRAWING TO RECORD ANY AS BUILT VARIATIONS NOT SHOWN ON THE DRAWINGS.
27. THE DRAINAGE SYSTEM IS NOT DESIGNED TO ACCEPT UNTREATED EFFLUENT FROM A COMMERCIAL KITCHEN

CONTAINING GREASE AND OILS. REMOVAL OF GREASE AND OIL SHOULD BE MADE AT SOURCE USING A FLOOR MOUNTED ABOVE GROUND GREASE REMOVAL SYSTEM. IT IS RECOMMENDED THAT A MECHANICAL GREASE REMOVAL SYSTEM BE EMPLOYED FOR THIS PURPOSE NOT A PASSIVE SYSTEM.

8. PIPEWORK TO BE OF THE FOLLOWING MANUFACTURER: 100 / 150 225MM DIAMETER HEPWORTH SUPERSLEEVE VITRIFIED CLAY PIPES (40kN/mm CRUSHING STRENGTH), 300mm + TO BE CONCRETE CLASS M. ALTERNATIVELY POLYESTER UPVC DRAINAGE SYSTEM BY POLYPIPE WHEN INSTALLED IN LINE WITH THE MANUFACTURERS RECOMMENDATIONS. FILTER DRAINAGE TO BE PERFORATED HDPE.


9. ALL RWP. WPC & GULLY CONNECTIONS TO BE 100mm DIA UNO & ARE RWDABLE AT LOCATIONS ABOVE GROUND LEVEL.

10. ALL INSPECTION CHAMBERS WITH A DEPTH GREATER THAN 1.2m TO HAVE A 350mm DIAMETER REDUCING PLATE LOCATED BENEATH COVER AND FRAME TO PREVENT ACCESS.

DISCLAIMER NOTES:

- THIS DOCUMENT IS COPYRIGHT OF THE ORIGINATOR AND MUST BE TREATED AS CONFIDENTIAL
- THIS DOCUMENT MUST NOT BE ALTERED, REPRODUCED OR DISTRIBUTED WITHOUT PRIOR WRITTEN CONSENT OF THE ORIGINATOR
- THIS DOCUMENT IS NOT A CONTRACT. THE ORIGINATOR ACCEPTS NO RESPONSIBILITY FOR ANY DISCREPANCIES ARISING AS A RESULT OF THE ORIGINATOR INFORMATION BEING ALTERED BY OTHERS
- ANY DISCREPANCY MUST BE REPORTED TO THE ORIGINATOR
- DO NOT SCALE THIS DOCUMENT - USE FIGURED DIMENSIONS ONLY
- ALL DIMENSIONS MUST BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF ANY RELATED WORKS
- THIS DOCUMENT MUST BE READ IN CONJUNCTION WITH ALL SUPPORTING DOCUMENTS PRODUCED BY THE ORIGINATOR AND OTHER PROJECT DISCIPLINES
- THE ORIGINATOR ACCEPTS NO RESPONSIBILITY FOR THE ACCURACY OF BACKGROUND INFORMATION PRODUCED BY THIRD PARTIES - THIS MUST BE TREATED AS INDICATIVE ONLY
- USERS OF THIS DOCUMENT ARE RESPONSIBLE FOR CHECKING WHICH REVISION IS CURRENT
- THE DOCUMENT STATUS "INFORMATION" OR "PRELIMINARY" INDICATES THAT THIS DRAWING IS FOR REFERENCE PURPOSES ONLY - THE ORIGINATOR WILL ACCEPT NO RESPONSIBILITY FOR THE COMPLETENESS OF INFORMATION UNDER THIS STATUS
- THE DOCUMENT STATUS "RECORD" OR "AS BUILT" HAS BEEN PREPARED IN PART, BASED UPON INFORMATION PROVIDED BY OTHER DISCIPLINES. THIS INFORMATION IS BELIEVED TO BE RELIABLE. THE ORIGINATOR ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF THIS RECORD OR "AS BUILT" DOCUMENT OR FOR ANY ERRORS OR OMISSIONS THAT MAY HAVE BEEN INCORPORATED INTO IT AS A RESULT OF INCORRECT INFORMATION PROVIDED TO THE ORIGINATOR. THOSE RELYING ON THE RECORD OR "AS BUILT" DOCUMENT ARE ADVISED TO OBTAIN INDEPENDENT VERIFICATION OF ITS ACCURACY

CDM REGULATIONS 2015
SIGNIFICANT OR NON-OBVIOUS RISKS AND RISKS WHICH ARE DIFFICULT TO MANAGE ARE IDENTIFIED ON THIS DRAWING USING THE FOLLOWING SYMBOL IDENTIFIED TO THE RIGHT WITH BRIEF ACCOMPANYING TEXT. FOR FURTHER DETAILS OF THE RISKS IDENTIFIED BY DESIGNERS, REFERENCE SHOULD BE MADE TO CDM HAZARD REGISTER.

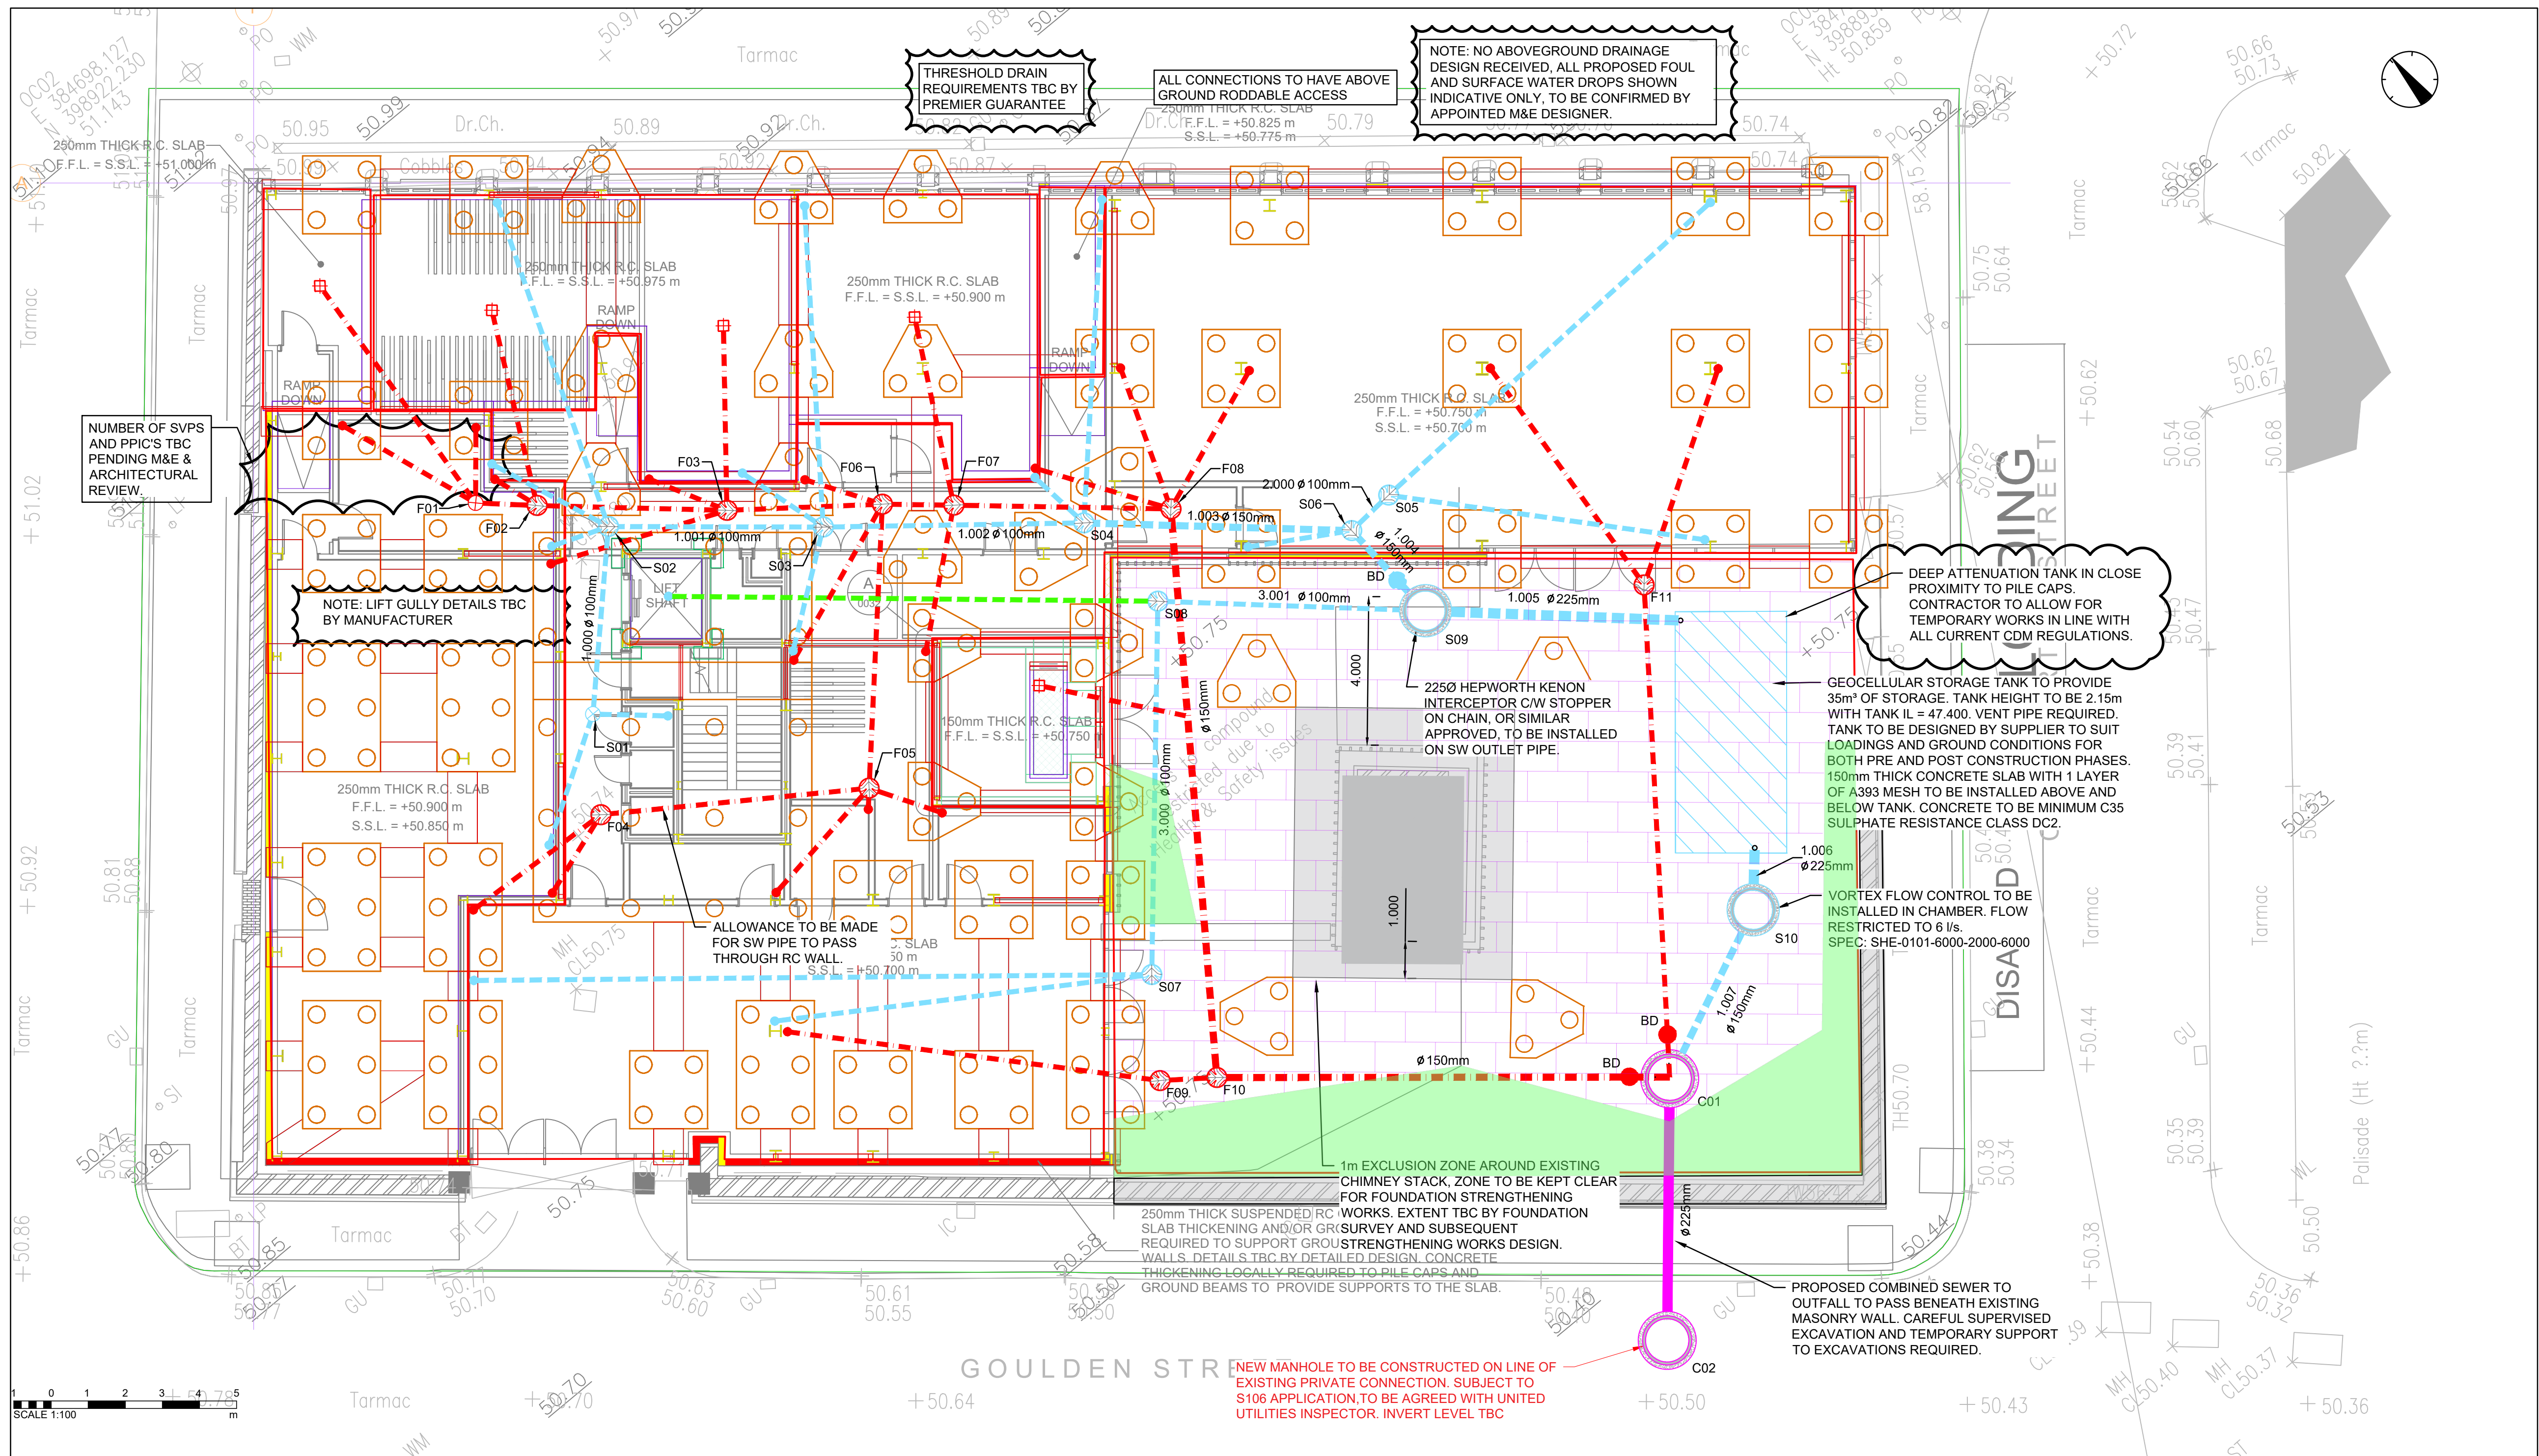

 EXISTING CW DRAIN
 EXISTING CW MANHOLE
 PROPOSED CW DRAIN
 PROPOSED CW MANHOLE
 PROPOSED FW DRAIN
 PROPOSED FW MANHOLE
 PROPOSED SW DRAIN
 PROPOSED SW MANHOLE
 PROPOSED PERMEABLE PAVING
 PROPOSED RAIN GARDEN
 SITE BOUNDARY

P03	UPDATED TO SUIT COMMENTS	28.01.22	AS	ED
P02	PRELIMINARY ISSUE	03.11.21	AS	ED
P01	PRELIMINARY ISSUE	09.07.21	AS	ED
REV	DESCRIPTION	DATE	BY	CHKD

ORIGINATOR:

RIDGE

5TH FLOOR
BELVEDERE HOUSE
12 BOOTH STREET
MANCHESTER, M2 4AW

TEL: 0161 833 9579

WWW.RIDGE.CO.UK

CLIENT:
MULBURY CITY

IN ASSOCIATION WITH:

PROJECT:
GOULDEN STREET

TITLE: DRAINAGE GA

ENG/TECH:	CSE:	ICSE:	SCALE: 1:100 @ A1
AS	ED	ED	STATUS ISSUE: 09.07.21

STATUS:	PRELIMINARY
---------	-------------

UNLESS ISSUED FOR CONSTRUCTION - WORKS AT CLIENT/CONTRACTORS RISK							
SUITABILITY:		S0 - Initial Status or WIP					
PROJECT:	ORG:	ZONE:	LEVEL:	TYPE:	ROLE:	NUMBER:	REV:
5015327	BDG	XX	XX	DB	C	0101	P03