


All laps must be fully sealed.

Detail Issued For Guidance Only,
Designer's Approval Required

Site construction sequencing should be assessed before the appropriate Visqueen Standard Detail is selected & approved by the Designer

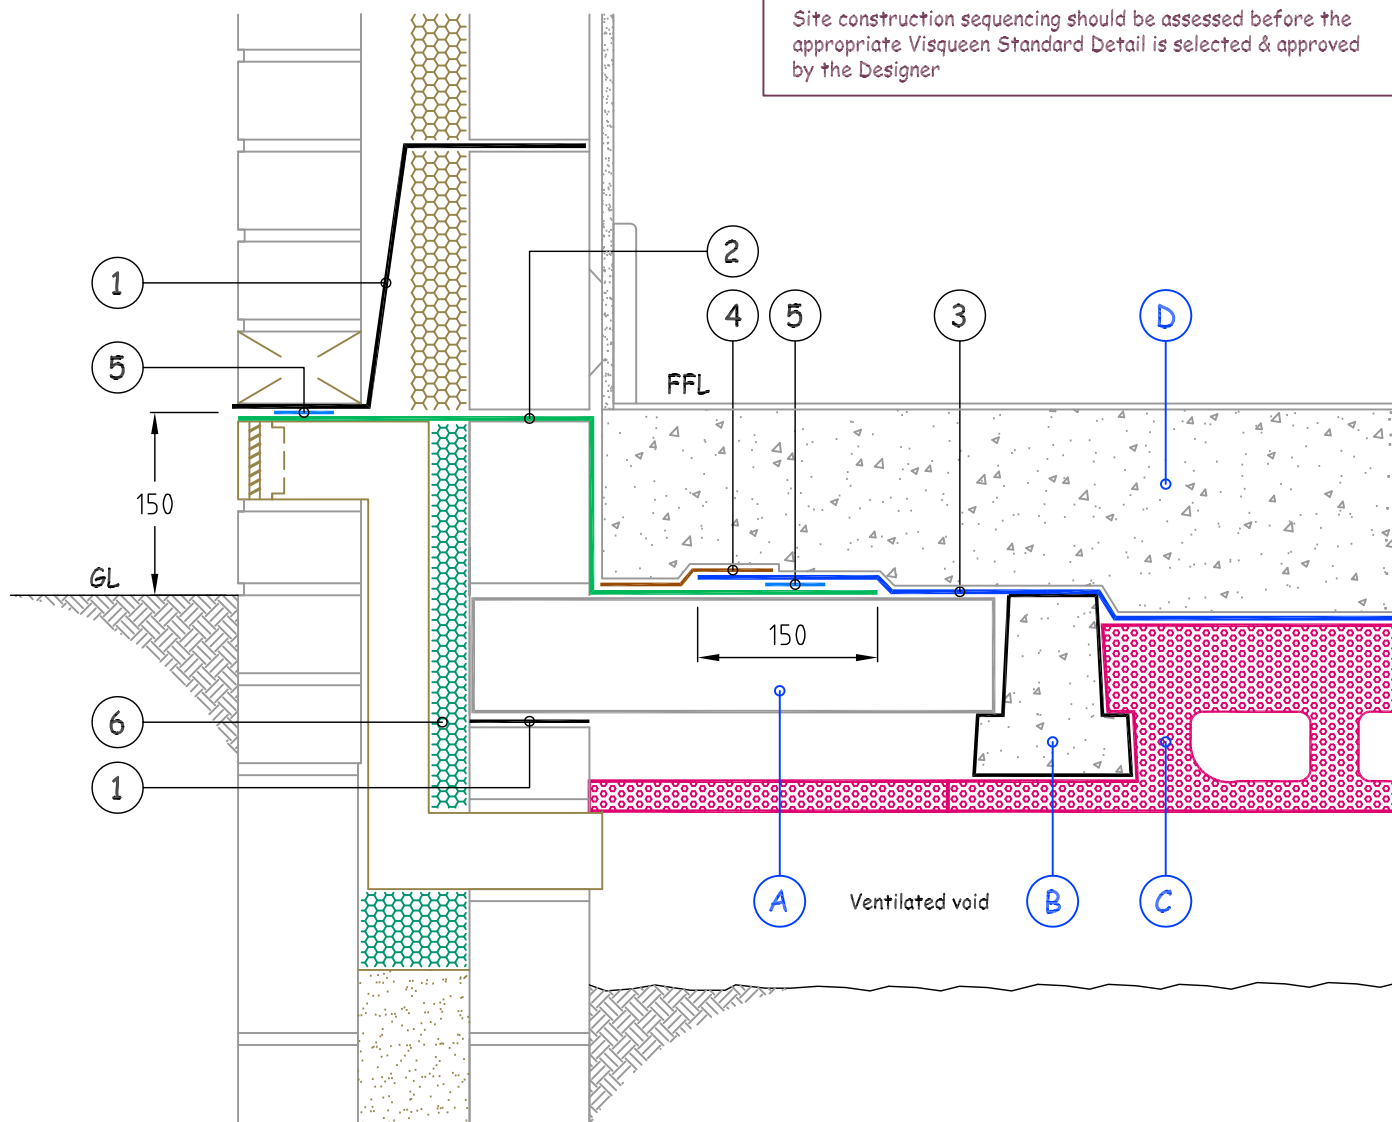

KEY TO MATERIALS :-

(Refer to Visqueen Technical Data for full detailed material specification).

- 1) VISQUEEN ZEDEX CPT DPC.
- 2) VISQUEEN GR DPC.
- 3) VISQUEEN GAS BARRIER.
- 4) VISQUEEN GR LAP TAPE.
- 5) VISQUEENPRO DOUBLE SIDED JOINTING TAPE (50mmx10m).
- 6) RIGID POLYSTYRENE INSULATION.

KEY TO HANSON JETFLOOR SYSTEM :-

- A) THERMAL EDGE BLOCK.
- B) HANSON PRESTRESSED BEAM.
- C) HANSON JETFLOOR POLYSTYRENE (EPS) INFILL BLOCK.
- D) STRUCTURAL CONCRETE TOPPING WITH POWERFLOAT FINISH.

NB : All queries relating to the Jetfloor System MUST be referred to Hanson Building Products, Floors & Precast Division : 0870 6097094.

NB: DO NOT SCALE - USE FIGURED DIMENSIONS ONLY.



Visqueen Building Products

Contact Technical Support :

t : 0870 6092084

f : 0870 8508169

e : enquiries@visqueenbuilding.co.uk

www.visqueenbuilding.co.uk

Project: Standard Detail : Hanson Building Products - Jetfloor System (150mm beam shown).

Drg No.- JF-GB-01.

Date.- 11/11.

Scale.- NTS.

© COPYRIGHT
RESERVED.