This drawing is provided to customers free of charge and the details shown are subject to the accuracy of the information provided to British Gypsum at the time the drawing was originally requested. No duty of care is owed to the recipient or any other third party and British Gypsum cannot accept liability in respect of the details shown. The drawing should therefore be approved by the project design and management authority before use to ensure that it meets with their specific project requirements. It should also be read in conjunction with British Gypsum's current literature available at www.british-gypsum.com. Taping and finishing in accordance with British Gypsum's current recommendations is assumed (with the exception of FireCase system). Please note the drawing may show British Gypsum products fixed by or to products that are non-British Gypsum products/fixings please refer to Specifying Authority for specification details.

CasoLine MF

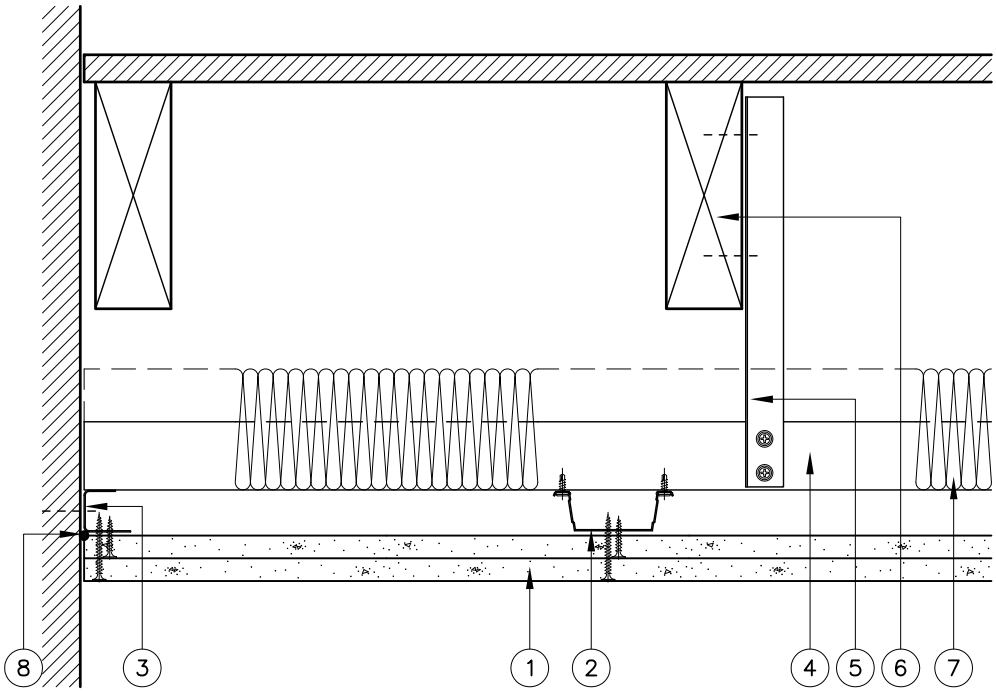

1 2 layers Gyproc soundbloc plasterboard fixed with British Gypsum Drywall Screws at 230mm centres in field of board & 150mm centres at board ends

2 Gypframe MF5 Ceiling Sections at max. 450mm centres fixed to each MF7 with 2 no. British Gypsum Wafer Head Jack-Point Screws or MF9 Connecting Clip

3 Gypframe MF6 Perimeter Channel suitably fixed to wall at 600mm centres

4 Gypframe MF7 Primary Support Channels at 1200mm centres

5 Gypframe FEA1 Steel Angle hangers at 1200mm centres fixed to MF7 with 2 no. British Gypsum Wafer Head Jack-Point Screws & fixed to joists with 2 no. British Gypsum Drywall Timber Screws

6 Timber joist floor with wood board flooring

7 Isover insulation where required

8 Gyproc Sealant for optimum sound insulation

Perimeter 1

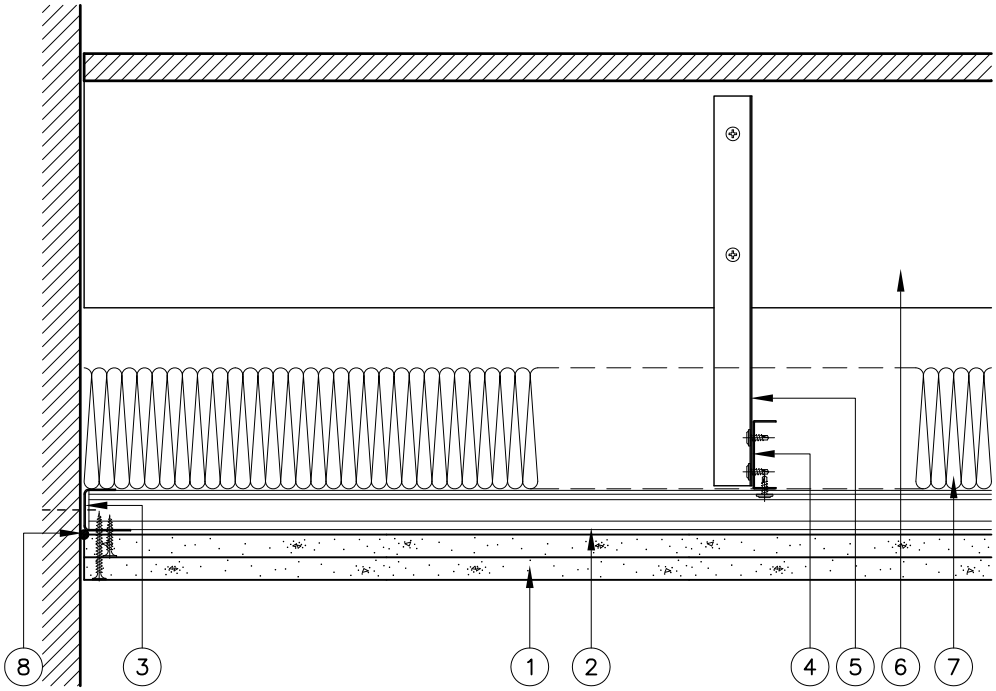

Perimeter 2

British Gypsum SAINT-GOBAIN

Technical Advice Centre
Tel: 0844 800 1991
E-mail: bgtechnical.enquiries@bpb.com

Title:

CasoLine MF

Concealed Grid MF Suspended Ceiling

TYPICAL DETAILS READ WITH PROJECT SPECIFICATION

Scale:	Date:	Drawn:	Dwg No.:	Rev.:
1:5	Jan 13	MRC	TY-301-HAL2-02	