


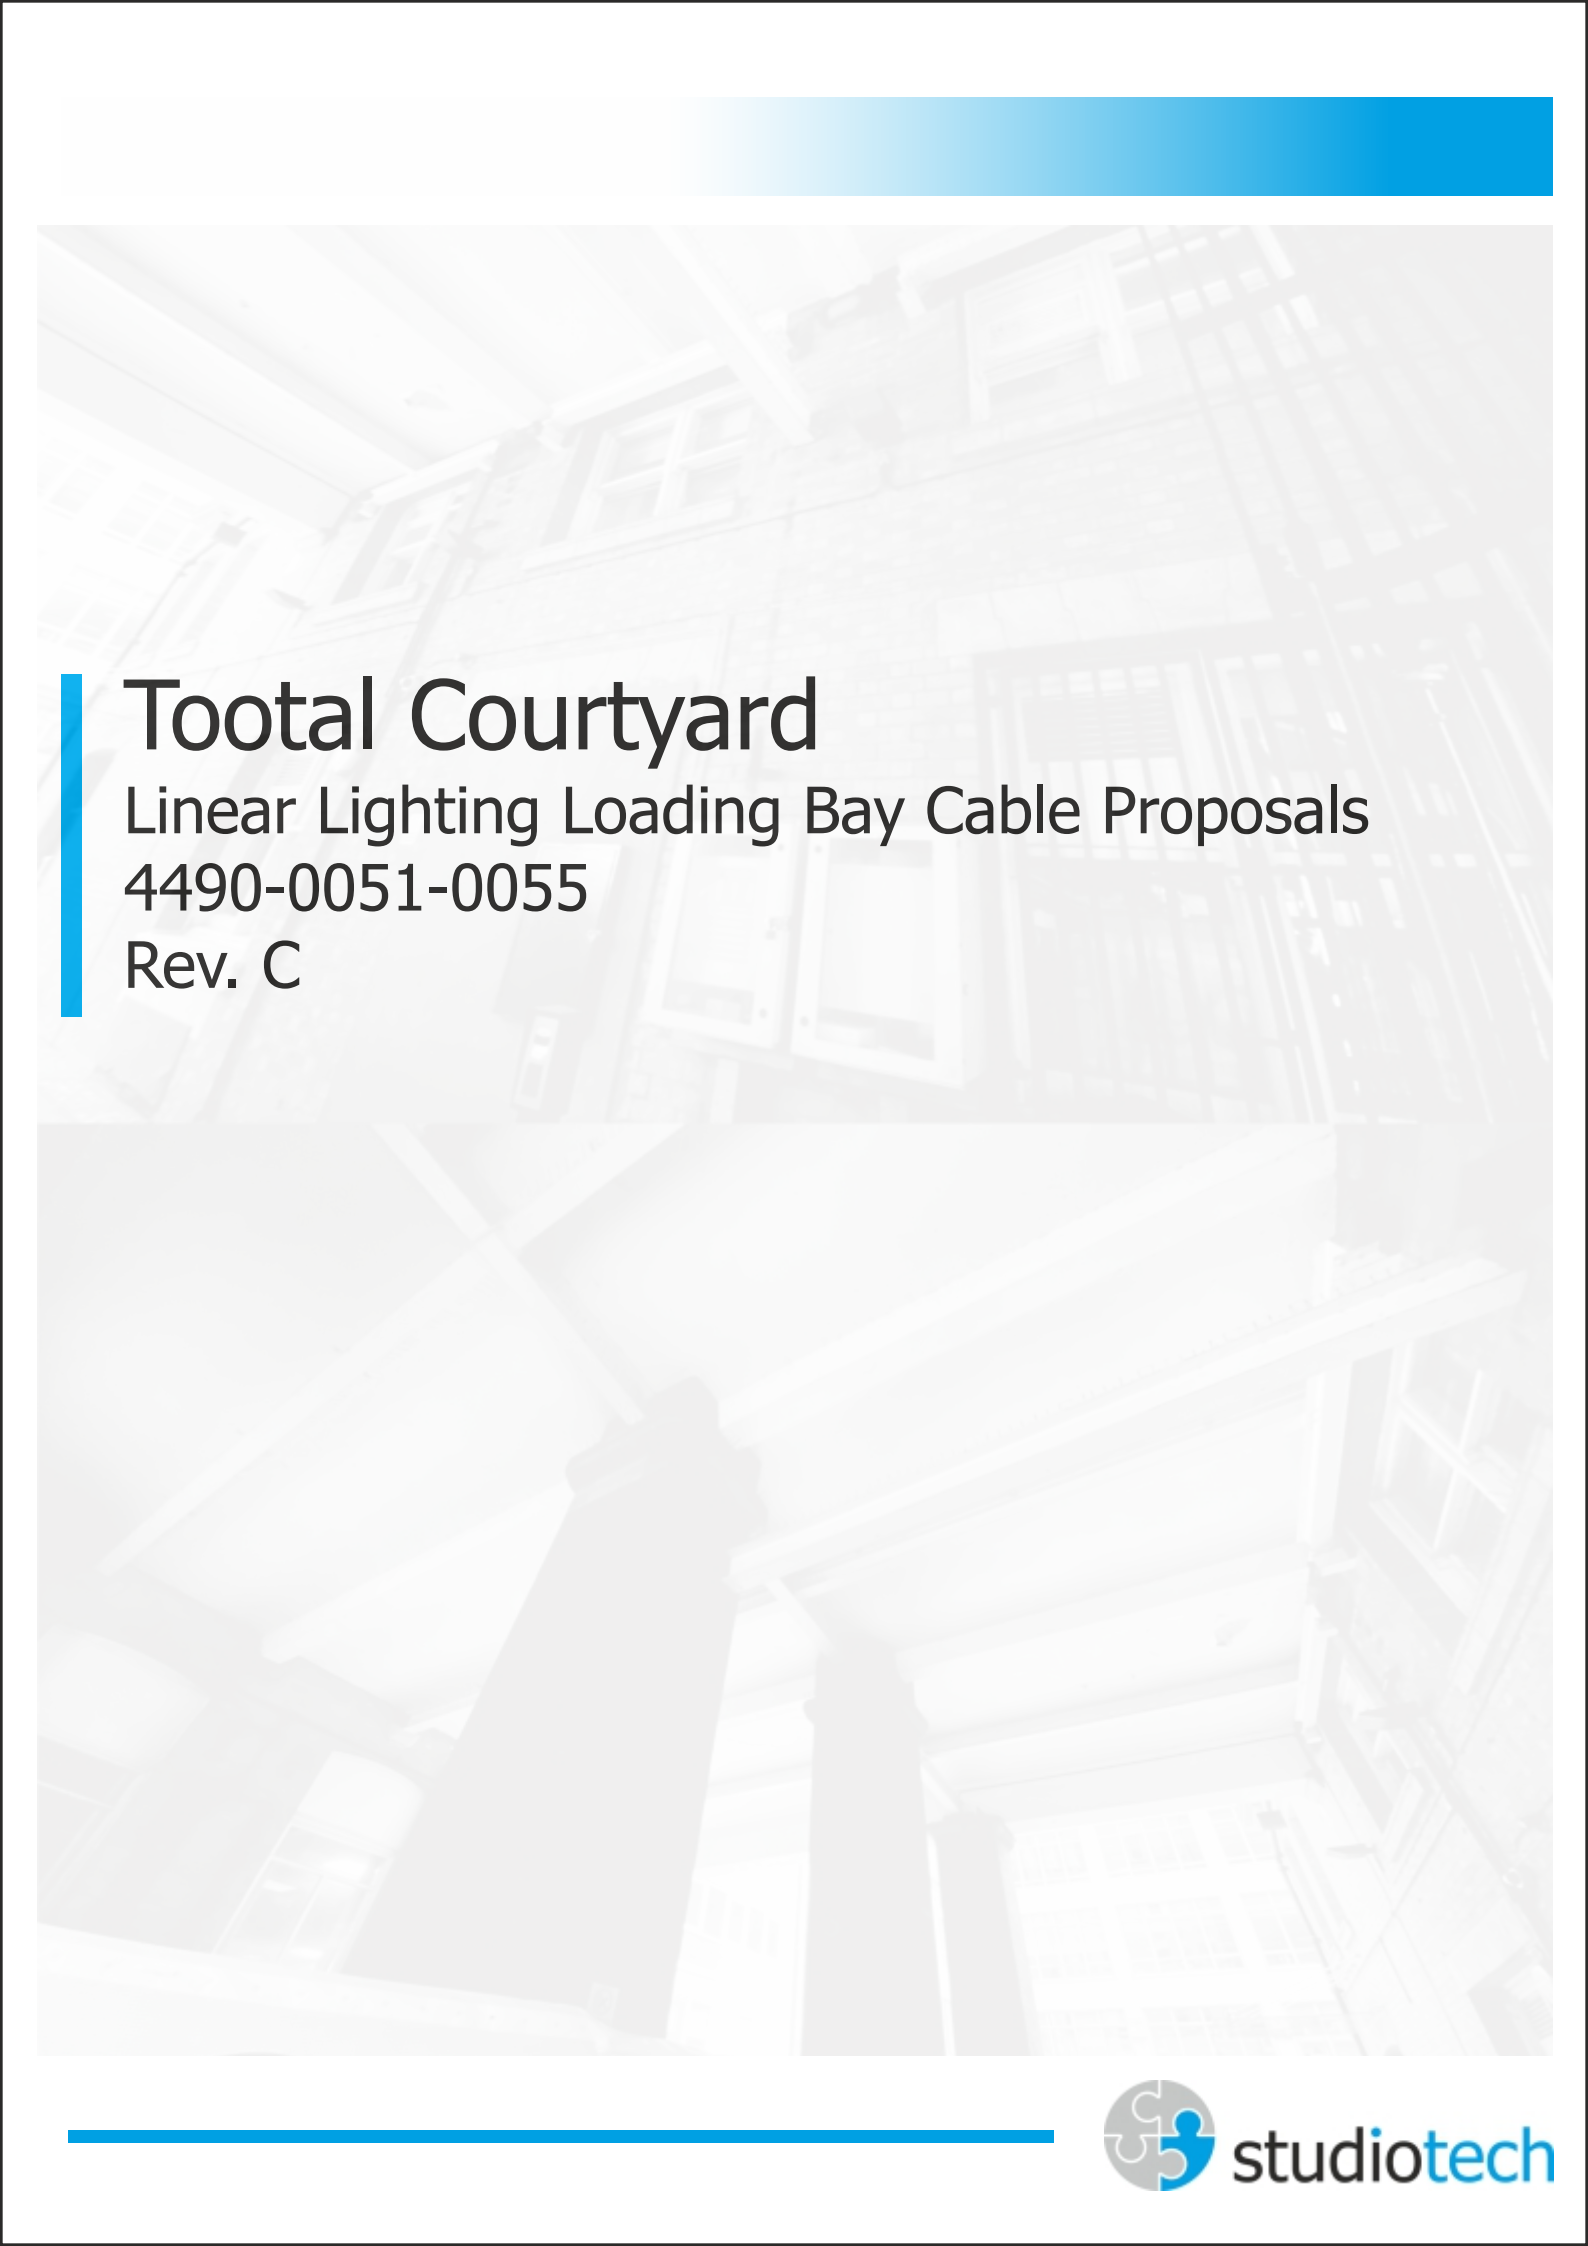

Tootal Courtyard

Linear Lighting Loading Bay Cable Proposals

4490-0051-0055

Rev. C

Contents

Loading Bay Gate Hinge Lighting.....	2-4
Loading Bay Column Lighting.....	5
Underpass Entrance Lighting.....	6
Loading Bay Gate Hinge Concept Visuals.....	7-8

Loading Bay Gate Hinge Lighting

Box trunking running horizontally across 'I' beams to be sprayed white by TMT to match.

Where practically possible all fixings will be put into mortar joints and not into brickwork, if the mortar is not suitable for fixings we may be required to fix into the brickwork to ensure a safe fixing. We estimate no more than 50 fixings will be used into mortar or brick"

Cable containment run at high level will be fixed as discretely as possible onto the top edge of the steel 'I' beams

New supply cables to be routed from the basement & contained within 50mm x 50mm galvanized steel box trunking. All containment to be galvanized. All trunking to be sprayed by TMT in either white or black dependent on surround area finish, i.e wall = black, ceiling = white

Cable containment to be run vertically down wall, to have no more than x6no. fixings (subject to suitability of mortar fixings) Fixings will be into mortar joints and not granite block. Should mortar not be suitable for fixings, alternative methods will be discussed

Cables running to the to the gate hinge light fittings will be run in 20mm black conduit directly above the hinge. Where the conduit meets the fittings, 20mm flexible metal conduit will be used to help disguise the cable containment within the bracket detail




New supply cables to be routed from the basement & contained within 50mm x 50mm galvanized steel box trunking. All containment to be galvanized. All trunking to be sprayed by TMT in either white or black dependent on surround area finish, i.e wall = black, ceiling = white

Cable containment to be secured to the wall using conduit saddles fixed into mortar joints and not granite

Existing fire alarm cables will remain in current location

Existing security fitting and fused spur will remain in place

Loading Bay Gate Hinge Lighting

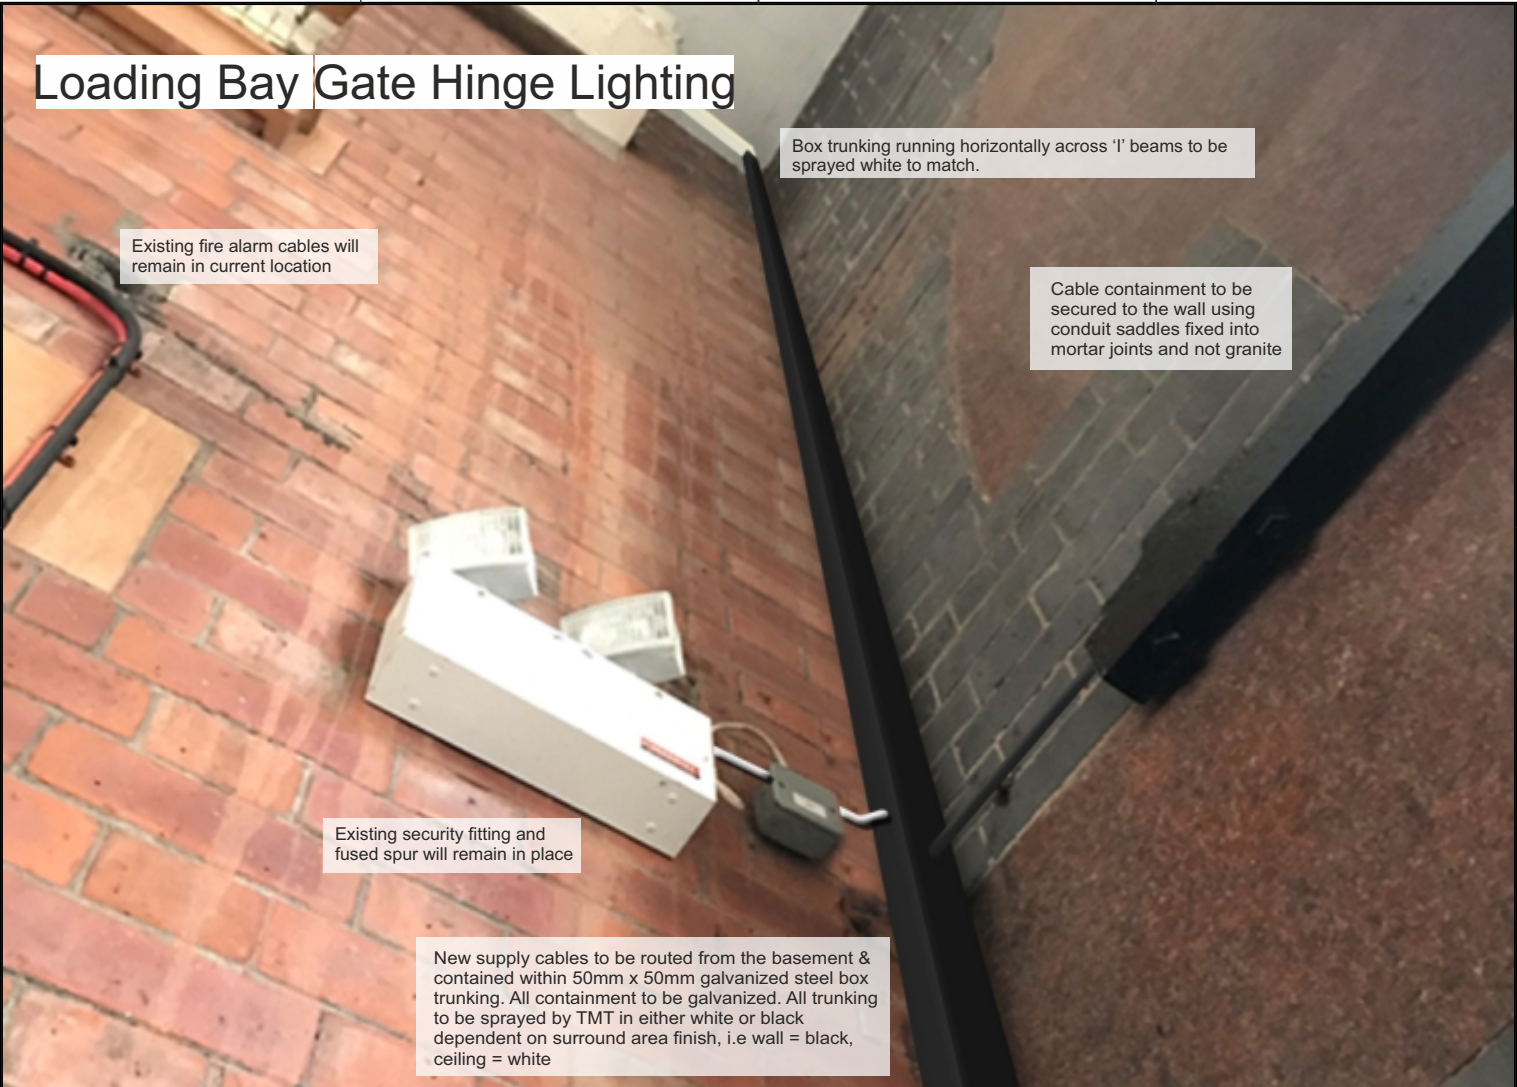


Existing fire alarm cables will remain in current location

Box trunking running horizontally across 'I' beams to be sprayed white to match.

Cable containment to be secured to the wall using conduit saddles fixed into mortar joints and not granite

Existing security fitting and fused spur will remain in place

New supply cables to be routed from the basement & contained within 50mm x 50mm galvanized steel box trunking. All containment to be galvanized. All trunking to be sprayed by TMT in either white or black dependent on surround area finish, i.e wall = black, ceiling = white

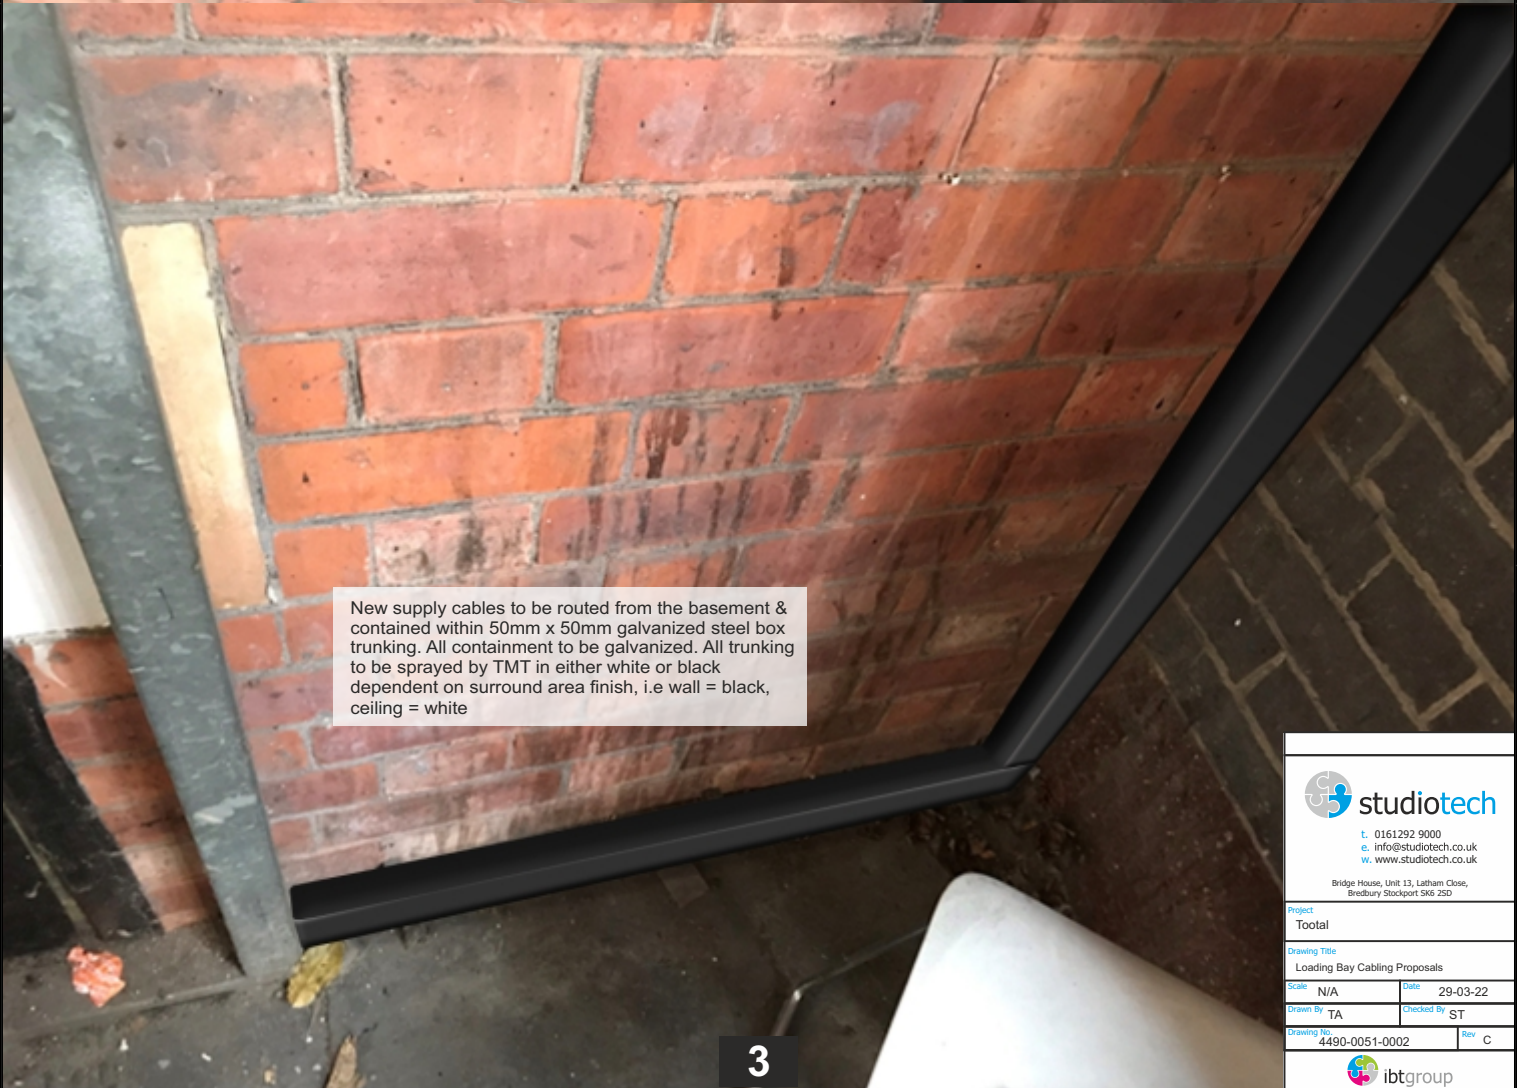

New supply cables to be routed from the basement & contained within 50mm x 50mm galvanized steel box trunking. All containment to be galvanized. All trunking to be sprayed by TMT in either white or black dependent on surround area finish, i.e wall = black, ceiling = white



studiottech
t. 0161292 9000
e. info@studiottech.co.uk
w. www.studiottech.co.uk
Bridge House, Unit 13, Latham Close,
Bredbury Stockport SK6 2SD

Project Tootal	
Drawing Title Loading Bay Cabling Proposals	
Scale N/A	Date 29-03-22
Drawn By TA	Checked By ST
Drawing No. 4490-0051-0002	Rev C

 **ibtgroup**

Loading Bay Gate Hinge Lighting

20mm conduit to run down brick wall into 'T' box to split into two directions. Conduit to run on top of gate hinge, blending in with the hinge itself. Conduit sits at a height above approx. 3m, therefore will not visually impact when viewed from below.

As can be seen from the image, the conduit is difficult to pick out due it being mounted over 3m, and above head height. For visual reference, the vehicle parked to the right of the image is approx. 1900mm high.



t. 0161292 9000
e. info@studiottech.co.uk
w. www.studiottech.co.uk

Bridge House, Unit 13, Latham Close,
Bredbury Stockport SK6 2SD

Project

Tootal

Drawing Title

Loading Bay Cabling Proposals

Scale

N/A

Date

29-03-22

Drawn By

TA

Checked By

ST

Drawing No.

4490-0051-0003

Rev

C



Loading Bay Column Lighting

20mm conduit to run from box trunking to fittings via inside of 'I' beams mounted perpendicular to wall. Conduit concealed by 'I' beam returns

New supply cables to be routed from the basement & contained within 50mm x 50mm galvanized steel box trunking. All containment to be galvanized. All trunking to be sprayed by TMT in either white or black dependent on surround area finish, i.e wall = black, ceiling = white

Box trunking running horizontally across 'I' beams to be sprayed white by TMT to match

Existing fire alarm panels and all red cables will remain in current locations

Where practically possible all fixings will be put into mortar joints and not into brickwork, if the mortar is not suitable for fixings we may be required to fix into the brickwork to ensure a safe fixing. We estimate no more than 50 fixings will be used into mortar or brick"

20mm conduit to run from top of column down to the Iguzzini Trick fitting, fixed using conduit saddles into the mortar joints

Box trunking running horizontally across 'I' beams to be sprayed white by TMT to match

Existing CCTV and conduit to remain in current locations



t. 0161292 9000
e. info@studiotech.co.uk
w. www.studiotech.co.uk

Bridge House, Unit 13, Latham Close,
Bredbury Stockport SK6 2SD

Project
Tootal

Drawing Title

Loading Bay Cabling Proposals

Scale N/A

Date 29-03-22

Drawn By TA

Checked By ST

Drawing No. 4490-0051-0004

Rev C



Underpass Entrance Lighting (Option 1 Linear Lighting)

RGBW narrow beam linear fittings to graze underpass

Linear light fittings to be fixed to Uni-strut rail.
Assembly to be mounted to I-beams through the use of fabricated clamping brackets.
Glare shield added to ensure minimal lightspill to surrounding areas



t. 0161292 9000
e. info@studiotech.co.uk
w. www.studiotech.co.uk

Bridge House, Unit 13, Latham Close,
Bredbury Stockport SK6 2SD

Project
Tootal

Drawing Title

Underpass Entrance Lighting Proposals

Scale

N/A

Date

29-03-22

Drawn By

TA

Checked By

ST

Drawing No.

4490-0051-0005

Rev

C



Loading Bay Gate Hinge Concept Visuals





studiottech

t. 0161292 9000

e. info@studiottech.co.uk


w. www.studiottech.co.uk

Bridge House, Unit 13, Latham Close,
Bredbury Stockport SK6 2SD


Project	
Tootal	
Drawing Title	
Loading Bay Gate Hinge Concept Visuals	
Scale	N/A
Date	29-03-22
Drawn By	TA
Checked By	ST
Drawing No.	4490-0054
Rev	C

ibtgroup

Loading Bay Gate Hinge Concept Visuals

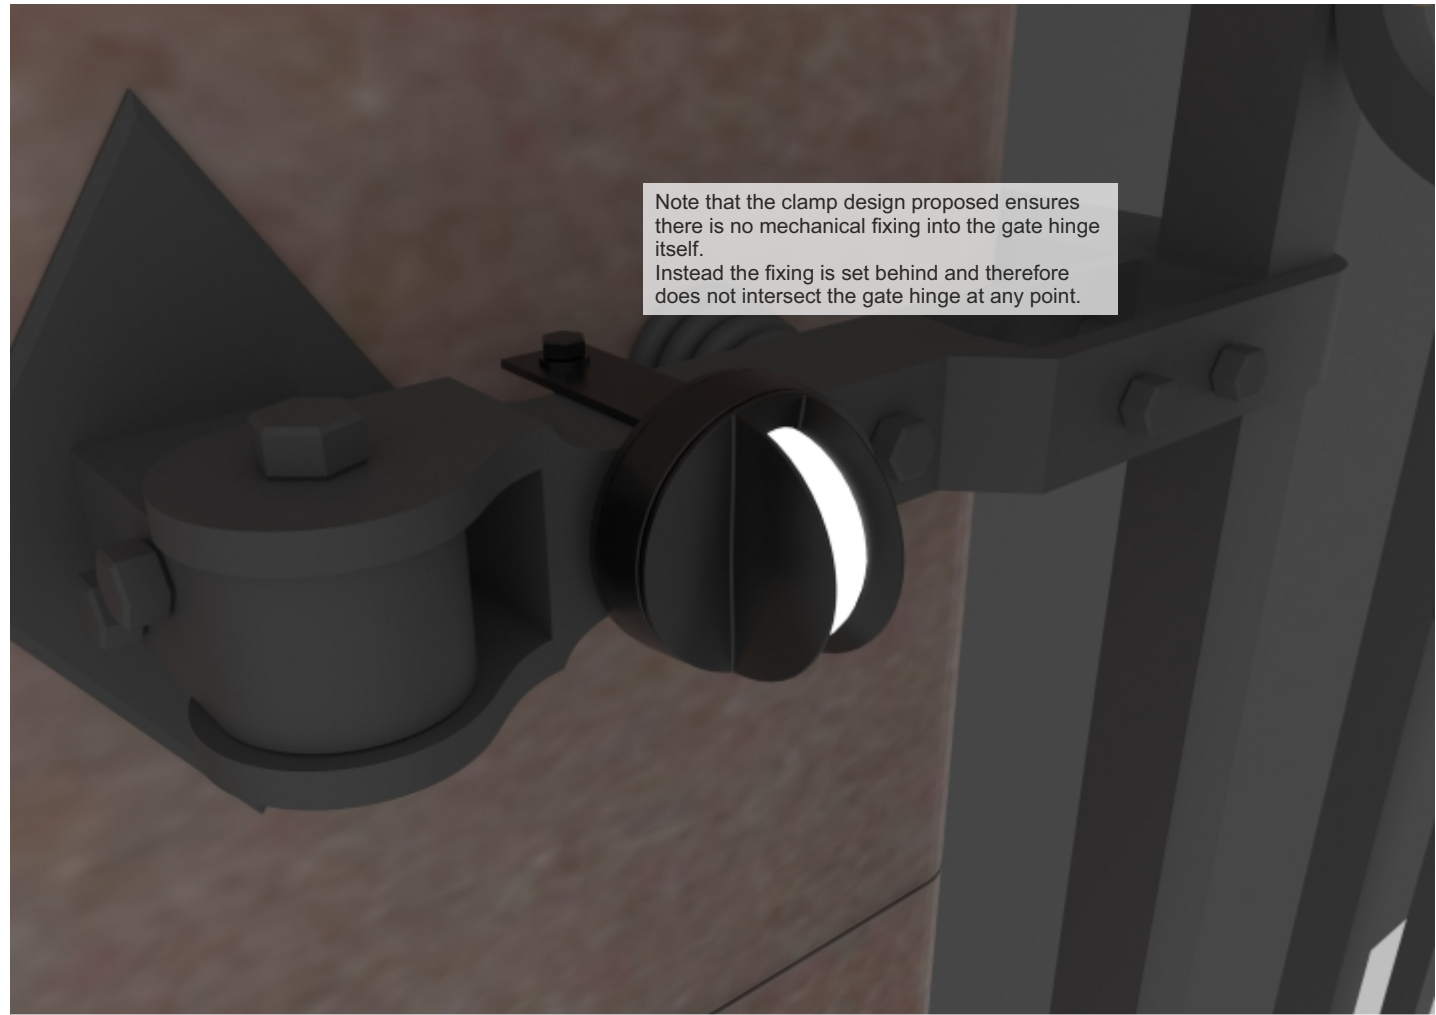

Note that the clamp design proposed ensures there is no mechanical fixing into the gate hinge itself. Instead the fixing is set behind and therefore does not intersect the gate hinge at any point.

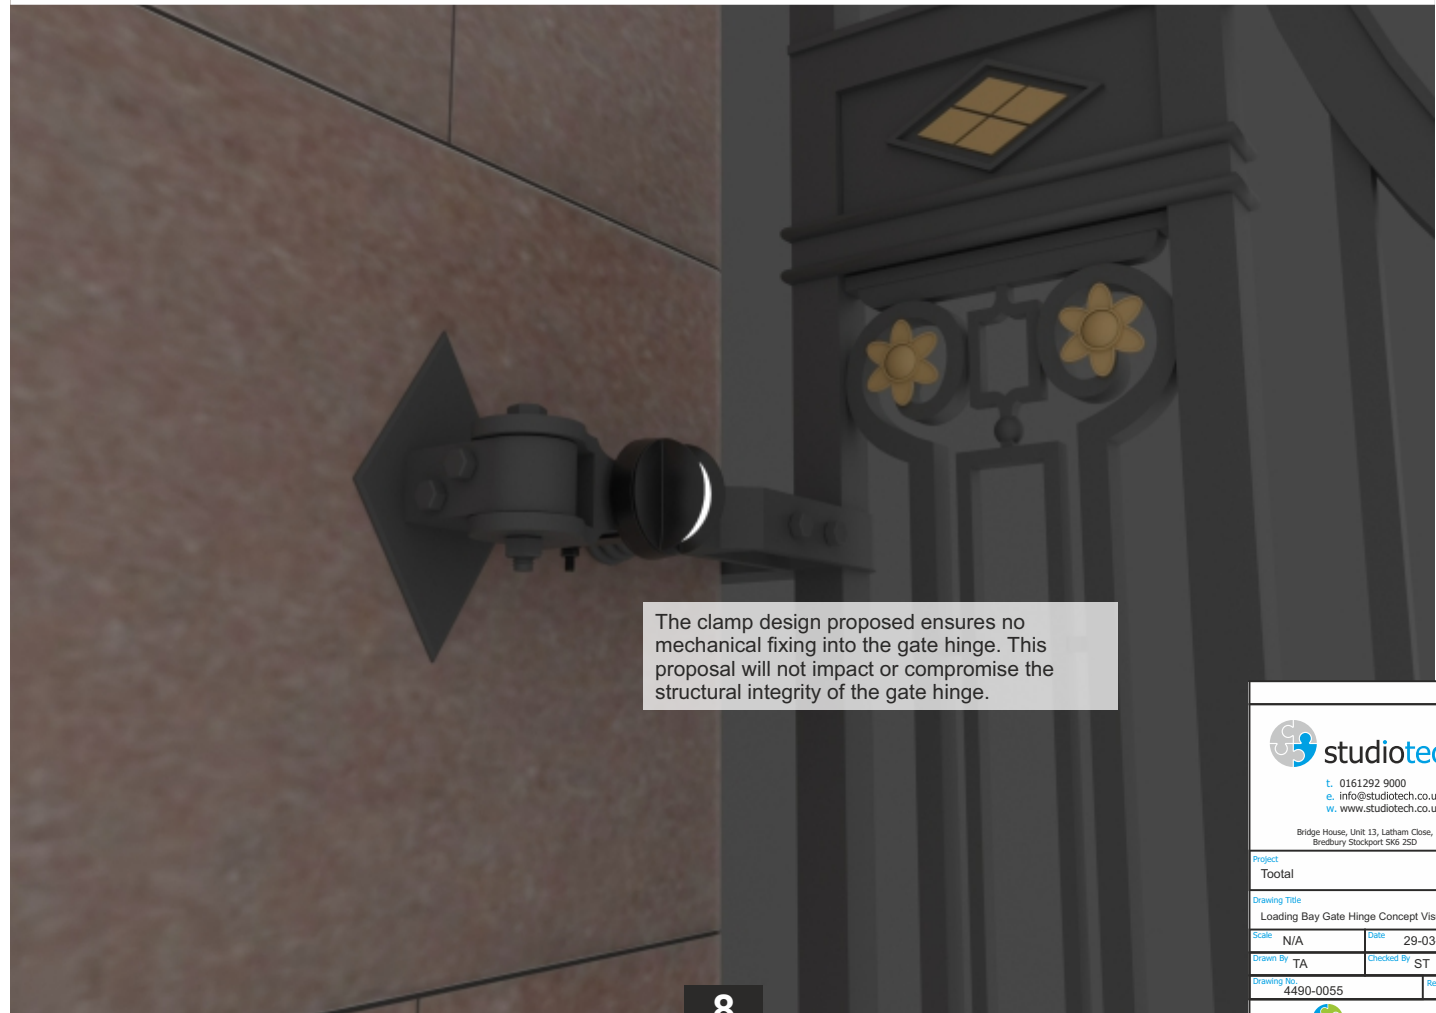

The clamp design proposed ensures no mechanical fixing into the gate hinge. This proposal will not impact or compromise the structural integrity of the gate hinge.



studiottech
t: 0161292 9000
e: info@studiottech.co.uk
w: www.studiottech.co.uk
Bridge House, Unit 13, Latham Close,
Bredbury Stockport SK6 2SD

Project Tootal			
Drawing Title Loading Bay Gate Hinge Concept Visuals			
Scale N/A	Date 29-03-22		
Drawn By TA	Checked By ST		
Drawing No 4490-0055	Rev C		

**ibtgroup**

Studiotech UK LTD
Bridge House, Unit 13,
Latham Close,
Bredbury, Stockport,
SK6 2SD

0161 292 9000
0161 292 9009
info@studiotech.co.uk

An IBT Group Partner



Please note: Although every effort has been made to ensure this document is representative in terms of lighting effects shown, all concept visual & supporting information supplied is purely indicative and for illustrative purposes only.

StudioTech (UK) Ltd © 2022

