



5.0. General Arrangement Drawings.

5.1. Vertical Sections (UH).

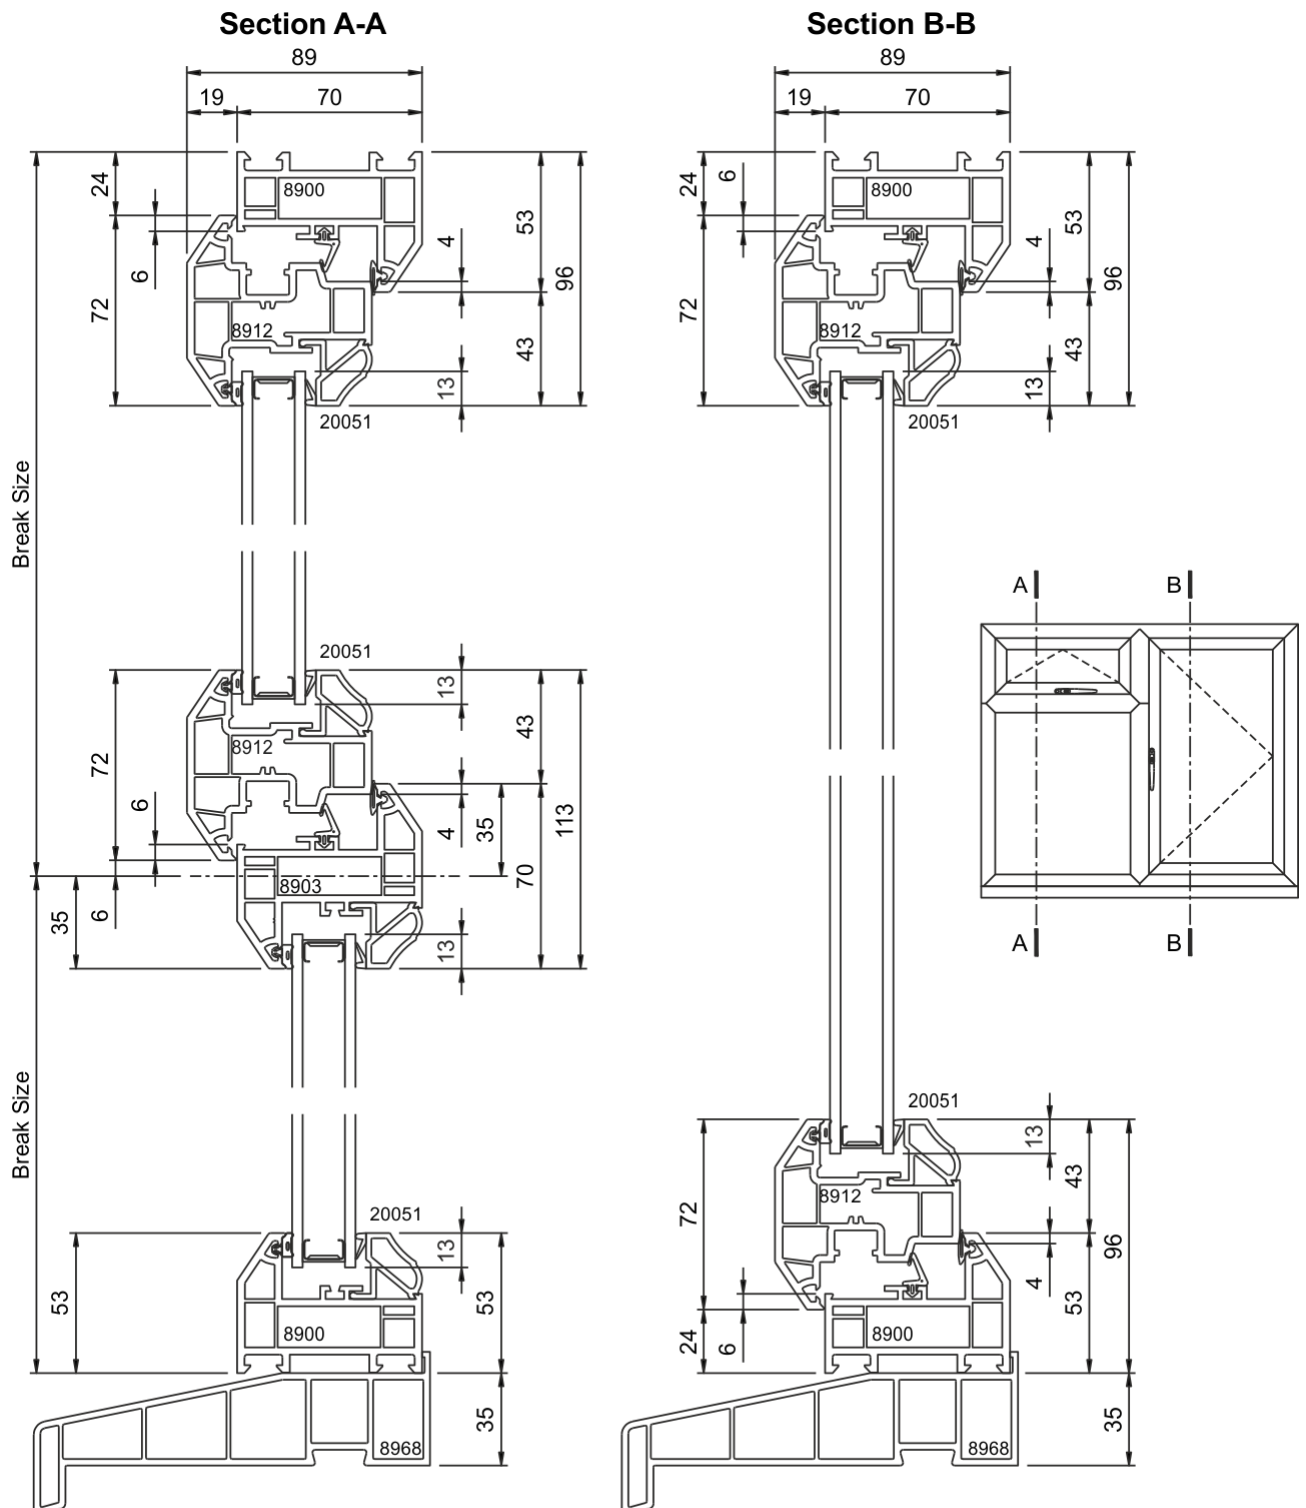


(GA/070 Rev: K)


5.2. Vertical Section (TH).

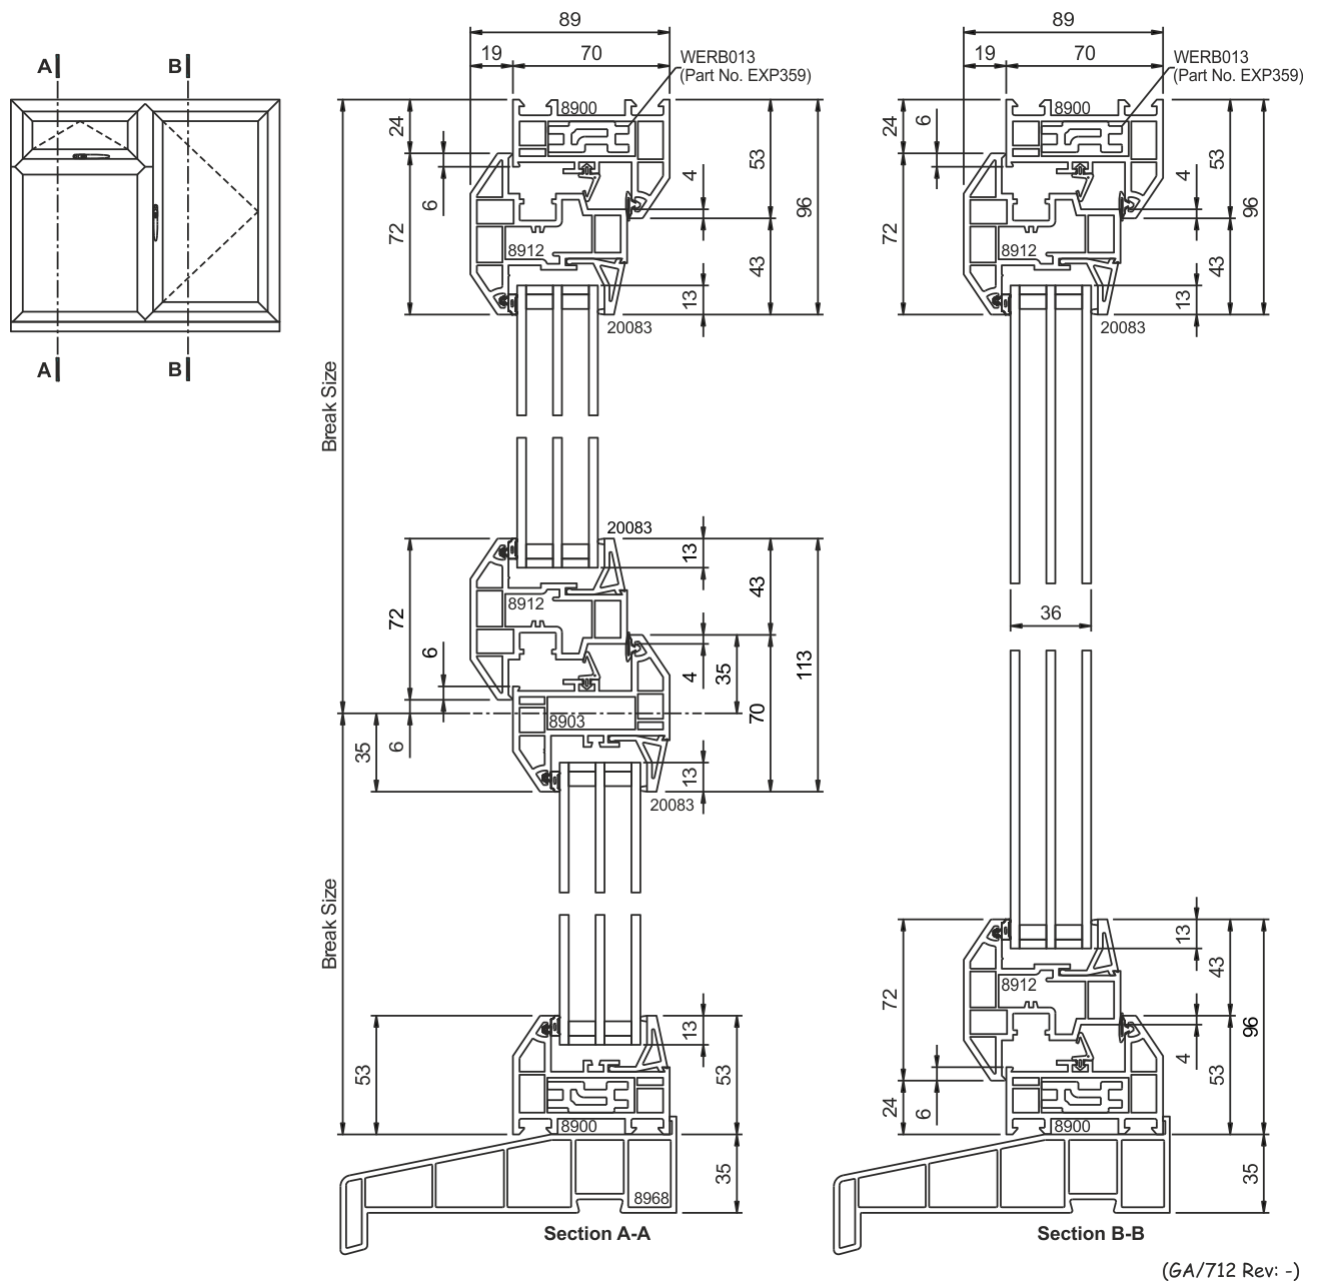


5.3. Horizontal Sections (UH).

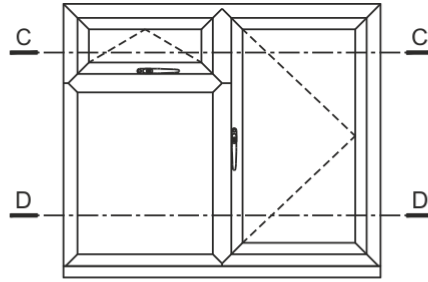

Section C-C



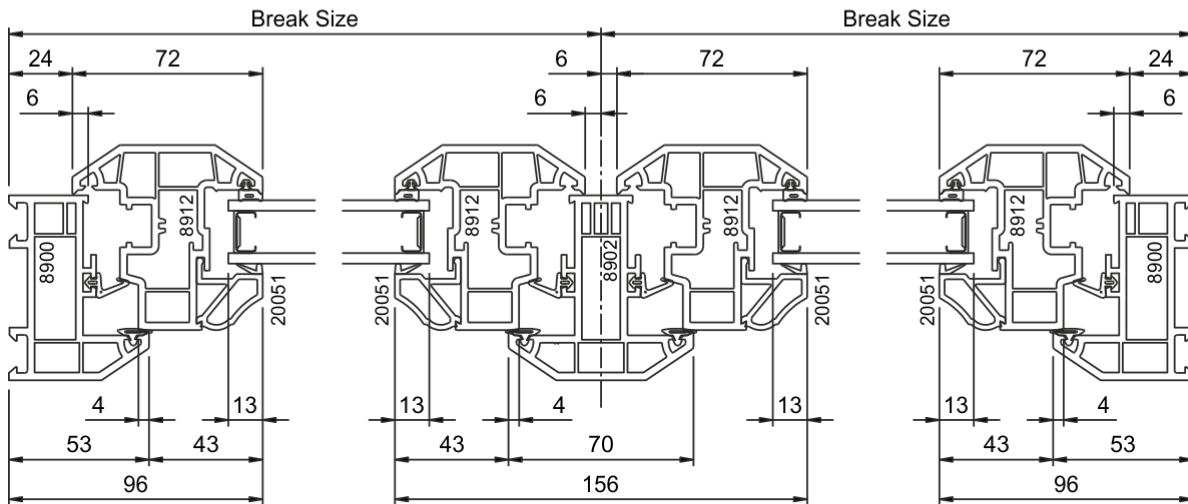


Section D-D

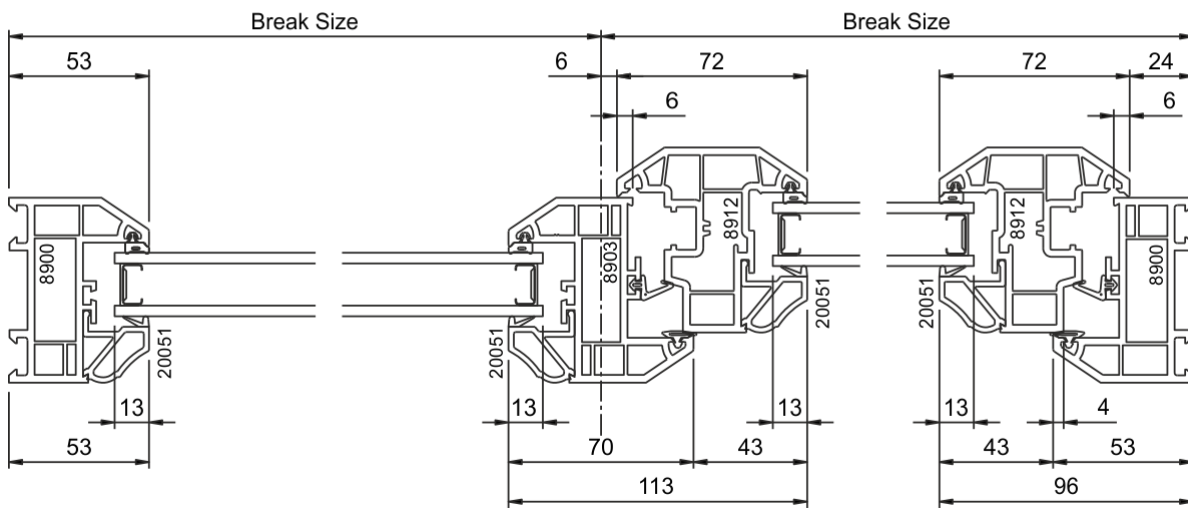

(GA/070 Rev: K)


5.4. Horizontal Sections (TH).

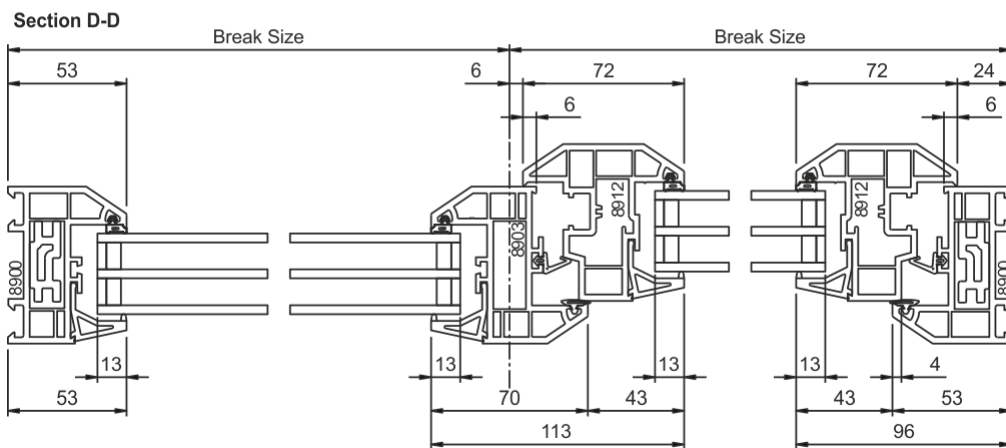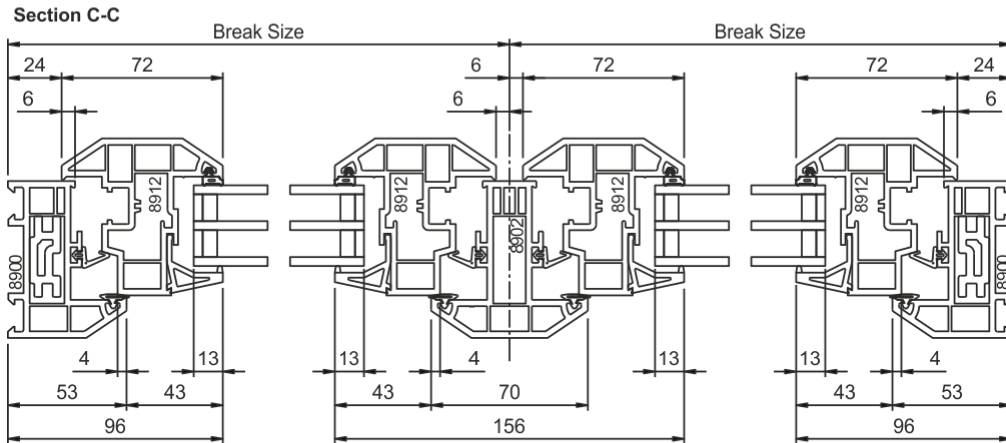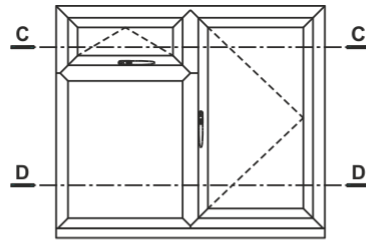


(GA/712 Rev: -)

5.5. Flying Mullion Horizontal Section (UH & TH).

UH product shown – TH product the same except glazing

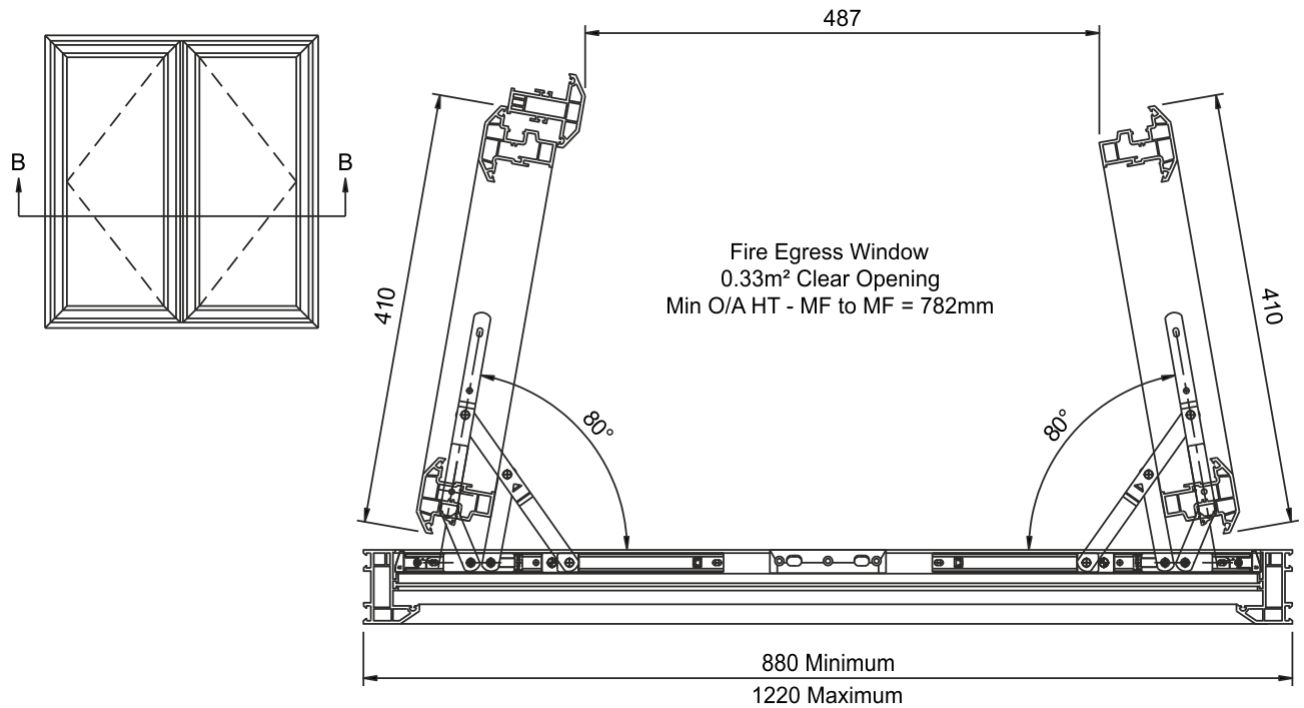



Section B-B

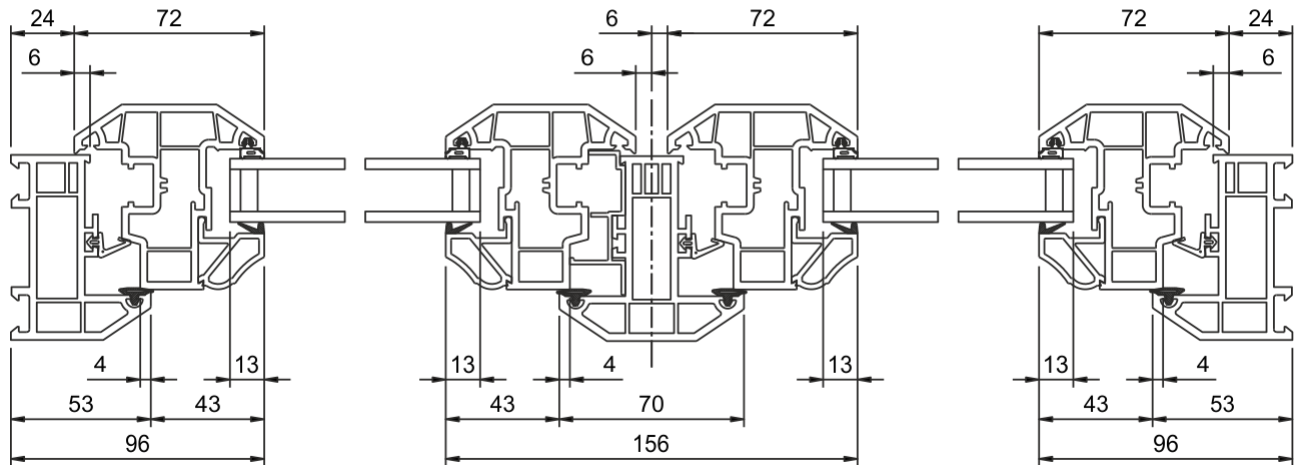

(GA/616 Rev: B)

5.6. Fire Egress Stays.(UH & TH).

UH product shown – TH product the same except glazing

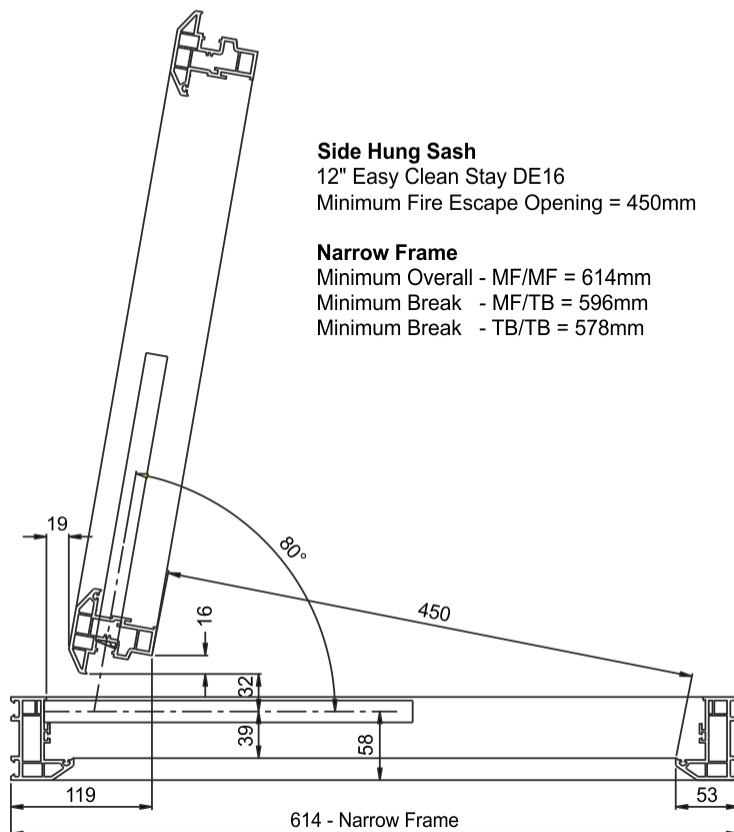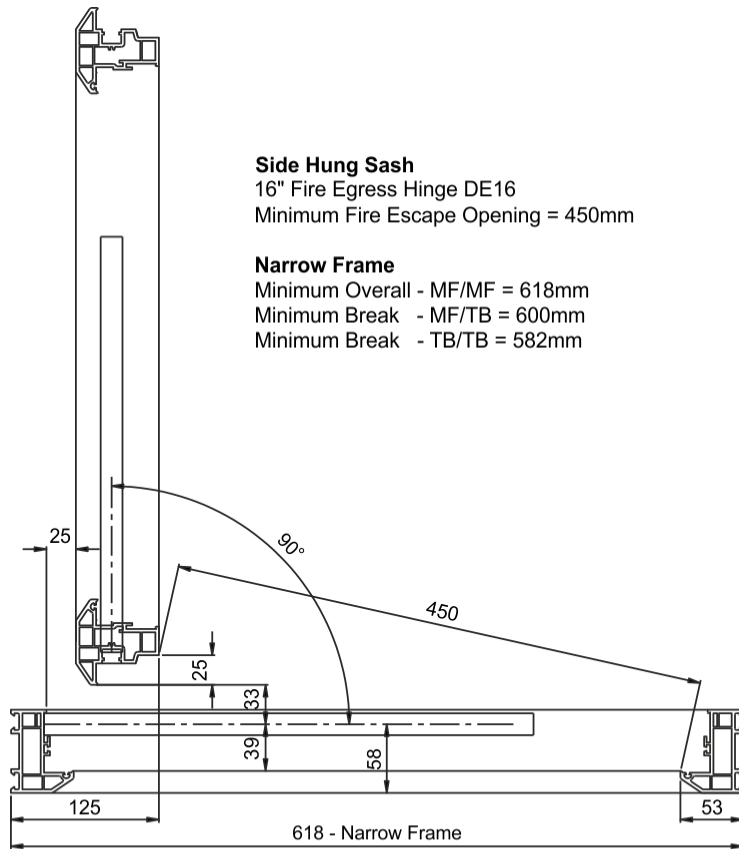

Note:
Maximum height or width determined by weight calculation.
Current Building Regulations state that the minimum unobstructed fire escape openable area must be 0.33m².

(SI/009 Rev: -)