



Drainage Strategy for the Proposed Pitch & Car Park

Openshaw

Blakedown Sport & Play

EPG-9705-DS-01
21.03.22
Rev 1.0

This document prepared by The Environmental Protection Group Limited, its contents and any supporting information relating to this document should not be used for any purpose other than that for which it was prepared and provided. Should the document be forwarded to other parties for information, the whole of the report and any supporting information should be so copied, but no professional liability or warranty shall be extended to other parties by EPG in this connection without the explicit written agreement thereto by EPG.

Project No: EPG 9705

Prepared by: John Roberts

Date: 21.03.22

Contents

1	Summary	2
2	Drainage Proposals.....	3
2.1	Design Parameters	3
2.2	Calculation Inputs	3
3	Proposed Design & Calculations	4
4	Maintenance	5
5	Appendix A:	7
	Proposed Drainage layout & Details	7
6	Appendix B:	9
	BGS Borehole	9
7	Appendix C:	11
	Proposed Microdrainage Calculations	11

1 SUMMARY

The following proposal outlines the storm water management system proposed for an Artificial Turf Pitch (ATP) and a car park at Openshaw Academy, Manchester.

The development is accessed from Whitworth Street to the north of the development. The proposed pitch shall be of permeable construction and be laid flat. The car park shall fall from east to west with temporary coach parking to the northern section.

The runoff from the pitch will percolate through the porous surfacing courses into a porous sub-base (30% void material). The pitch will be flow controlled and shall discharge to the car park attenuation tank. The car park drainage outfall will be restricted to less than 5 l/s during the proposed 1in100+40% climate change event.



Fig 1. Proposed location plan

2 DRAINAGE PROPOSALS

2.1 Design Parameters

EPG has reviewed the information provided and considered an approach based on previous experience of similar sites and current SuDS guidance provided in:

- National Planning Policy Framework (NPPF 25)
- Local/Regional Sustainable drainage plans/requirements
- CIRIA report C753 (2016); The SUDS manual
- CIRIA report C680 (2008); Structural design of modular geocellular drainage tanks
- CIRIA Report C724 (2013) Creating water sensitive places-scoping the potential for water sensitive urban design in the UK
- BS-ISO 24536:2019 – Guidelines for stormwater management in urban areas.

The NPPF requires that surface water arising from a developed site should as far as practicable be managed in a sustainable manner to mimic the surface water flows arising from the site prior to re-development. Opportunities to reduce the surface water run-off and the associated flood risk should be identified and climate change should be taken into account. Building Regulations (Part H), NPPF and Environment Agency advice notes require the consideration of sustainable drainage techniques based on a hierarchical approach to the management of surface water, with the emphasis on the use of Source Control techniques and a treatment train as the preferred option.

2.2 Calculation Inputs

Cv:	0.750 (summer) & 0.840 (winter)
M5-60:	18.000
Ratio, R:	0.360
Storm Durations:	15 mins to 10080 mins
Catchment Area Pitch & Car Park:	1 ha
Infiltration:	0 m/s
Design Flow Rate:	5 l/s
Design Storm:	1in100 year
Climate Change:	40%

3 PROPOSED DESIGN & CALCULATIONS

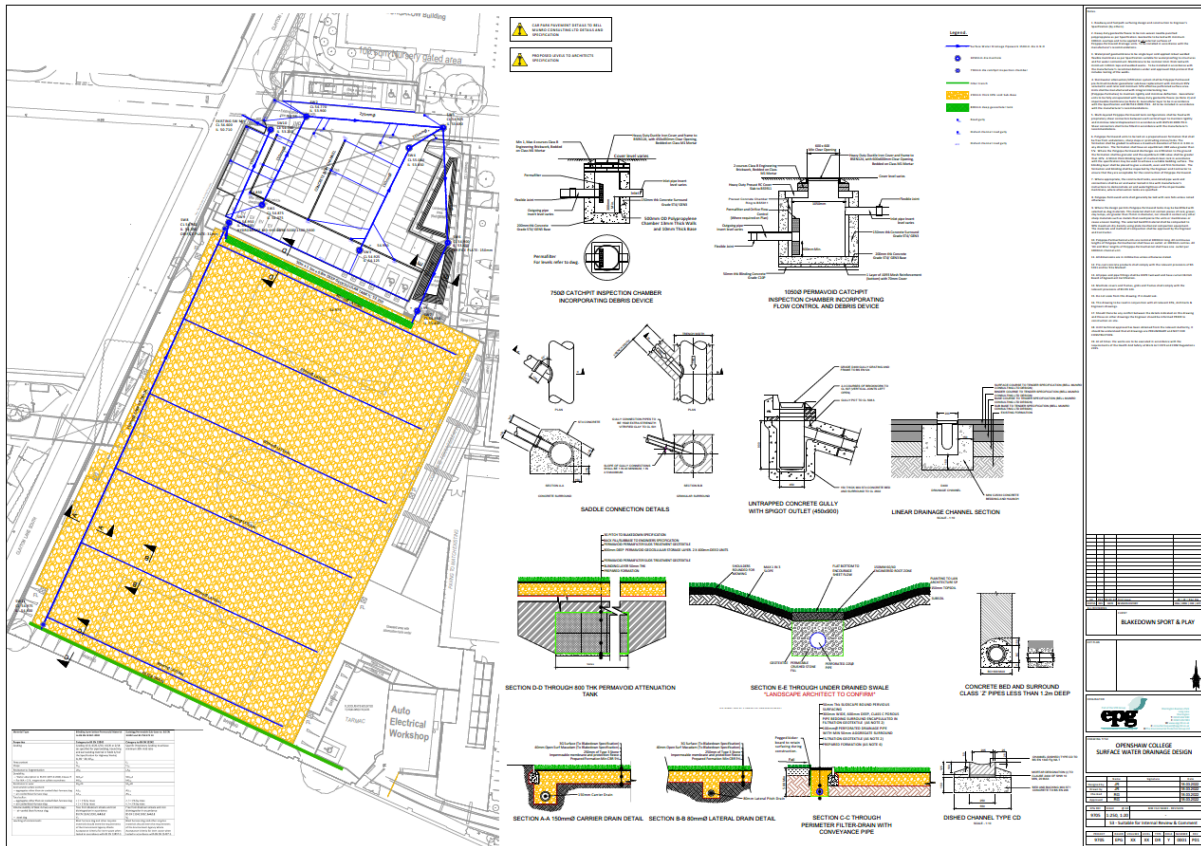


Fig 2. Snapshot of the proposed design

The proposed SuDS system is designed to restricted to 5 l/s during the 100-year storm event plus an additional 40% for climate change below ground. The proposed drainage layout and details can be found in Appendix A. Runoff from the pitch shall enter into the permeable stone sub-base for attenuation. The car park is drained by traditional gullies and channels with attenuation provided within the swales and a geocellular tank located below the pitch sub-base. The pitch and pond drainage systems combine with a restricted discharge of 5 l/s. The site outfalls to the culvert in Clayton Lane South.

Infiltration has been discounted by Bell Munro Consulting Ltd at tender stage due to the poor ground conditions and the raised nature of the development compared to the surrounding topography. A borehole scan from BGS in Appendix B shows the underlying Clay.

Microdrainage design software has been used to determine the storage volume required and the results can be found in Appendix C.

4 MAINTENANCE

We would recommend that Pre-handover inspections are undertaken.

Sports Pitch:

Maintenance schedule	Required action	Typical frequency
Regular maintenance	Remove litter and debris	Once a year, after autumn leaf fall, or reduced frequency as required, based on site-specific observations of clogging or manufacturer's recommendations
Occasional maintenance	Occasional sand re-dressing	As required and to manufacturers guidelines
	Removal of weeds or management using glyphosate applied directly into the weeds by an applicator rather than spraying	As required – once per year on less frequently used pavements
Remedial Actions	Initial inspection	Monthly for three months after installation
Monitoring	Inspect for evidence of poor operation and/or weed growth – if required, take remedial action	Three-monthly, 48 h after large storms in first six months
	Monitor inspection chambers	Annually

Pipework, catchpits and gullies:

Maintenance schedule	Required action	Typical frequency
Regular maintenance	Inspect and identify any pipework that is not operating/flowing correctly. If required, take remedial action	Monthly for 3 months, then annually
	Remove debris and silt from sump chambers	Annually, or as required
Remedial actions	Clear blockages by jetting and line the pipework internally where required	As required
Monitoring	CCTV Drainage Survey	Every 5 years or as required

Geocellular Tanks:

Maintenance schedule	Required action	Typical frequency
Regular maintenance	Inspect and identify any areas that are not operating correctly. If required, take remedial action	Monthly for 3 months, then annually
	Remove debris from the catchment surface (where it may cause risks to performance)	Monthly
	Where rainfall infiltrates into the tank from above, check surface of filter for blockage by sediment, algae or other matter; remove and replace surface infiltration medium as necessary.	Annually
	Remove sediment from pre-treatment components, as Catchpits and gullies above	As necessary – indicated by system inspections or immediately following significant spill
Remedial actions	Repair/rehabilitate inlet, outlet and vent	As required
Monitoring	Inspect/check all inlets, outlets to ensure that they are in good condition and operating as designed	Annually
	Survey inside of tank for sediment build-up and remove if necessary	Every 5 years or as required

Accidental Spillages

Any accidental spillages will be of a domestic nature. And should be dealt with quickly and appropriately.

As soon as a spillage is identified, the outlet inlets should be covered to prevent pollution entering the system

- Washdown and dilute affected area.
- Empty inspection chamber of all pollution that has entered.


Management

It is understood that Openshaw College will undertake the maintenance and management duties for the pitch. The management team must be aware that the sub-base below the surfacing layer is necessary to manage the drainage of the pitch. They should inform any contractor working on any future repairs of the presence and requirement of the sub-base drainage system.


Openshaw College should keep records of all inspections and maintenance.

5 APPENDIX A:


Proposed Drainage layout & Details

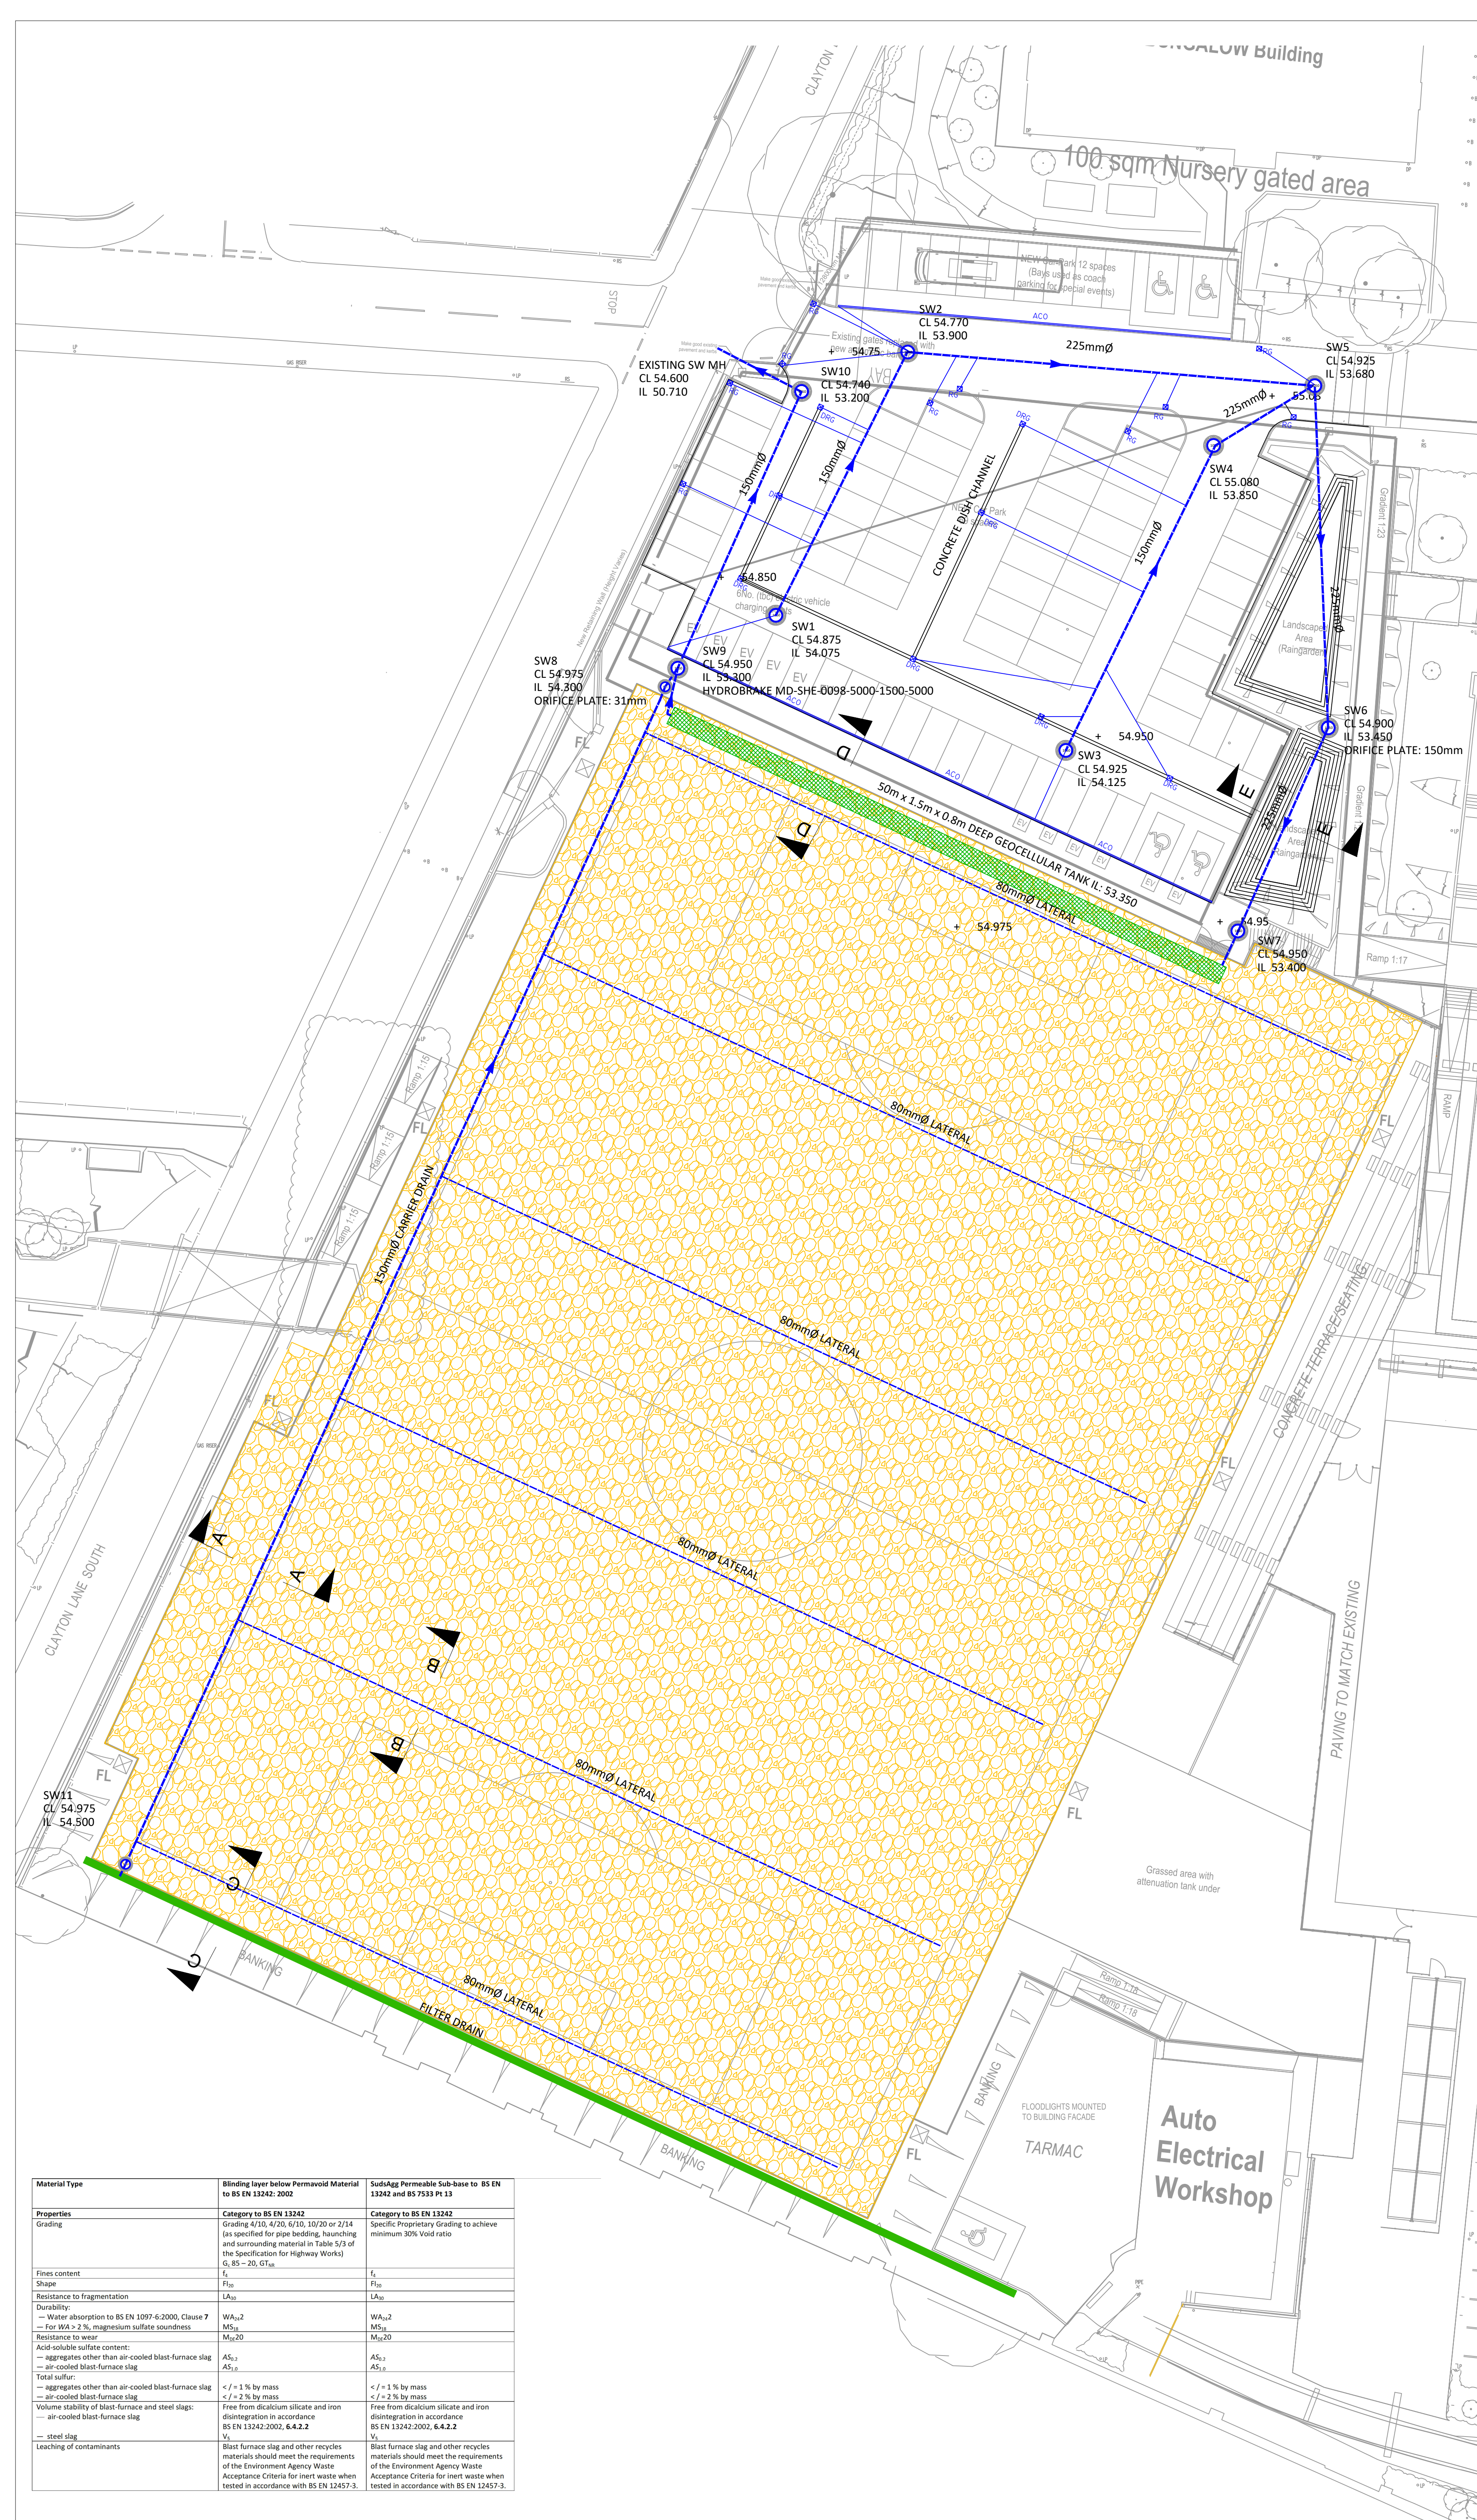


- CAR PARK PAVEMENT DETAILS TO BELL MUNRO CONSULTING LTD DETAILS AND SPECIFICATION
- PROPOSED LEVELS TO ARCHITECTS SPECIFICATION

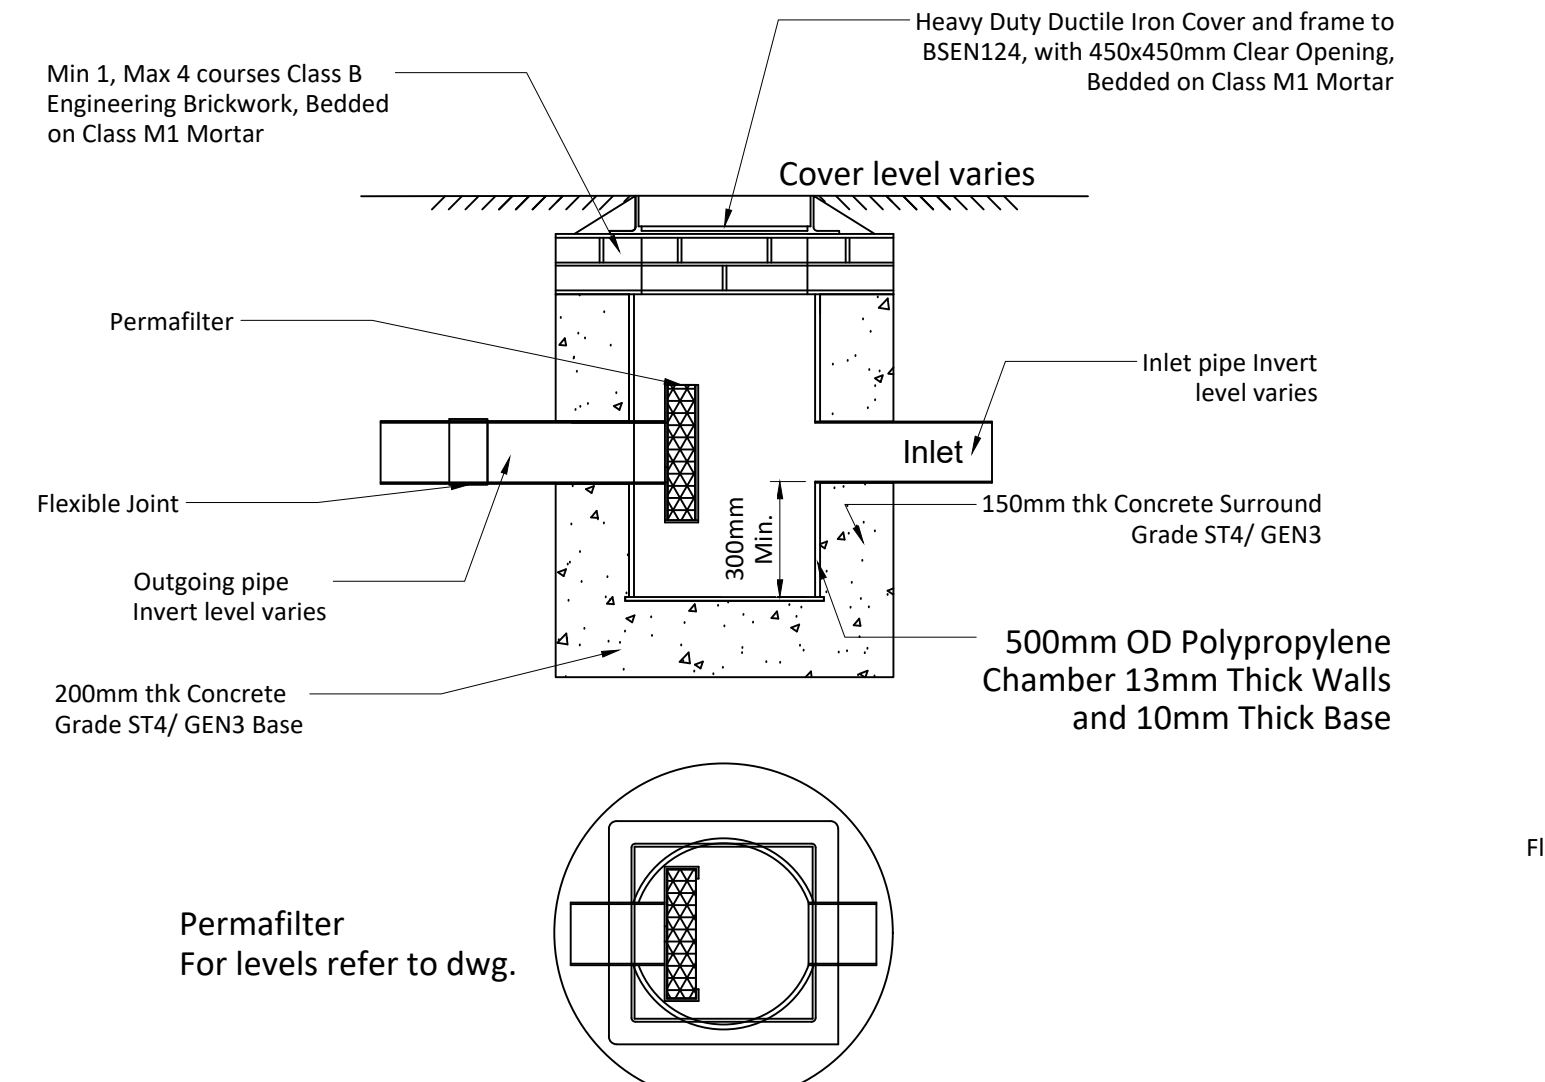

7500 CATCHPIT INSPECTION CHAMBER INCORPORATING DEBRIS DEVICE

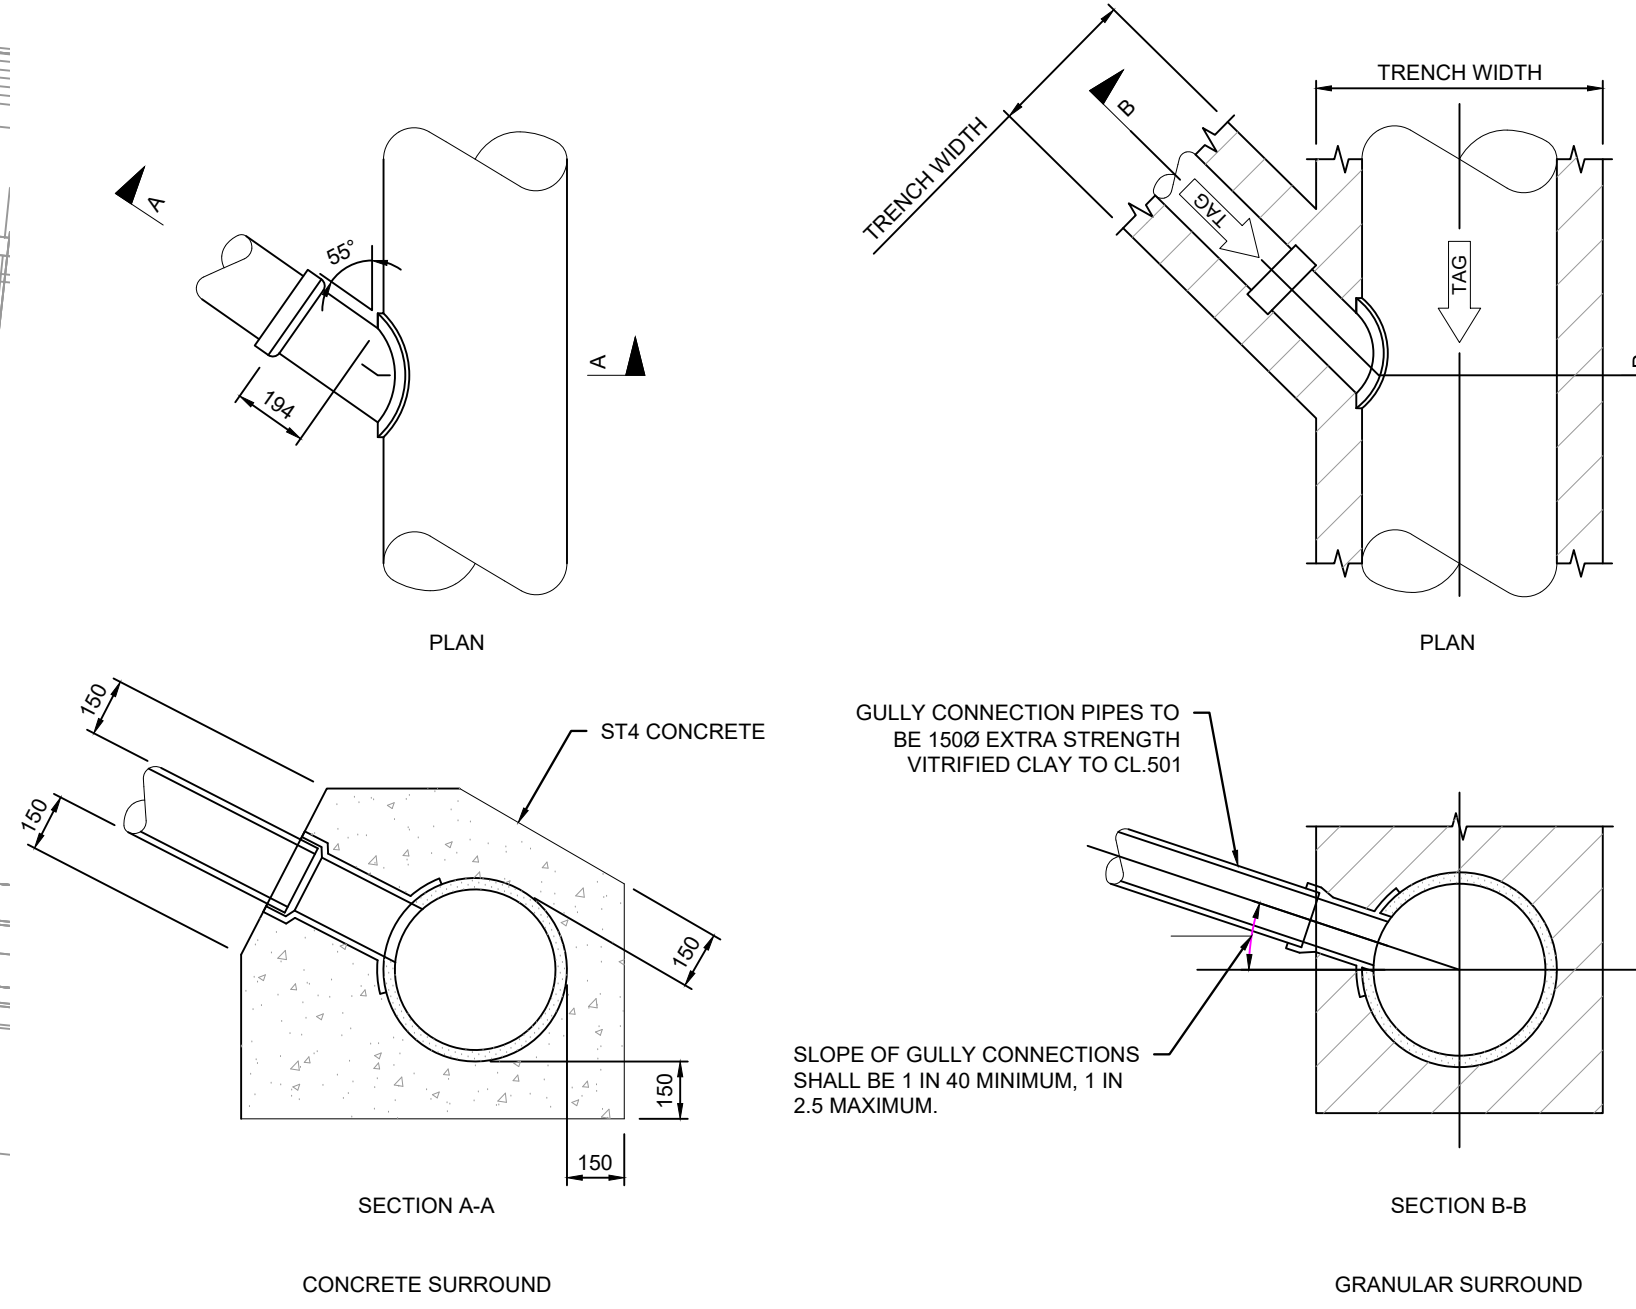

10500 PERMAVOID CATCHPIT INSPECTION CHAMBER INCORPORATING FLOW CONTROL AND DEBRIS DEVICE

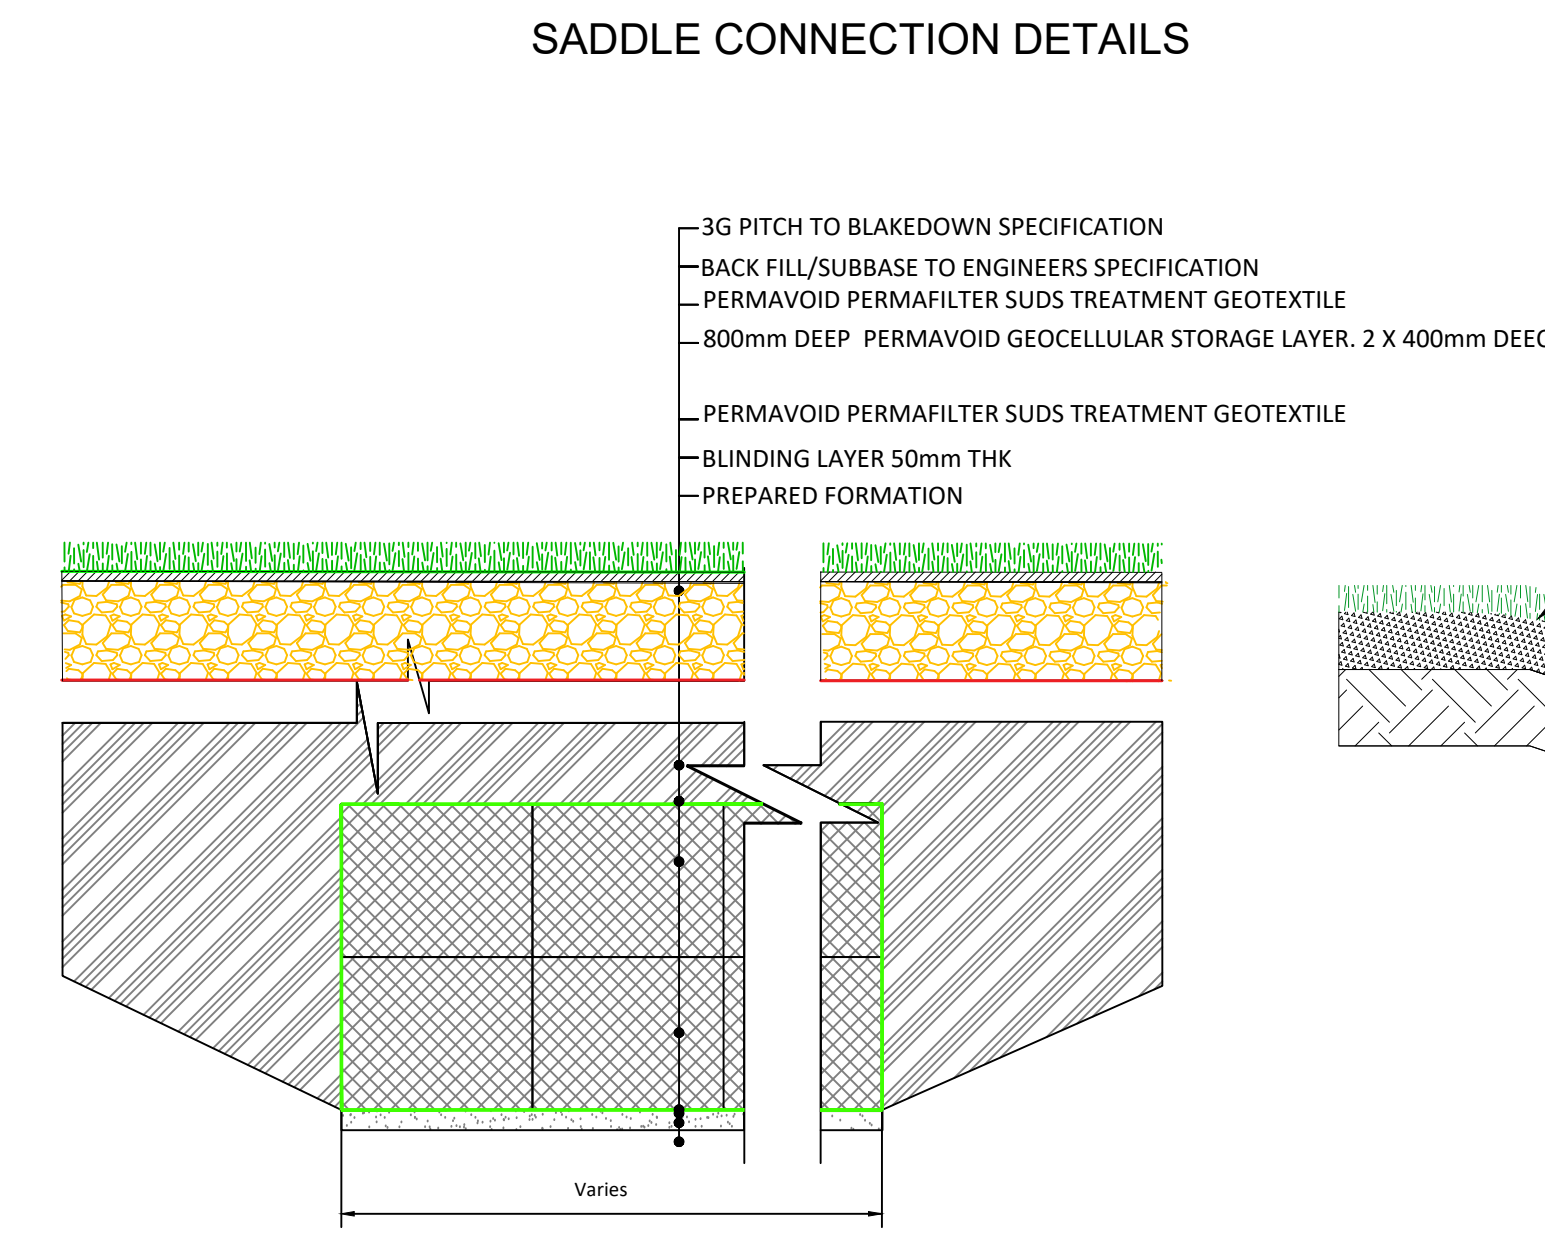

SADDLE CONNECTION DETAILS


UNTRAPPED CONCRETE GULLY WITH SPIGOT OUTLET (450X900)

LINEAR DRAINAGE CHANNEL SECTION


SECTION D-D THROUGH 800 THK PERMAVOID ATTENUATION TANK

SECTION E-E THROUGH UNDER DRAINED SWALE "LANDSCAPE ARCHITECT TO CONFIRM"


CONCRETE BED AND SURROUND CLASS 'Z' PIPES LESS THAN 1.2m DEEP

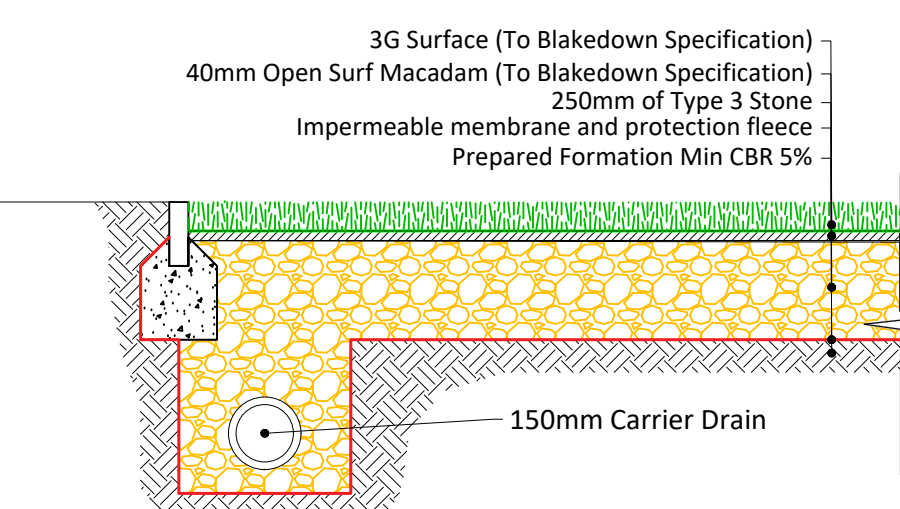


SECTION A-A 150mm CARRIER DRAIN DETAIL

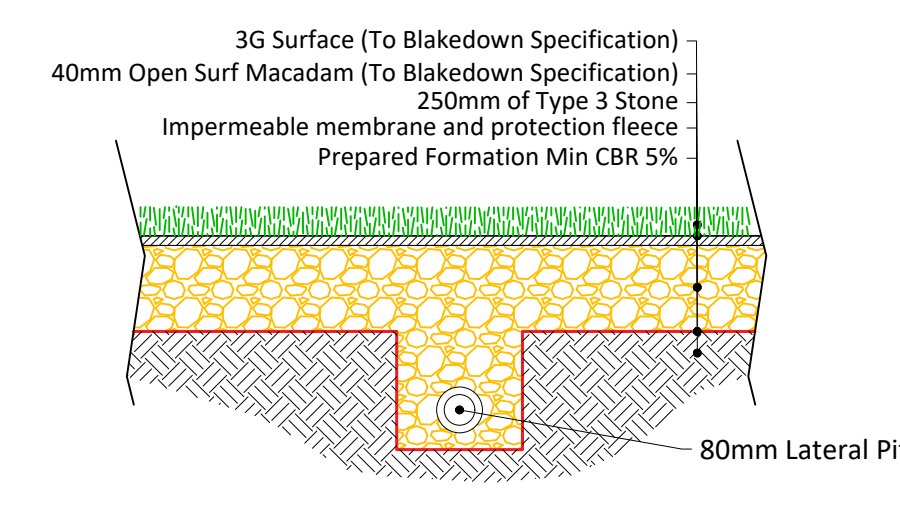

SECTION B-B 80mm LATERAL DRAIN DETAIL

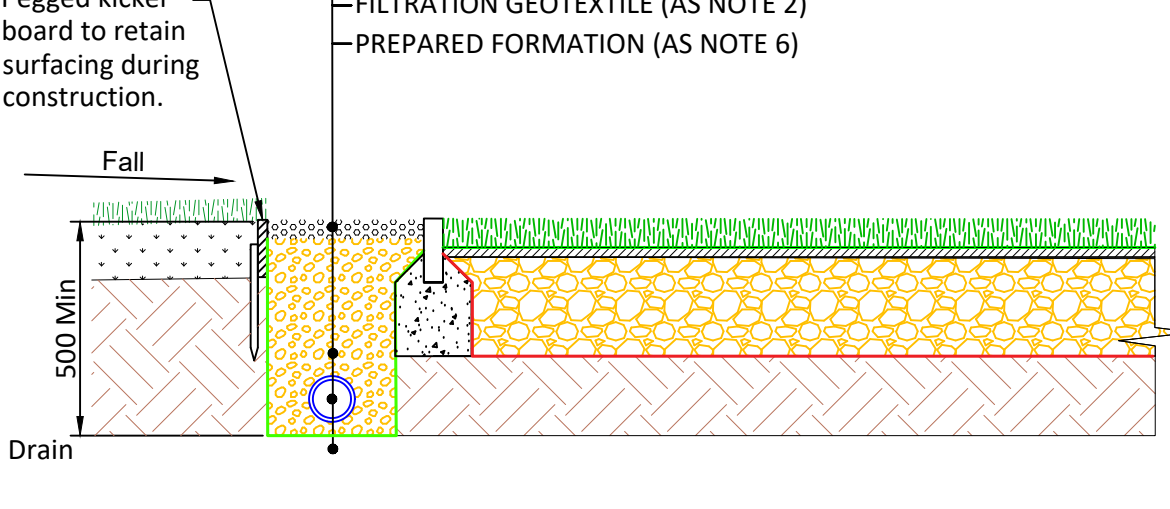

SECTION C-C THROUGH PERIMETER FILTER-RAIN WITH CONVEYANCE PIPE

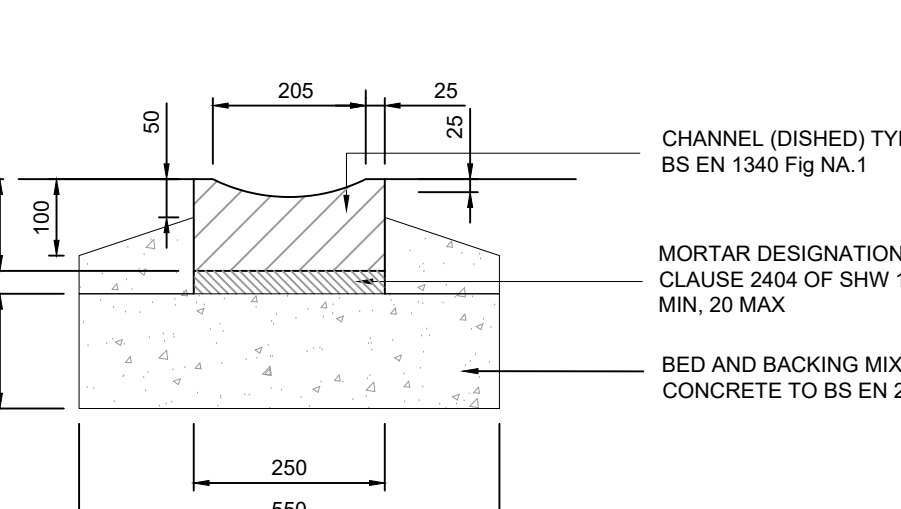

DISHED CHANNEL TYPE CD

Material Type	Blinding layer below Permavoid Material to BS EN 1242: 2002	Sub-Aggr Permavoid Sub-base to BS EN 1242 and BS 7533 P13
Properties	Category to BS EN 1242: 2002	Category to BS EN 1242: 2002
Grading	Grading to BS EN 1242: 2002 or 2/14 (as specified for pipe bedding, haunching and surrounding material in Table 5.1 of the Specification for Highway Works)	Specific Properties Grading to achieve minimum 30% void ratio
Friction content	Friction content to BS EN 1242: 2002	Friction content to BS EN 1242: 2002
Shape	Shape to BS EN 1242: 2002	Shape to BS EN 1242: 2002
Resistance to fragmentation	Resistance to fragmentation to BS EN 1242: 2002	Resistance to fragmentation to BS EN 1242: 2002
Durability	Durability to BS EN 1242: 2002	Durability to BS EN 1242: 2002
Resistance to wear	Resistance to wear to BS EN 1242: 2002	Resistance to wear to BS EN 1242: 2002
Acid-soluble sulfate content	Acid-soluble sulfate content to BS EN 1242: 2002	Acid-soluble sulfate content to BS EN 1242: 2002
Total surface	Total surface to BS EN 1242: 2002	Total surface to BS EN 1242: 2002
Volume stability of base furnace and steel stages	Volume stability of base furnace and steel stages to BS EN 1242: 2002	Volume stability of base furnace and steel stages to BS EN 1242: 2002
Leaching of contaminants	Leaching of contaminants to BS EN 1242: 2002	Leaching of contaminants to BS EN 1242: 2002

Legend.

- Surface Water Drainage Pipework 150mm dia U.N.O.
- 1050mm dia manhole
- 750mm dia catchpit inspection chamber
- Filter trench
- 250mm thick 30% void Sub-Base
- 800mm deep geocellular tank
- Road gully
- Dished channel road gully
- Dished channel road gully

- Notes.
- Roadway and footpath surfacing design and construction to Engineer's Specification (by others).
 - Heavy duty geotextile fleece to be non-woven needle-punched polypropylene as per Specification. Geotextile to be laid with minimum 300mm overlaps and to be applied to all external surfaces of Polypipe-Permavoid drainage units. To be installed in accordance with the manufacturer's recommendations.
 - Waterproof geomembrane to be single layer cold applied robust welded flexible membrane as per Specification suitable for waterproofing to structures and for water containment. Membrane to be nominal 1mm thick laid with minimum 120mm laps and welded seams. To be installed in accordance with the manufacturer's recommendations under approved CDM protocol that includes testing of the welds.
 - Stormwater attenuation/infiltration system shall be Polypipe Permavoid pre-formed modular geocellular sub-base replacement with minimum 95% volumetric void ratio and minimum 52% effective perforated surface area. Units shall be manufactured with integral interlocking ties (Polypipe Permavoid) to maintain rigidity and minimise deflection. Geocellular units to be fully encapsulated with Heavy duty geotextile fleece (as Note 2) and impermeable membrane (as Note 3). Geocellular layer to be in accordance with the Specification and BS7533:2009 P13.3. All to be installed in accordance with the manufacturer's recommendations.
 - Multi-layered Polypipe Permavoid tank configurations shall be fixed with proprietary shear connectors between each vertical layer to maintain rigidity and minimise lateral displacement in accordance with BS7533:2009 P13.3. Shear connectors shall be fitted in accordance with the manufacturer's recommendations.
 - Polypipe Permavoid units to be laid on a prepared even formation that shall be free from undulations, sharp dips or protruding stones/rocks. The formation shall be graded to achieve a maximum deviation of 5mm in 3.0m in any direction. The formation shall have an equilibrium CBR value greater than 5%. Where the Polypipe Permavoid discharges via infiltration to the ground the formation shall be granular and the equilibrium CBR value shall be greater than 10%. A 50mm thick blinding layer of crushed clean rock in accordance with the specification may be used to achieve a suitable bedding surface. The blinding layer shall be placed to give a smooth, even and firm formation. The formation and bedding shall be inspected by the Engineer and Contractor to ensure that they are acceptable for the construction of Polypipe-Permavoid.
 - Where appropriate, the constructed tanks, associated pipe work and connections shall be air and water tested in line with manufacturer's instructions to demonstrate air and watertightness of the impermeable membrane, where attenuation tanks are specified.
 - Polypipe-Permavoid units shall generally be laid with zero falls unless noted otherwise.
 - Where the design permits Polypipe-Permavoid tanks may be backfilled with selected soil materials. This material shall not contain pieces of rock, gravel, clay lumps, etc greater than 75mm in diameter, nor should it contain any other sharp materials such as metals that could pierce the units or membranes or cause uneven loading. The selected backfill material shall be compacted to 90% maximum dry density using plate mechanical compaction equipment. The materials and method of compaction shall be approved by the Engineer and Contractor.
 - Polypipe-Permavoid units are nominal 1000mm long. All continuous lengths of Polypipe-Permavoid shall have an outlet at 1000mm centres. All 'Hit and Miss' lengths of Polypipe-Permavoid shall have one outlet per 1000mm channel unit.
 - All dimensions are in millimetres unless otherwise stated.
 - Pre-cast concrete products shall comply with the relevant provisions of BS 5911 and be 'Site Marked'.
 - All pipes and pipe fittings shall be HDPE twinwall and have current British Board of Agreement Certification.
 - Manhole covers and frames, grids and frames shall comply with the relevant provisions of BS EN 124.
 - Do not scale from this drawing, if in doubt ask.
 - This drawing to be read in conjunction with all relevant EPG, Architects & Engineers drawings.
 - Should there be any conflict between the details indicated on this drawing and those on other drawings the Engineer should be informed PRIOR to construction on site.
 - Until technical approval has been obtained from the relevant Authority, it should be understood that all drawings are PRELIMINARY and NOT FOR CONSTRUCTION.
 - At all times the works are to be executed in accordance with the requirements of the Health and Safety at Work Act 1974 and CDM Regulations 2015.

REV	DATE	REVISION	BY	CHKD	APPD
1	18.03.22	First Issue	JR	RG	RG
2	18.03.22	Revision History	JR	RG	RG
3	18.03.22	Revision History	JR	RG	RG
4	18.03.22	Revision History	JR	RG	RG
5	18.03.22	Revision History	JR	RG	RG
6	18.03.22	Revision History	JR	RG	RG
7	18.03.22	Revision History	JR	RG	RG
8	18.03.22	Revision History	JR	RG	RG
9	18.03.22	Revision History	JR	RG	RG
10	18.03.22	Revision History	JR	RG	RG
11	18.03.22	Revision History	JR	RG	RG
12	18.03.22	Revision History	JR	RG	RG
13	18.03.22	Revision History	JR	RG	RG
14	18.03.22	Revision History	JR	RG	RG
15	18.03.22	Revision History	JR	RG	RG
16	18.03.22	Revision History	JR	RG	RG
17	18.03.22	Revision History	JR	RG	RG
18	18.03.22	Revision History	JR	RG	RG
19	18.03.22	Revision History	JR	RG	RG
20	18.03.22	Revision History	JR	RG	RG
21	18.03.22	Revision History	JR	RG	RG
22	18.03.22	Revision History	JR	RG	RG
23	18.03.22	Revision History	JR	RG	RG
24	18.03.22	Revision History	JR	RG	RG
25	18.03.22	Revision History	JR	RG	RG
26	18.03.22	Revision History	JR	RG	RG
27	18.03.22	Revision History	JR	RG	RG
28	18.03.22	Revision History	JR	RG	RG
29	18.03.22	Revision History	JR	RG	RG
30	18.03.22	Revision History	JR	RG	RG
31	18.03.22	Revision History	JR	RG	RG
32	18.03.22	Revision History	JR	RG	RG
33	18.03.22	Revision History	JR	RG	RG
34	18.03.22	Revision History	JR	RG	RG
35	18.03.22	Revision History	JR	RG	RG
36	18.03.22	Revision History	JR	RG	RG
37	18.03.22	Revision History	JR	RG	RG
38	18.03.22	Revision History	JR	RG	RG
39	18.03.22	Revision History	JR	RG	RG
40	18.03.22	Revision History	JR	RG	RG
41	18.03.22	Revision History	JR	RG	RG
42	18.03.22	Revision History	JR	RG	RG
43	18.03.22	Revision History	JR	RG	RG
44	18.03.22	Revision History	JR	RG	RG
45	18.03.22	Revision History	JR	RG	RG
46	18.03.22	Revision History	JR	RG	RG
47	18.03.22	Revision History	JR	RG	RG
48	18.03.22	Revision History	JR	RG	RG
49	18.03.22	Revision History	JR	RG	RG
50	18.03.22	Revision History	JR	RG	RG
51	18.03.22	Revision History	JR	RG	RG
52	18.03.22	Revision History	JR	RG	RG
53	18.03.22	Revision History	JR	RG	RG
54	18.03.22	Revision History	JR	RG	RG
55	18.03.22	Revision History	JR	RG	RG
56	18.03.22	Revision History	JR	RG	RG
57	18.03.22	Revision History	JR	RG	RG
58	18.03.22	Revision History	JR	RG	RG
59	18.03.22	Revision History	JR	RG	RG
60	18.03.22	Revision History	JR	RG	RG
61	18.03.22	Revision History	JR	RG	RG
62	18.03.22	Revision History	JR	RG	RG
63	18.03.22	Revision History	JR	RG	RG
64	18.03.22	Revision History	JR	RG	RG
65	18.03.22	Revision History	JR	RG	RG
66	18.03.22	Revision History	JR	RG	RG
67	18.03.22	Revision History	JR	RG	RG
68	18.03.22	Revision History	JR	RG	RG
69	18.03.22	Revision History	JR	RG	RG
70	18.03.22	Revision History	JR	RG	RG
71	18.03.22	Revision History	JR	RG	RG
72	18.03.22	Revision History	JR	RG	RG
73	18.03.22	Revision History	JR	RG	RG
74	18.03.22	Revision History	JR	RG	RG
75	18.03.22	Revision History	JR	RG	RG
76	18.03.22	Revision History	JR	RG	RG
77	18.03.22	Revision History	JR	RG	RG
78	18.03.22	Revision History	JR	RG	RG
79	18.03.22	Revision History	JR	RG	RG
80	18.03.22	Revision History	JR	RG	RG
81	18.03.22	Revision History	JR	RG	RG
82	18.03.22	Revision History	JR	RG	RG
83	18.03.22	Revision History	JR	RG	RG
84	18.03.22	Revision History	JR	RG	RG
85	18.03.22	Revision History	JR	RG	RG
86	18.03.22	Revision History	JR	RG	RG
87	18.03.22	Revision History	JR	RG	RG
88	18.03.22	Revision History	JR	RG	RG
89	18.03.22	Revision History	JR	RG	RG
90	18.03.22	Revision History	JR	RG	RG
91	18.03.22	Revision History	JR	RG	RG
92	18.03.22	Revision History	JR	RG	RG
93	18.03.22	Revision History	JR	RG	RG
94	18.03.22	Revision History	JR	RG	RG
95	18.03.22	Revision History	JR	RG	RG
96	18.03.22	Revision History	JR	RG	RG
97	18.03.22	Revision History	JR	RG	RG
98	18.03.22	Revision History	JR	RG	RG
99	18.03.22	Revision History	JR	RG	RG
100	18.03.22	Revision History	JR	RG	RG

BLAKEDOWN SPORT & PLAY

KEY PLAN



ORIGINATOR



DRAWING TITLE

OPENSHAW COLLEGE SURFACE WATER DRAINAGE DESIGN

Designed by	Name	Signature	Date
Checked	JR		18.03.2022
Approved	RG		18.03.2022

PG REF SCALE @ AD BIM FILE NAME - REVISION

PROJECT	ISSUE	VOLUME	LEVEL	TYPE	ROLE	NUMBER	REV
9705	EPG	XX	XX	DR	Y	0001	EP1

6 APPENDIX B:

BGS Borehole

STRATA SURVEYS LTD., Telephone: 0606 834637 Fax: 0606 836657						Borehole Number : 3 Sheet 1 of 1.						
Job Number : 6555/3 Location : Manchester Alluminium Plant Client : Manchester City Council						Dia. 6 Drilling Methods 150mm Diameter light cable percussion						
Description of Strata	Red. Level	Legend	Thick-ness	Depth m	Sample Depths	Sample Types	N Value	Cu	#	Water Level	Piezo -meter	Daily Prog.
MADE GROUND (200mm concrete over very loose black wet ashes cinder gravel and brick pieces)				0.00								
			(1.90)	1.00 1.00 - 1.45	D 1 S 1	N 4						
			1.90	2.00 - 2.45	U 1							
			2.60	2.60	D 2		92 0					
MADE GROUND (firm to stiff brown orange black silty sandy clay with grey fissures, patches of black ash, pockets of sand and silt, and occasional coal inclusions, brick pieces and root penetration) Very stiff brown silty sandy CLAY with grey fissures, gravel and coal inclusions pockets of sand and silt. Band of silt at 6.90m to 6.95m				(0.70)	3.00 - 3.45	U 2						
			3.60	3.60	D 3		307 0					
			4.00 - 4.45	U 3								
			4.60	4.60	D 4		206 0					
			5.00 - 5.45	U 4								
			5.60	5.60	D 5		166 0					
			6.50 - 6.95	U 5								
			7.10	7.10	D 6		177 0					
			8.30 - 8.75	U 6								
			8.90	8.90	D 7		211 0					
Medium dense very clayey slightly gravelly fine grained SAND. A band of Firm brown sandy silty Clay at 9.30 to 9.55m				(1.20)	9.10 - 9.55	D 8 U 7						
			9.70 - 10.15	S 2	N 17	85 0						
			10.10									
--- Borehole Completed ---												22/7
General Remarks : No water encountered during drilling.						Dates : 22 JUL 92 Driller : DM Engineer: Coordinates :						

7 APPENDIX C:

Proposed Microdrainage Calculations

The Environmental Protection Group Ltd

Warrington Business Park
Long Lane
Warrington WA2 8TX

Date 18/03/2022 15:43
File Cascade 2.CASX

XP Solutions

Openshaw
Swale 1

Designed by JHR
Checked by RG

Source Control 2020.1.3

Page 1



Cascade Summary of Results for Car Park Swale 1.SRCX

	Upstream Structures	Outflow To	Overflow To					
	(None)	Car Park Swale 2.SRCX	(None)					
	Half Drain Time : 9 minutes.							
Storm Event	Max Level (m)	Max Depth (m)	Max Infiltration (l/s)	Max Control (l/s)	Max Outflow (l/s)	Max Volume (m³)	Status	
15 min Summer	54.485	0.685	0.0	36.7	36.7	25.6	O K	
30 min Summer	54.751	0.951	0.0	44.0	44.0	26.8	FLOOD	
60 min Summer	54.752	0.952	0.0	44.0	44.0	27.2	FLOOD	
120 min Summer	54.750	0.950	0.0	43.9	43.9	25.7	FLOOD	
180 min Summer	54.136	0.336	0.0	24.0	24.0	24.7	O K	
240 min Summer	54.088	0.288	0.0	21.7	21.7	21.2	O K	
360 min Summer	54.033	0.233	0.0	18.7	18.7	16.2	O K	
480 min Summer	54.003	0.203	0.0	16.3	16.3	13.6	O K	
600 min Summer	53.984	0.184	0.0	14.1	14.1	12.1	O K	
720 min Summer	53.970	0.170	0.0	12.5	12.5	11.0	O K	
960 min Summer	53.949	0.149	0.0	10.2	10.2	9.5	O K	
1440 min Summer	53.925	0.125	0.0	7.7	7.7	7.7	O K	
2160 min Summer	53.902	0.102	0.0	5.6	5.6	6.1	O K	
2880 min Summer	53.888	0.088	0.0	4.5	4.5	5.2	O K	
4320 min Summer	53.876	0.076	0.0	3.3	3.3	4.4	O K	

Storm Event	Rain (mm/hr)	Flooded Volume (m³)	Discharge Volume (m³)	Time-Peak (mins)
15 min Summer	118.613	0.0	44.5	20
30 min Summer	79.413	1.2	59.5	27
60 min Summer	50.812	1.6	76.2	42
120 min Summer	31.468	0.2	94.4	72
180 min Summer	23.466	0.0	105.6	108
240 min Summer	18.940	0.0	113.6	138
360 min Summer	13.882	0.0	124.9	196
480 min Summer	11.143	0.0	133.7	256
600 min Summer	9.389	0.0	140.8	316
720 min Summer	8.158	0.0	146.8	376
960 min Summer	6.531	0.0	156.7	496
1440 min Summer	4.764	0.0	171.5	736
2160 min Summer	3.468	0.0	187.3	1104
2880 min Summer	2.766	0.0	199.1	1464
4320 min Summer	2.007	0.0	216.7	2160

©1982-2020 Innovzyze

The Environmental Protection Group Ltd

Warrington Business Park
Long Lane
Warrington WA2 8TX

Date 18/03/2022 15:43
File Cascade 2.CASX

XP Solutions

Openshaw
Swale 1

Designed by JHR
Checked by RG

Source Control 2020.1.3

Page 2



Cascade Summary of Results for Car Park Swale 1.SRCX

Storm Event	Max Level (m)	Max Depth (m)	Max Infiltration (l/s)	Max Control Σ (l/s)	Max Outflow (l/s)	Max Volume (m³)	Status
5760 min Summer	53.869	0.069	0.0	2.6	2.6	4.0	0 K
7200 min Summer	53.862	0.062	0.0	2.2	2.2	3.6	0 K
8640 min Summer	53.857	0.057	0.0	1.9	1.9	3.3	0 K
10080 min Summer	53.854	0.054	0.0	1.7	1.7	3.0	0 K
15 min Winter	54.751	0.951	0.0	44.0	44.0	26.7	FLOOD
30 min Winter	54.754	0.954	0.0	44.0	44.0	29.3	FLOOD
60 min Winter	54.752	0.952	0.0	44.0	44.0	27.7	FLOOD
120 min Winter	54.416	0.616	0.0	34.5	34.5	25.6	0 K
180 min Winter	54.098	0.298	0.0	22.2	22.2	22.2	0 K
240 min Winter	54.050	0.250	0.0	19.7	19.7	17.7	0 K
360 min Winter	53.998	0.198	0.0	15.7	15.7	13.2	0 K
480 min Winter	53.972	0.172	0.0	12.8	12.8	11.2	0 K
600 min Winter	53.955	0.155	0.0	10.9	10.9	9.9	0 K
720 min Winter	53.943	0.143	0.0	9.5	9.5	9.0	0 K
960 min Winter	53.925	0.125	0.0	7.7	7.7	7.7	0 K
1440 min Winter	53.901	0.101	0.0	5.6	5.6	6.1	0 K
2160 min Winter	53.884	0.084	0.0	4.1	4.1	4.9	0 K
2880 min Winter	53.876	0.076	0.0	3.3	3.3	4.4	0 K
4320 min Winter	53.865	0.065	0.0	2.4	2.4	3.8	0 K

Storm Event	Rain (mm/hr)	Flooded Volume (m³)	Discharge Volume (m³)	Time-Peak (mins)
5760 min Summer	1.596	0.0	229.8	2928
7200 min Summer	1.336	0.0	240.4	3672
8640 min Summer	1.154	0.0	249.3	4392
10080 min Summer	1.020	0.0	257.0	5008
15 min Winter	118.613	1.1	49.8	19
30 min Winter	79.413	3.7	66.7	28
60 min Winter	50.812	2.1	85.3	42
120 min Winter	31.468	0.0	105.7	74
180 min Winter	23.466	0.0	118.2	110
240 min Winter	18.940	0.0	127.2	140
360 min Winter	13.882	0.0	139.9	198
480 min Winter	11.143	0.0	149.7	256
600 min Winter	9.389	0.0	157.7	316
720 min Winter	8.158	0.0	164.4	376
960 min Winter	6.531	0.0	175.5	496
1440 min Winter	4.764	0.0	192.1	738
2160 min Winter	3.468	0.0	209.7	1092
2880 min Winter	2.766	0.0	223.0	1444
4320 min Winter	2.007	0.0	242.7	2172

©1982-2020 Innovyeze



Rainfall Model	FSR	Winter Storms	Yes
Return Period (years)	100	Cv (Summer)	0.750
Region	England and Wales	Cv (Winter)	0.840
M5-60 (mm)	18.000	Shortest Storm (mins)	15
Ratio R	0.360	Longest Storm (mins)	10080
Summer Storms	Yes	Climate Change %	+40

Total Area (ha) 0.200

©1982-2020 Innovyze

The Environmental Protection Group Ltd		Page 5
Warrington Business Park Long Lane Warrington WA2 8TX	Openshaw Swale 1	
Date 18/03/2022 15:43 File Cascade 2.CASX	Designed by JHR Checked by RG	
XP Solutions	Source Control 2020.1.3	

Cascade Model Details for Car Park Swale 1.SRCX

Storage is Online Cover Level (m) 54.750

Complex Structure

Tank or Pond

Invert Level (m) 53.800

Depth (m)	Area (m ²)	Depth (m)	Area (m ²)	Depth (m)	Area (m ²)	Depth (m)	Area (m ²)
0.000	53.5	0.700	0.0	1.400	0.0	2.100	0.0
0.100	66.7	0.800	0.0	1.500	0.0	2.200	0.0
0.200	81.4	0.900	0.0	1.600	0.0	2.300	0.0
0.300	97.5	1.000	0.0	1.700	0.0	2.400	0.0
0.400	0.0	1.100	0.0	1.800	0.0	2.500	0.0
0.500	0.0	1.200	0.0	1.900	0.0		
0.600	0.0	1.300	0.0	2.000	0.0		

Orifice Outflow Control

Diameter (m) 0.150 Discharge Coefficient 0.600 Invert Level (m) 53.800

The Environmental Protection Group Ltd							Page 1
Warrington Business Park Long Lane Warrington WA2 8TX				Openshaw Swale 2			
Date 18/03/2022 15:43 File Cascade 2.CASX				Designed by JHR Checked by RG			
XP Solutions				Source Control 2020.1.3			
<u>Cascade Summary of Results for Car Park Swale 2.SRCX</u>							
Upstream Structures				Outflow To		Overflow To	
Car Park Swale 1.SRCX Proposed 3G Pitch.SRCX				(None)		(None)	
Half Drain Time : 156 minutes.							
Storm Event	Max Level (m)	Max Depth (m)	Max Infiltration (l/s)	Max Control (l/s)	Max Outflow (l/s)	Max Volume (m³)	Status
15 min Summer	53.758	0.458	0.0	4.9	4.9	32.7	0 K
30 min Summer	53.956	0.656	0.0	4.9	4.9	46.7	0 K
60 min Summer	54.112	0.812	0.0	4.9	4.9	61.5	0 K
120 min Summer	54.319	1.019	0.0	4.9	4.9	73.8	0 K
180 min Summer	54.370	1.070	0.0	4.9	4.9	77.1	0 K
240 min Summer	54.369	1.069	0.0	4.9	4.9	77.1	0 K
360 min Summer	54.328	1.028	0.0	4.9	4.9	74.4	0 K
480 min Summer	54.278	0.978	0.0	4.9	4.9	71.3	0 K
600 min Summer	54.218	0.918	0.0	4.9	4.9	68.0	0 K
720 min Summer	54.142	0.842	0.0	4.9	4.9	63.9	0 K
960 min Summer	54.063	0.763	0.0	4.9	4.9	56.2	0 K
1440 min Summer	53.901	0.601	0.0	4.9	4.9	42.8	0 K
2160 min Summer	53.700	0.400	0.0	4.9	4.9	28.5	0 K
2880 min Summer	53.580	0.280	0.0	4.7	4.7	20.0	0 K
4320 min Summer	53.466	0.166	0.0	4.2	4.2	11.8	0 K
Storm Event	Rain (mm/hr)	Flooded Volume (m³)	Discharge Volume (m³)	Time-Peak (mins)			
15 min Summer	118.613	0.0	138.3	51			
30 min Summer	79.413	0.0	157.1	63			
60 min Summer	50.812	0.0	276.5	86			
120 min Summer	31.468	0.0	302.7	136			
180 min Summer	23.466	0.0	318.4	188			
240 min Summer	18.940	0.0	329.4	236			
360 min Summer	13.882	0.0	344.3	300			
480 min Summer	11.143	0.0	355.4	368			
600 min Summer	9.389	0.0	364.0	438			
720 min Summer	8.158	0.0	371.0	500			
960 min Summer	6.531	0.0	381.6	626			
1440 min Summer	4.764	0.0	395.2	874			
2160 min Summer	3.468	0.0	635.5	1220			
2880 min Summer	2.766	0.0	645.1	1564			
4320 min Summer	2.007	0.0	651.0	2256			
©1982-2020 Innovyeze							

The Environmental Protection Group Ltd

Warrington Business Park
Long Lane
Warrington WA2 8TX

Date 18/03/2022 15:43
File Cascade 2.CASX

XP Solutions

Openshaw
Swale 2

Designed by JHR
Checked by RG

Source Control 2020.1.3

Page 2



Cascade Summary of Results for Car Park Swale 2.SRCX

Storm Event	Max Level (m)	Max Depth (m)	Max Infiltration (l/s)	Max Control Σ (l/s)	Max Outflow (l/s)	Max Volume (m³)	Status
5760 min Summer	53.421	0.121	0.0	3.8	3.8	8.6	0 K
7200 min Summer	53.407	0.107	0.0	3.4	3.4	7.6	0 K
8640 min Summer	53.397	0.097	0.0	3.1	3.1	6.9	0 K
10080 min Summer	53.391	0.091	0.0	2.9	2.9	6.5	0 K
15 min Winter	53.830	0.530	0.0	4.9	4.9	37.8	0 K
30 min Winter	54.040	0.740	0.0	4.9	4.9	53.8	0 K
60 min Winter	54.265	0.965	0.0	4.9	4.9	70.6	0 K
120 min Winter	54.464	1.164	0.0	4.9	4.9	84.1	0 K
180 min Winter	54.523	1.223	0.0	4.9	4.9	88.5	0 K
240 min Winter	54.536	1.236	0.0	4.9	4.9	89.0	0 K
360 min Winter	54.482	1.182	0.0	4.9	4.9	85.5	0 K
480 min Winter	54.432	1.132	0.0	4.9	4.9	81.6	0 K
600 min Winter	54.371	1.071	0.0	4.9	4.9	77.2	0 K
720 min Winter	54.297	0.997	0.0	4.9	4.9	72.4	0 K
960 min Winter	54.100	0.800	0.0	4.9	4.9	60.1	0 K
1440 min Winter	53.847	0.547	0.0	4.9	4.9	39.0	0 K
2160 min Winter	53.596	0.296	0.0	4.8	4.8	21.1	0 K
2880 min Winter	53.486	0.186	0.0	4.4	4.4	13.3	0 K
4320 min Winter	53.415	0.115	0.0	3.6	3.6	8.2	0 K

Storm Event	Rain (mm/hr)	Flooded Volume (m³)	Discharge Volume (m³)	Time-Peak (mins)
5760 min Summer	1.596	0.0	1071.4	2944
7200 min Summer	1.336	0.0	1066.0	3680
8640 min Summer	1.154	0.0	1051.1	4416
10080 min Summer	1.020	0.0	1028.9	5144
15 min Winter	118.613	0.0	145.0	52
30 min Winter	79.413	0.0	165.9	65
60 min Winter	50.812	0.0	289.9	90
120 min Winter	31.468	0.0	319.0	136
180 min Winter	23.466	0.0	336.5	188
240 min Winter	18.940	0.0	348.7	240
360 min Winter	13.882	0.0	365.2	314
480 min Winter	11.143	0.0	377.5	386
600 min Winter	9.389	0.0	387.0	464
720 min Winter	8.158	0.0	394.7	544
960 min Winter	6.531	0.0	406.4	686
1440 min Winter	4.764	0.0	421.4	924
2160 min Winter	3.468	0.0	671.5	1256
2880 min Winter	2.766	0.0	681.7	1584
4320 min Winter	2.007	0.0	686.8	2256

©1982-2020 Innovyeze

The Environmental Protection Group Ltd		Page 4
Warrington Business Park Long Lane Warrington WA2 8TX	Openshaw Swale 2	
Date 18/03/2022 15:43 File Cascade 2.CASX	Designed by JHR Checked by RG	
XP Solutions	Source Control 2020.1.3	

Cascade Rainfall Details for Car Park Swale 2.SRCX

Rainfall Model	FSR	Winter Storms	Yes
Return Period (years)	100	Cv (Summer)	0.750
Region	England and Wales	Cv (Winter)	0.840
M5-60 (mm)	18.000	Shortest Storm (mins)	15
Ratio R	0.360	Longest Storm (mins)	10080
Summer Storms	Yes	Climate Change %	+40

Time Area Diagram

Total Area (ha) 0.000

Time (mins)		Area
From:	To:	(ha)
0	4	0.000

The Environmental Protection Group Ltd		Page 5
Warrington Business Park Long Lane Warrington WA2 8TX	Openshaw Swale 2	
Date 18/03/2022 15:43 File Cascade 2.CASX	Designed by JHR Checked by RG	
XP Solutions Source Control 2020.1.3		

Cascade Model Details for Car Park Swale 2.SRCX

Storage is Online Cover Level (m) 54.750

Complex Structure

Cellular Storage

Invert Level (m) 53.300 Safety Factor 2.0
Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95
Infiltration Coefficient Side (m/hr) 0.00000

Depth (m)	Area (m ²)	Inf. Area (m ²)	Depth (m)	Area (m ²)	Inf. Area (m ²)
0.000	75.0	75.0	0.900	0.0	157.4
0.800	75.0	157.4			

Tank or Pond

Invert Level (m) 54.000

Depth (m)	Area (m ²)	Depth (m)	Area (m ²)	Depth (m)	Area (m ²)	Depth (m)	Area (m ²)
0.000	23.7	0.700	0.0	1.400	0.0	2.100	0.0
0.100	40.7	0.800	0.0	1.500	0.0	2.200	0.0
0.200	50.3	0.900	0.0	1.600	0.0	2.300	0.0
0.300	60.6	1.000	0.0	1.700	0.0	2.400	0.0
0.400	71.6	1.100	0.0	1.800	0.0	2.500	0.0
0.500	83.4	1.200	0.0	1.900	0.0		
0.600	0.0	1.300	0.0	2.000	0.0		

Hydro-Brake® Optimum Outflow Control

Unit Reference	MD-SHE-0098-5000-1500-5000
Design Head (m)	1.500
Design Flow (l/s)	5.0
Flush-Flo™	Calculated
Objective	Minimise upstream storage
Application	Surface
Sump Available	Yes
Diameter (mm)	98
Invert Level (m)	53.300
Minimum Outlet Pipe Diameter (mm)	150
Suggested Manhole Diameter (mm)	1200

©1982-2020 Innovyze

The Environmental Protection Group Ltd		Page 6
Warrington Business Park Long Lane Warrington WA2 8TX	Openshaw Swale 2	
Date 18/03/2022 15:43 File Cascade 2.CASX	Designed by JHR Checked by RG	
XP Solutions	Source Control 2020.1.3	

Hydro-Brake® Optimum Outflow Control

Control Points	Head (m)	Flow (l/s)	Control Points	Head (m)	Flow (l/s)
Design Point (Calculated)	1.500	5.0	Kick-Flo®	0.878	3.9
Flush-Flo™	0.431	4.9	Mean Flow over Head Range	-	4.3

The hydrological calculations have been based on the Head/Discharge relationship for the Hydro-Brake® Optimum as specified. Should another type of control device other than a Hydro-Brake Optimum® be utilised then these storage routing calculations will be invalidated

Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	3.2	1.200	4.5	3.000	6.9	7.000	10.3
0.200	4.4	1.400	4.8	3.500	7.4	7.500	10.7
0.300	4.8	1.600	5.1	4.000	7.9	8.000	11.0
0.400	4.9	1.800	5.4	4.500	8.4	8.500	11.3
0.500	4.9	2.000	5.7	5.000	8.8	9.000	11.6
0.600	4.8	2.200	6.0	5.500	9.2	9.500	11.9
0.800	4.3	2.400	6.2	6.000	9.6		
1.000	4.1	2.600	6.5	6.500	10.0		

[illegible]

The Environmental Protection Group Ltd							Page 2
Warrington Business Park Long Lane Warrington WA2 8TX			Openshaw Proposed Pitch				
Date 18/03/2022 15:43 File Cascade 2.CASX			Designed by JHR Checked by RG				
XP Solutions			Source Control 2020.1.3				
Cascade Summary of Results for Proposed 3G Pitch.SRCX							
Storm Event	Max Level (m)	Max Depth (m)	Max Infiltration (l/s)	Max Control Σ (l/s)	Max Outflow (l/s)	Max Volume (m³)	Status
5760 min Summer	54.808	0.233	0.0	1.4	1.4	530.8	0 K
7200 min Summer	54.799	0.224	0.0	1.4	1.4	510.0	0 K
8640 min Summer	54.790	0.215	0.0	1.4	1.4	491.1	0 K
10080 min Summer	54.783	0.208	0.0	1.4	1.4	473.5	0 K
15 min Winter	54.662	0.087	0.0	1.2	1.2	197.3	0 K
30 min Winter	54.691	0.116	0.0	1.2	1.2	263.8	0 K
60 min Winter	54.722	0.147	0.0	1.3	1.3	336.3	0 K
120 min Winter	54.756	0.181	0.0	1.3	1.3	413.6	0 K
180 min Winter	54.776	0.201	0.0	1.4	1.4	459.4	0 K
240 min Winter	54.790	0.215	0.0	1.4	1.4	491.1	0 K
360 min Winter	54.809	0.234	0.0	1.4	1.4	532.9	0 K
480 min Winter	54.822	0.247	0.0	1.4	1.4	563.4	0 K
600 min Winter	54.832	0.257	0.0	1.4	1.4	586.3	0 K
720 min Winter	54.840	0.265	0.0	1.5	1.5	604.3	0 K
960 min Winter	54.852	0.277	0.0	1.5	1.5	630.6	0 K
1440 min Winter	54.865	0.290	0.0	1.5	1.5	660.8	0 K
2160 min Winter	54.872	0.297	0.0	1.5	1.5	678.1	0 K
2880 min Winter	54.873	0.298	0.0	1.5	1.5	678.8	0 K
4320 min Winter	54.863	0.288	0.0	1.5	1.5	657.0	0 K
Storm Event	Rain (mm/hr)	Flooded Volume (m³)	Discharge Volume (m³)	Time-Peak (mins)			
5760 min Summer	1.596	0.0	844.9	4328			
7200 min Summer	1.336	0.0	829.1	5120			
8640 min Summer	1.154	0.0	805.4	5960			
10080 min Summer	1.020	0.0	775.5	6760			
15 min Winter	118.613	0.0	98.7	31			
30 min Winter	79.413	0.0	102.8	45			
60 min Winter	50.812	0.0	208.1	74			
120 min Winter	31.468	0.0	216.9	132			
180 min Winter	23.466	0.0	221.9	192			
240 min Winter	18.940	0.0	225.1	250			
360 min Winter	13.882	0.0	229.0	368			
480 min Winter	11.143	0.0	231.5	484			
600 min Winter	9.389	0.0	233.1	602			
720 min Winter	8.158	0.0	234.1	720			
960 min Winter	6.531	0.0	234.8	954			
1440 min Winter	4.764	0.0	233.3	1420			
2160 min Winter	3.468	0.0	465.6	2104			
2880 min Winter	2.766	0.0	462.5	2776			
4320 min Winter	2.007	0.0	448.1	4032			
©1982-2020 Innovyeze							



**Micro
Drainage**

Storm Event	Max Level (m)	Max Depth (m)	Max Infiltration (l/s)	Max Control Σ (l/s)	Max Outflow (l/s)	Max Volume (m ³)	Status
----------------	---------------------	---------------------	------------------------------	----------------------------------	-------------------------	------------------------------------	--------

Storm Event	Rain (mm/hr)	Flooded Volume (m ³)	Discharge Volume (m ³)	Time-Peak (mins)
5760 min Winter	1.596	0.0	875.5	4568
7200 min Winter	1.336	0.0	863.2	5480
8640 min Winter	1.154	0.0	842.7	6408
10080 min Winter	1.020	0.0	814.0	7360

The Environmental Protection Group Ltd		Page 4
Warrington Business Park Long Lane Warrington WA2 8TX	Openshaw Proposed Pitch	
Date 18/03/2022 15:43 File Cascade 2.CASX	Designed by JHR Checked by RG	
XP Solutions	Source Control 2020.1.3	

Cascade Rainfall Details for Proposed 3G Pitch.SRCX

Rainfall Model	FSR	Winter Storms	Yes
Return Period (years)	100	Cv (Summer)	0.750
Region	England and Wales	Cv (Winter)	0.840
M5-60 (mm)	18.000	Shortest Storm (mins)	15
Ratio R	0.360	Longest Storm (mins)	10080
Summer Storms	Yes	Climate Change %	+40

Time Area Diagram

Total Area (ha) 0.800

Time (mins)	Area	Time (mins)	Area	Time (mins)	Area	Time (mins)	Area
From: To: (ha)		From: To: (ha)		From: To: (ha)		From: To: (ha)	
0 4 0.200		4 8 0.200		8 12 0.200		12 16 0.200	

