



LED BULB-LED A70 ,15W E27,B22 Cap



Product Overview

Main voltage led lamps operate direct from the mains, without the need for a transformer, and it can't be dimmed: making them quick and easy to install, simple to operate and lowering installation and user costs.

Features

- More eco-valued.
- Excellent color rendering and consistency
- Reliable construction

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in application where voltage is unable
- This is a plastic product, handle with care

Specifications – E27, B22 Cap

SKU	S10994 S10995	S10996 S10997	S12507 S12506
Lamp	Cap E27 B22	Cap E27 B22	Cap E27 B22
Nominal Power (W)	15W	15W	15W
Voltage	220-240Vac 50Hz	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Luminous Flux (lm)	1530	1560	1560
CCT (K)	3000K warm White	6500K Daylight	4000K Cool White
Nominal Lifetime (h)	10000	10000	10000
Dimmable	NO	NO	NO
Switching Cycles	8000	8000	8000
Warm-up time to 60% (S)	instant	instant	instant
Length (mm)	132	132	132
Diameter (mm)	70	70	70
Mercury (mg)	0	0	0
Clean-up instructions	See website	See website	See website
Retrofit Yes			
Equivalent Wattage (W)	100	100	100
Rated Power (W)	15	15	15
Rated Luminous Flux (lm)	1530	1560	1560
Rated Lifetime (h)	10000	10000	10000
Power Factor	0.5	0.5	0.5
Rated Peak Candelas (cd)			
Lumen Maintenance Factor at			
Nominal Lifetime	10000	10000	10000
CRI	>80	>80	>80
Start Time (s)	instant	instant	instant
Ambient Temperature Range (°C)	-20 to 40	-20 to 40	-20 to 40

Energy Label – E27, B22Cap


Energy Class	A+	A+	A+
Energy Consumption (kWh/1000h)	15.00	15.00	15.00

* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference

Product Markings – E27, B22 Cap

Voltage	220-240Vac 50Hz	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Power (W)	15	15	15
Current (mA)			
CE Mark	Yes	Yes	Yes
WEEE Mark	Yes	Yes	Yes
Batch Code	Yes	Yes	Yes

Dimensions

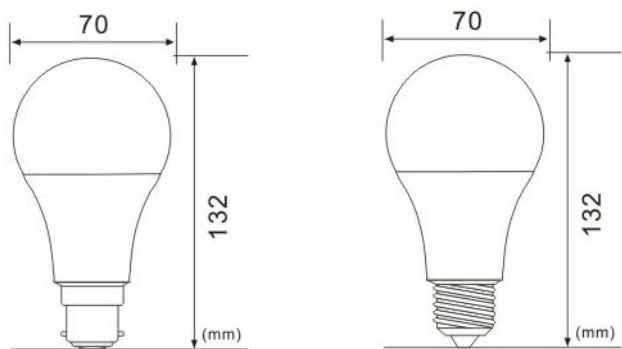

Photometric Information

3000K/6500K

