


Copyright: All rights reserved.
This drawing must not be reproduced without permission.
This drawing must not be scaled. Dimensions are in
millimetres unless specified.

1. Main Roof - existing standing seam mill finish aluminium, 600mm centres.
2. New vertical cladding over existing finishes, 1000mm wide module - metallic grey RAL 9007, or similar.
3. Existing anodised aluminium louvers.
4. Existing vertical plank, 300mm wide, coated steel cladding - Silver RAL 9006, or similar.
5. New curtain walling to replace existing - Colour TBC. Solar control glazing - Colour Clear.
6. Existing coated composite steel panel horizontal cladding - Silver RAL 9006, or similar.
7. Refer to detailed proposals for junction details with existing cladding.
8. Existing facing brickwork.
9. Existing fair-faced concrete buttresses.
10. Existing painted steel doors - Colour varies.
11. Existing PPC metal windows - Pigeon Blue RAL 5014, or similar.
12. Existing PPC metal doors - RAL 7016, or similar.
13. Existing doors to British Cycling entrance.
14. Composite metal cladding (Colour: RAL 7024).
15. LPS 1175 S2 rated steel security doors. Colour: RAL 7024.
16. Frameless vertical screening system with PPC profiled aluminium blades, dark grey (Colour: RAL 7024) with accents of red (RAL 9020), white (RAL 9010) and blue (RAL 5005) as architect's design. Final configuration of coloured blades TBC. Supported on aluminium framing system to specialist design. Modules to be fixed to give a continuous appearance across the facade.
17. Continuous PPC aluminium flashings at base and head of system.
18. 600mm high PPC steel mesh band at base of wall (Colour: RAL - 7024).
19. New acoustic rated curtain walling to GBCT Office (Colour TBC). Solar control glazing - Colour Clear.
20. New acoustic rated windows (Colour TBC) to replace existing PPC metal windows.
21. PPC galvanised angle to outer face of concrete upstand (Colour: RAL - 7024).

L01 Indicates new louvre grille to services engineer specification. PPC RAL 7016

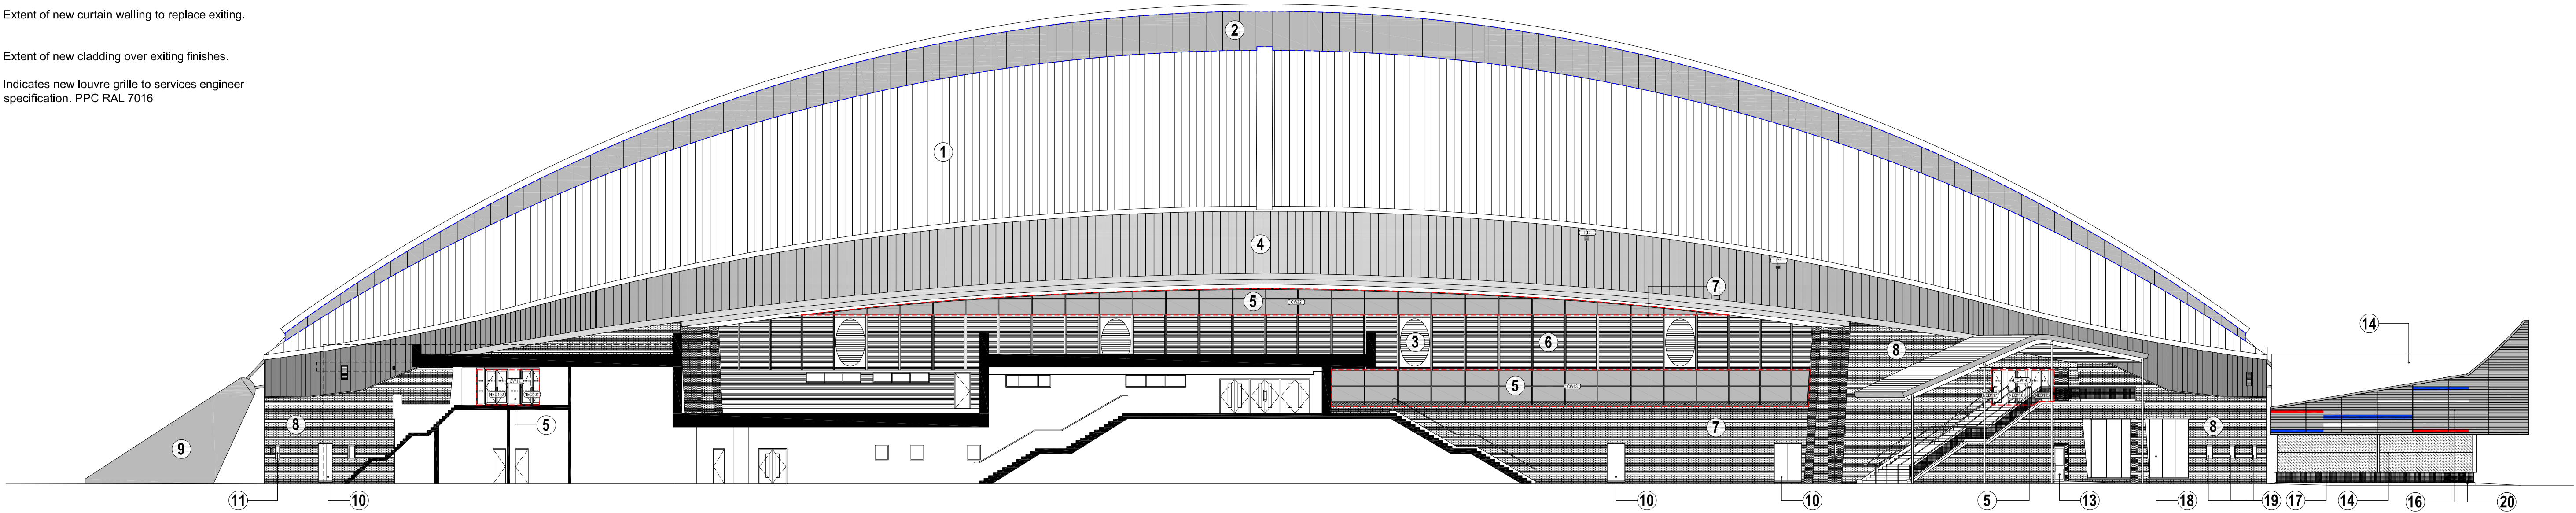

C3	27.04.2022	Plant room elevators/vertical flushing positions updated, PPC angle note added.	AM	EM
C2	22.04.2022	Comments for plant section visited to solid panels and doors.	AM	EM
C1	22.04.2021	Stage 5 issue	MJ	EM
P5	11.08.2021	Plant design revised.	AM	EM
P4	24.06.2021	Louvre grilles added	BP	EM
P3	14.04.2021	Plant envelope updated, vent grilles added	MJ	EM
P2	25.11.2020	Plant design revised, Door & curtain walling references added.	MJ	EM
P1	05.10.2020	STAGE 5 ISSUE	MJ	EM
REV	DATE	REVISION NOTE	BY	CHECK