

GTech Surveys Limited

Television and Radio Reception Impact Assessment

Boddingtons, Manchester

CHANGE HISTORY

Issue	Date	Details of Changes
0.0	04/10/2021	Working draft
0.1	20/10/2021	First draft issue
1.0	02/12/2021	First issue - site plan updated and minor editing
Author: G Phillips		Reviewer: O Lloyd

Contents	Page
GTech Surveys Limited	
Executive Summary	
1 - Introduction	4
2 - The Mechanisms of Interference to Television and Radio Broadcast Services	7
3 - Available Television and Radio Broadcast Services	12
4 - Survey Methodology & Description of Baseline	14
5 - Predicted Impacts and Effects	16
6 - Identifying Television Interference and Mitigation Measures	19
7 - Conclusions	21
Appendix	22
Television Transmission Frequencies	
VHF (FM) Radio Transmission Frequencies	
Signal Measurements	
An Overview of Signal Measurements	
Survey Equipment	
Calculation of Received Field Strength	
References	
Mapping Data	
TV Interference Questionnaire	
Planning Policies - National Planning Policies	
Planning Policies - Regional and Local Planning Policies and Guidance	

GTech Surveys Limited

GTech Surveys Limited is a Midlands based broadcast and telecommunications consultancy conducting projects throughout the entire UK. We undertake mobile phone network, television and radio reception surveys (pre- and post-construction signal surveys), conduct broadcast interference and reception investigations, and support telecommunications planning work for wind energy developers, construction companies, architects, broadcasters and Local Planning Authorities.

In addition to radio interference modelling services and television reception surveys, we produce EIA and ES Telecommunications Chapters (also known as an 'Electronic Interference Chapter'); satisfying the requirements of Part 5, Regulation 18 (Parts 5a and 5b) of The Town and Country Planning EIA Regulations 2017. We peer review ES and EIA work, liaising with telecommunications providers (Arqiva, BT etc.) and advise developers with respect to associated Section 106 (Town and Country Planning Act 1990) and Section 75 (Town and Country Planning (Scotland) Act 1997) agreements.

GTech Surveys Limited is a consultant member of the Trade Association for Content Delivery - (Confederation of Aerial Industries Ltd - CAI) and the RDI - the digital sector's professional body and trade organisation. We are listed on Constructionline and verified as a Safety Schemes in Procurement (SSIP) member by Safety Management Advisory Services (SMAS), making us compliant with the industry standard PAS 91:2013 + A1:2017.

Professional broadcast trained project engineers deliver, and supply QBE insured technical products to support planning applications, discharge planning conditions (including S106 Agreements) and for due diligence. For more information about GTech Surveys Limited please visit our website - www.gtechsurveys.com



GTech Surveys Ltd.
Accountancy House,
4 Priory Road,
Kenilworth,
Warwickshire,
CV8 1LL.

T: +44(0) 1926 744771



Executive Summary

A baseline (pre-construction) signal survey and reception impact assessment has been undertaken to determine the potential effects on the local reception of television and radio broadcast services from the proposed Boddingtons development in Manchester. Under Manchester City Council (MCC) planning guidance, any development over four storeys requires a TV and radio reception impact assessment. Consequently, this report has been produced to support the planning application submission and to provide the baseline reception data to assist with any further studies. Accordingly, impacts to the reception of VHF (FM) radio, digital terrestrial television (also known as Freeview) and digital satellite television services (such as Freesat and Sky), have been assessed. Impacts to the reception of analogue television services have not been assessed in this study because analogue terrestrial television services were switched off in Manchester (Granada TV region) during 2009 and throughout the rest of the UK by 2012.

Whilst widespread interference to digital terrestrial television (DTT - Freeview) reception is not expected, the Proposed Development may cause reception degradation to properties immediately southeast of the Site (up to 150m), including LTE Group's Manchester city centre campus. In this area, the quality of received signals could be degraded due to the massing of the Proposed Development. Simple and cost-effective antenna betterment or relocation should restore the optimal reception of all DTT services if any interference is experienced and found attributable to the Proposed Development. This is a standard and easy to adopt mitigation solution.

The Proposed Development may cause disruption to the reception of digital satellite television services in highly localised areas to the immediate northwest of the Site, up to 192m from base of the tallest proposed building. In this area (including the Travelodge Manchester Central Arena building) the proposed building could obscure line-of-sight views to the serving satellites, resulting in interference to received signals. If interference does occur, the repositioning of satellite dishes to new locations without an obscured line-of-sight view to the serving satellites is likely to restore all services.

The Proposed Development is unlikely to adversely impact the reception of VHF(FM) radio broadcasts due to the existing good coverage in the survey area and the technology used to encode and decode radio signals.

Overall, the Proposed Development may cause minor short-term interference to digital terrestrial and satellite television reception in localised areas around the Site, but mitigation solutions exist that will quickly restore the reception of affected television services, leaving no long-term adverse effects for any viewer. This report provides the existing level and quality of radio and television signal reception in the survey area and can be used to support the planning application submission.

1 - Introduction

This report outlines the findings of a reception impact assessment and pre-construction signal reception survey to determine the viewing preference of residents located around the proposed Boddingtons development and identifies what effects the Proposed Development may have on the reception of television and radio broadcast services.

This report has been prepared by GTech Surveys Limited for the applicant. Figure 1 shows the location of the Site.

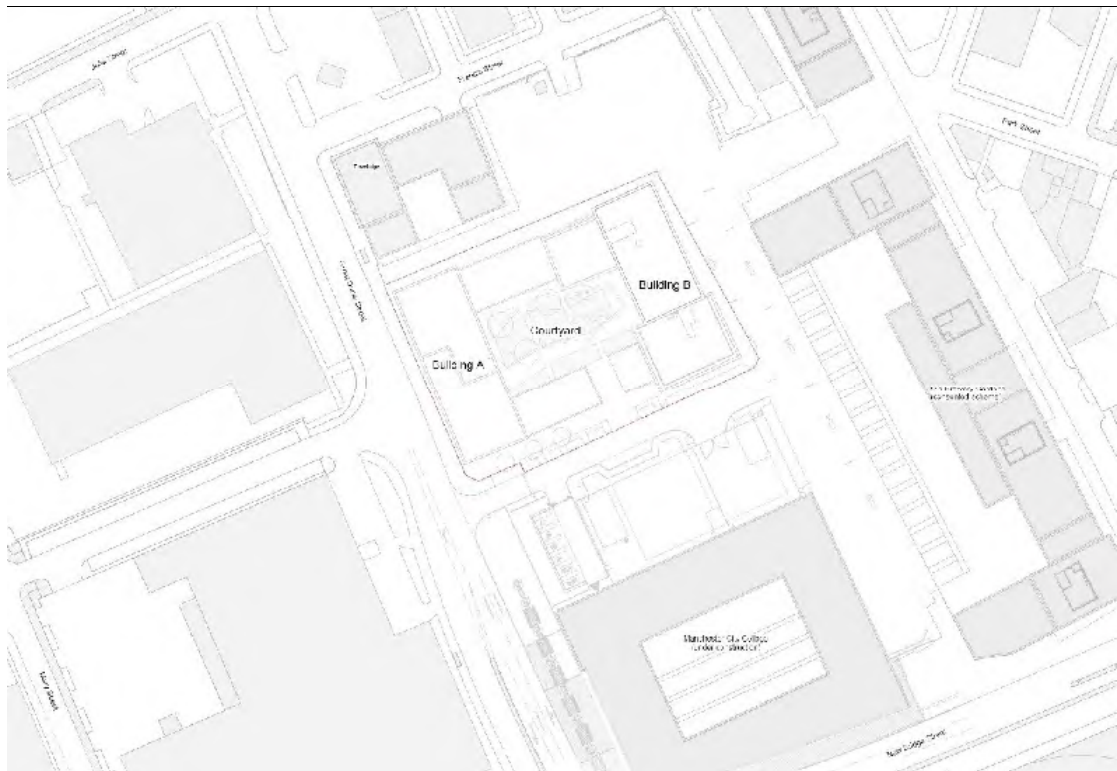


Figure 1 - The Location of the Site

Under Manchester City Council (MCC) planning guidance, any development over four storeys requires a TV and radio reception impact assessment. Further guidance can be found in this document; “Full, Outline, Reserved Matters & Variation/Removal of Conditions Planning Applications - Is Your Application Valid?”, September 2018 (revised January 2020), MCC. The requirement states;

Television Reception

MCC planning guidance, any development over four storeys requires a TV reception impact assessment.

Information on TV and radio reception and interference. Please provide a report on the possible interference created by the proposed development on TV and radio reception within the area. (Core Strategy Policy EN2)

Additionally, national requirements under The National Planning Policy Framework (NPPF), July 2021 (Ministry of Housing, Communities & Local Government) states at paragraph 116, that local planning authorities should ensure that;

b) they have considered the possibility of the construction of new buildings or other structures interfering with broadcast and electronic communications services

A desktop study was first undertaken, based on broadcast transmission information, plans of the Proposed Development and maps of the area. The relevant TV and radio signal survey area for the Proposed Development was identified and a site visit was then subsequently conducted to establish the baseline television reception conditions. Modelling techniques and field assessments of viewers’ choice of television and radio transmitter were then used to predict the potential effects upon television and radio broadcast reception in the area. The impacts from the Proposed Development are consequently analysed, and together with various mitigation options, conclusions are drawn on the overall effects of the Proposed Development on television and radio broadcast service reception for local residents.

This study was undertaken during October 2021 to investigate whether the Proposed Development could cause interference to local television and radio broadcast reception. The effects on VHF (FM) radio, digital terrestrial television and digital satellite television service reception are discussed. The report also details the baseline reception conditions for future reference.

This report follows the following structure:

Chapter 1 introduces the work

Chapter 2 discusses the different forms of structure generated television and radio interference and how these can impact the reception of different television and radio broadcast platforms

Chapter 3 describes the available television and radio services in the survey area

Chapter 4 describes the pre-construction television and radio reception conditions around the Site

Chapter 5 describes the predicted impacts of the Proposed Development upon television and radio broadcast reception before any mitigation measures are applied

Chapter 6 describes any suitable mitigation measures for any affected TV viewer or radio listener and a methodology to report and identify the cause of any interference

Chapter 7 presents the conclusion

2 - The Mechanisms of Interference to Television and Radio Broadcast Services

Terrestrial Television Services

Any structure will produce two zones of potential disruption to television reception. One zone is where the development creates a 'shadow' (affects all television broadcast platforms) and the other where it gives rise to a 'reflection'. At the frequencies used for broadcasting, the processes of creating a 'shadow' or a 'reflection' are somewhat more complicated than with visible light but thinking of the problem in these terms is still a helpful way of approaching the matter.

Signal 'Shadowing' Effects

In the area behind the structure, the television transmitter is effectively screened from the viewer and the strength of the signal is reduced - Figures 2 and 3.

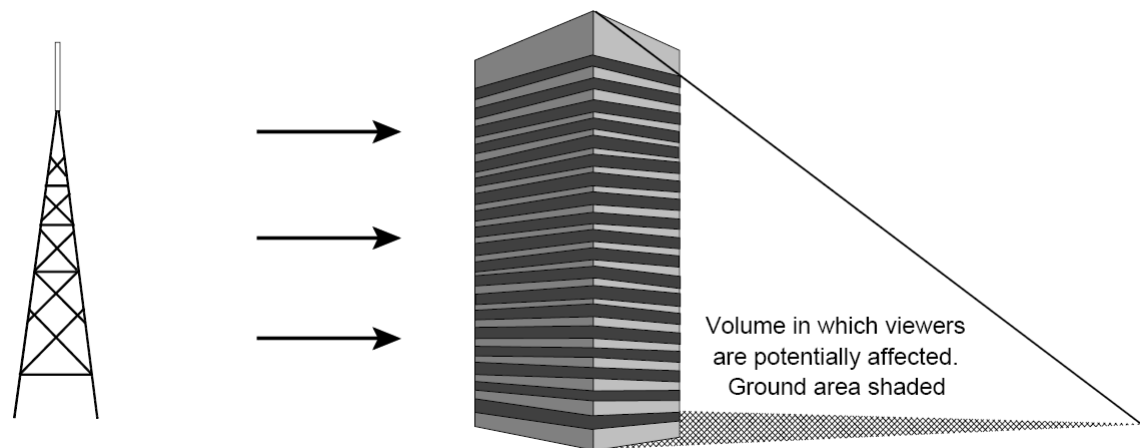


Figure 2 - Affected area in the 'shadow' zone behind the structure

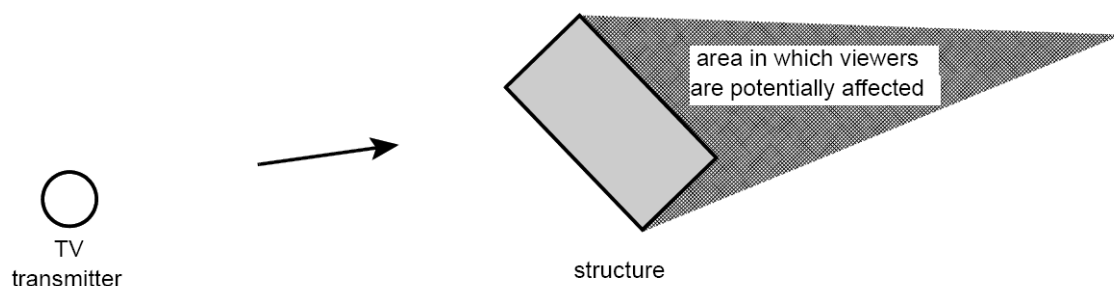


Figure 3 - Plan view of the 'shadow' zone

Television signals do not create such a 'hard' shadow as visible light, and for the purposes of explanation, a 'shadow' zone must be considered which is divided into three sub-zones.

i. Within a few tens of metres from a solid structure, over the region where optical view of the transmitter is lost, the reduction in signal strength is critically dependent on the specific design and composition of the structure. For most brick and concrete buildings, the reduction can be severe and, in some cases, almost total if existing reception conditions are poor.

ii. Further away from the structure (e.g. beyond 25 to 50 metres, but this varies depending on its size) the limit of the 'shadow' zone and signal reduction are determined by diffraction at the edges of the structure and reflection off surrounding structures. The simple condition of whether or not a location has an optical view of the transmitter is not enough to classify the potential interference zone adequately. In general, the effect is that the signal appears to bend around the sides of the structure; the shadow zone reduces in size and the signal strength is reduced by much less than simple ray optics would suggest.

iii. Even further away from the structure (e.g. 250m) complex multiple reflections and diffraction, caused by structures in the locality, may result in the 'shadow' zone becoming almost non-existent, against interfering signals that arrive on significantly different bearings. This can result in an increase in the ratio of wanted to unwanted signal as presented to the television receiver.

Signal 'Reflection' Effects

The second zone of potential interference is produced by 'reflection' or 'scattering' of the incident signal, see Figure 4.

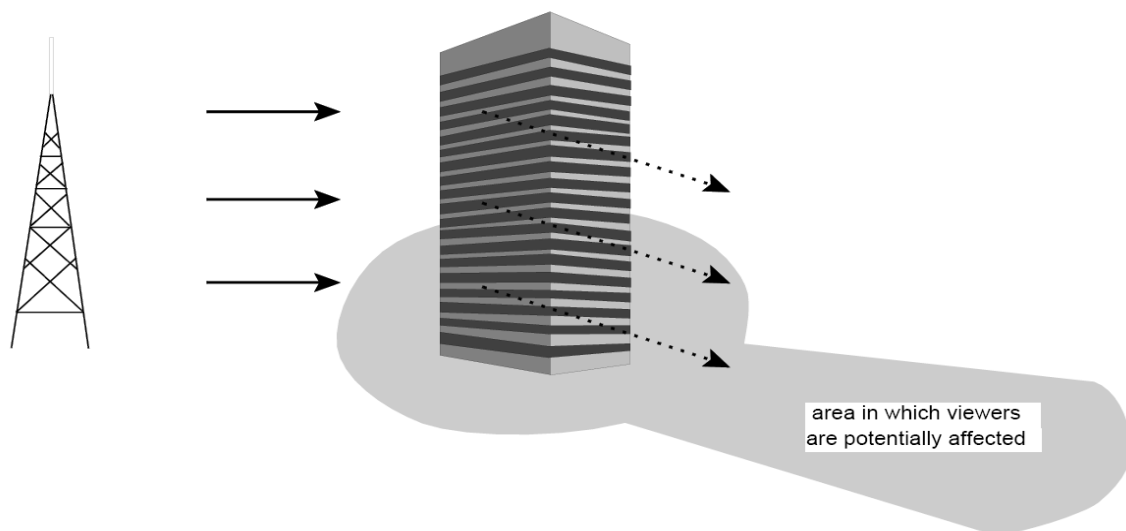


Figure 4 - Affected areas in the 'reflected' zone of the structure

Consider Figure 5, the direct signal travels a distance P1 to the viewer, whilst the signal reflected from the structure travels slightly further, distance (P2 + P3). Although travelling at the speed of light, the different path lengths can mean that one signal arrives with a significant delay relative to the other. This results in a degradation in signal quality.

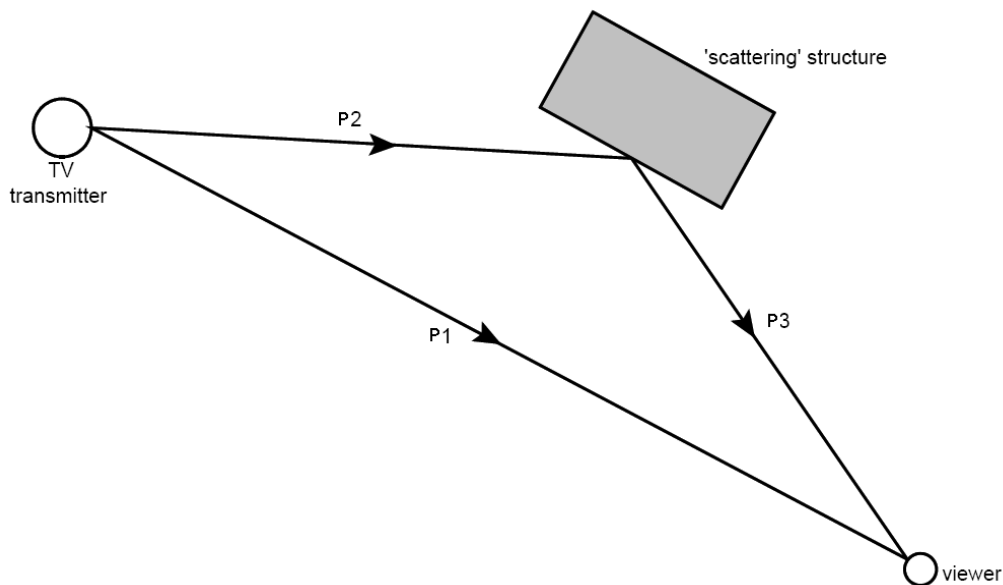


Figure 5 - Direct and Indirect Signal Paths

To avoid interference, it is necessary to ensure that the ratio of wanted signal along the direct path (P1) to the unwanted signal along indirect paths (P2+P3) is sufficiently high. Domestic TV receiving antennas generally have a significant directional response to incoming signals, which means that the antenna may discriminate against interfering signals that arrive on significantly different bearings. This can result in an increase in the ratio of wanted to unwanted signal, as presented to the television receiver.

Digital Terrestrial Television (DTT) - Freeview

The digital television broadcast platform offers many advantages over older analogue broadcast technologies. Due to the way picture signals are encoded and broadcast, digital television offers a much more resilient platform against interference. The construction of digital signals ensures that they are much more impervious to the effects of interference from indirect secondary reflections, which consequently ensures good quality and coherent data stream integrity at the receiver, resulting in an interference free picture. Disruption to DTT services is normally caused by a poor-quality receiving antenna system or locally generated wideband electrical noise. Signal blocking caused by buildings can also degrade received signal quality.

Digital Satellite Television Services - Freesat & Sky

Digital satellite television services are provided by geo-stationary earth orbiting satellites positioned above the equator. To ensure good reception of digital satellite television services, satellite receive antennas (satellite dishes) are normally positioned away from trees and other clutter and are orientated to face the southern (south-southeast) skies.

Disruption to digital satellite television services is normally caused by an obstruction on the line of sight from the satellite to the receive antenna e.g. a tall building or tall trees. Adverse weather can also influence reception. In the United Kingdom, Freesat and Sky services come from the 28.2 degrees east ASTRA satellite cluster.

Figure 6 below shows typical clearance distances and obstruction heights for interference free satellite television reception.

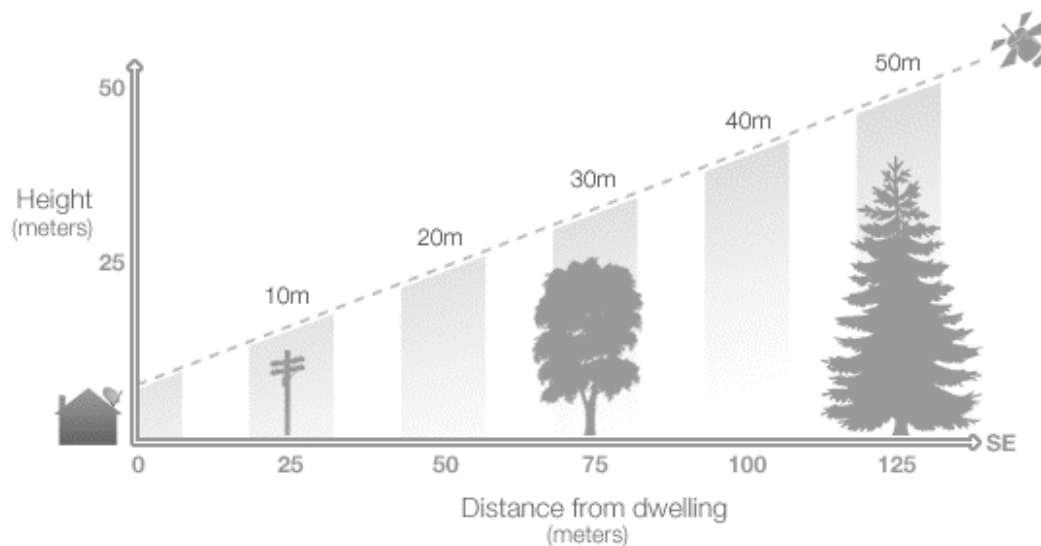


Figure 6 - Typical Clearance Distances and Obstruction Heights for Interference Free Satellite Television Reception

VHF (FM) Radio

VHF (FM) radio services are broadcast from similar structures as terrestrial television services. Many things can cause radio interference, however simple remedies exist that can quickly reduce the effects. Most reception problems on FM radio are caused either by a weak signal or by some kind of interference.

Radio transmission signals will reflect into 'shadow' areas and also reflect from structures to cause 'multi-path' effects. The effect of multiple signals is to create zones of signal cancellation and signal enhancement. This is often demonstrated by the need to carefully position portable radio receivers for good reception or the fluctuation in signal quality whilst listening to VHF (FM) broadcasts in a vehicle. Due to the wavelength of the VHF (FM) signal (at 100 MHz, the middle of the VHF (FM) band, the wavelength is 3 metres), zones of interference can quickly and easily physically move around, as the interference is generated from the sum interaction of all incoming signals. Consequently, prediction of VHF (FM) interference is not practically possible due to the complex interaction of reflected signals with wanted signals, the design of radio receivers and radio signal propagation characteristics.

Buildings rarely cause radio interference but there is little that can be done during the design stage to reduce any adverse effects. Due to the lower frequencies in use for radio transmission (with respect to television services) and the methods by which the radio signals are encoded, it is very unlikely that a new structure in an already cluttered urban environment will disrupt the reception of radio services.

3 - Available Television and Radio Broadcast Services

Terrestrial Television Services

The area around the Site is no longer served by analogue television transmissions due to the completed Digital Television Switchover. All analogue services were switched off in the Granada television region during 2009.

Digital Terrestrial Television (DTT) - Freeview

The survey area is served by DTT services (Granada TV region) from the Winter Hill transmitter (grid reference SD 66053 14463), on a bearing of 310° (with respect to true north) and 23km away. The Winter Hill transmitter is shown with respect to the Site in Figure 7. Technical transmission information for each digital television service broadcast from the Winter Hill transmitter site is detailed in Table A, found in the Appendix - *Television Transmission Frequencies*.

Up to date technical information regarding the Granada TV region and Winter Hill transmitter group can be found on the Digital UK website - <http://www.digitaluk.co.uk>

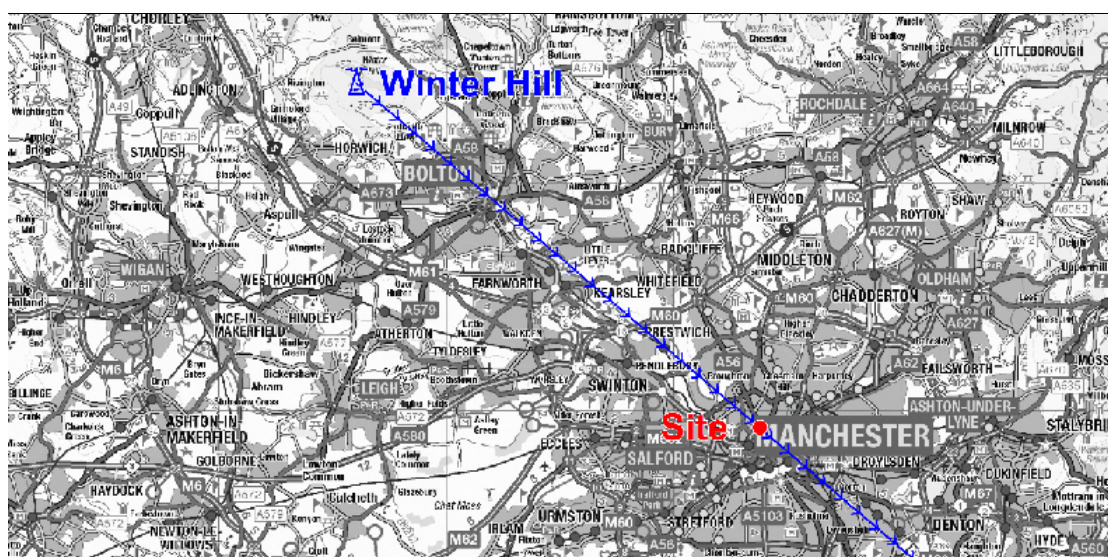


Figure 7 - The Locations of the Winter Hill Transmitter, the Site and the direction of the incoming DTT signals at the Site (indicated by the blue arrowed line)

Non-Terrestrial Television Services (Digital Satellite Television)

For the reception of the 28.2 degrees east ASTRA satellite cluster (Freesat and Sky services), dish elevations of 22.8 degrees are required at this latitude. Optimal receive dish azimuths are 143.8 degrees with respect to true north (approximately southeast).

VHF (FM) Radio

The areas around the Site are served by VHF (FM) radio services of

BBC Radio 1, 2, 3, and 4 from the Holme Moss transmitter (NGR SE 09550 04050)

Technical transmission information for each radio service broadcast from the Holme Moss transmitter are detailed in Table B in the Appendix - *VHF (FM) Radio Transmission Frequencies*.

4 - Survey Methodology & Description of Baseline

Due to the complex nature of television interference in cluttered urban environments, field investigations must be undertaken in the general area around a site to fully evaluate any potential effects. In this study, field measurements were undertaken up to two kilometres away from the Site, however, the study mainly focused around the Site and areas to the immediate northwest and southeast. Additionally, investigations are carried out in all areas where predicted (modelled) interference may occur. These are identified in Figure 8, and the measurements are detailed in Tables C and D, found in the Appendix - *Signal Measurements*. The following data was recorded:

- Field strength and technical signal measurements of DTT transmissions from the main serving transmitter
- Viewing preference (choice of television transmitter) of residents in all areas visited
- Field strengths of VHF (FM) radio transmissions from the serving transmitter

All television measurements were carried out using a UHF log-periodic receive antenna, mounted on GTech Surveys's broadcast survey vehicle, at a receive height of 10 metres above ground level (AGL), industry standard height for such work. VHF (FM) radio field strength measurements were taken with a resonant half wavelength folded dipole antenna at 2 metres AGL, industry standard height for such work. During the survey, no assessment was made of reception conditions within viewers' homes. Equipment details are detailed in the Appendix - *Survey Equipment*.

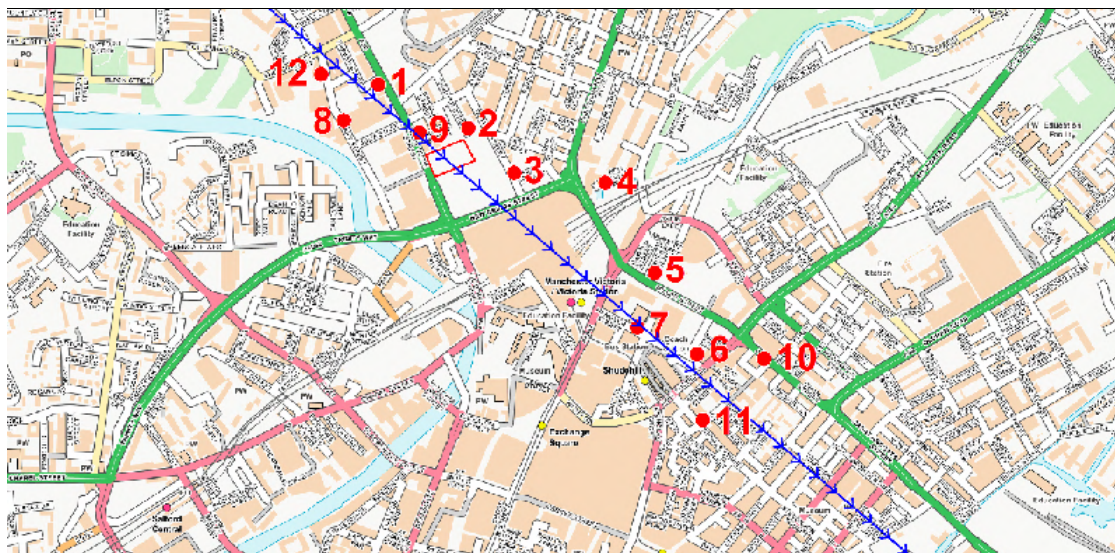


Figure 8 - Surveyed Locations. The blue arrows indicate the direction of the incoming DTT signals from Winter Hill transmitter. The Site is delineated in red

Survey Results and Observations

In general, building use around the Site is mainly for residential and commercial use. There are a number of tall and wide buildings located around the Site and construction work is being undertaken (for LTE Group's Manchester city centre campus) at a plot next to the Site. When visible during the survey, all signal receive antenna systems are mounted on rooftops, ensuring optimal reception conditions. Terrestrial television antennas are directed towards the Winter Hill transmitter.

Digital Terrestrial Television - Freeview

DTT services were available at all surveyed locations from the Winter Hill transmitter. At all locations, received signal levels were in excess of recommended minimum amounts and the technical quality of received signals was found to be good¹. DTT services currently provide very good coverage and service throughout the study area.

Digital Satellite Television - Freesat & Sky

Few satellite dishes were noted on the sides of buildings during the survey. Additional dishes may be mounted on rooftops and at the rear of properties; however, these would not be visible from any publicly accessible area. Such buildings would include the Travelodge Manchester Central Arena building. No existing interference has been identified for any satellite television platform.

VHF (FM) Radio

VHF (FM) radio reception conditions were deemed to be good² throughout the study area. In-car reception was deemed to be good at all locations. This is due to the proximity of the Holme Moss high-power radio transmitter with respect to the Site.

1 - Signal levels as specified by the *Code of Practice Confederation of Aerial Industries (CAI) COP 01 - Installation of Terrestrial and Satellite TV Reception Systems (MDU & Commercial)*, CAI, January 2021

Additional technical information regarding the Freeview signal can be found in the Appendix - *An Overview of Signal Measurements*

2 - Minimum Recommended Field Strengths for Acceptable Levels of VHF (FM) Radio Service

Monophonic audio - 40 dBµV/m
Stereophonic audio (excellent quality) - 54 dBµV/m

Source - https://www.ofcom.org.uk/data/assets/pdf_file/0013/54310/annex-f.pdf

5 - Predicted Impacts and Effects

Methodology

To assess the effects of the Proposed Development upon television and radio broadcast service reception, the structures were considered to create interference to services in the immediate areas around the Site, in signal reflection areas and in the signal shadow zones. These methods, used in conjunction with broadcast transmission information, development plans, maps of the study area and modelling techniques, contribute towards predicting the potential effects upon television and radio broadcast reception in the study area.

The field survey then investigated the areas identified as being at risk of interference and assessed all available services and the transmitter viewing preferences of residents in order to determine if the computed risk is practically valid. The collected data was finally used to determine what actual risks exist and what viable solutions are available to minimise any adverse effects. The predicted effects on television and radio broadcast reception are discussed below and summarised in Table 1.

Digital Terrestrial Television - Freeview

Digital television services are much less affected by signal reflections³. Due to the existing robust coverage in the survey area and lack of viewers in any theoretical signal shadow areas, the Proposed Development is not expected to cause widespread interference upon the reception of Freeview television services. However, due to the massing of the Proposed Development, reception may be impaired in areas to the immediate southeast of the site, up to 150m from the base of the tallest proposed structure. **Whilst there are no existing antennas in use this location, new antenna systems may be installed on the buildings currently under construction. Consequently, interference could occur in the future.** Should interference occur, antenna betterment or relocation may be required.

3 - Whilst less prone to signal reflection generated interference, modelling parameters assume that all installed antenna systems are mounted at least 10m AGL and installed to a modern standard, with all components meeting CAI quality standards. Antennas mounted at lower heights and substandard installations will be more prone to the effects of interference from external sources.

Digital Satellite Television - Freesat and Sky

Tall structures, trees and buildings can disrupt digital satellite television reception by causing obstructions on the line of sight to the signal receive dish from the serving satellite. This is discussed further in Chapter 2.

Using the mathematical tangent function and based on the maximum height of the Proposed Development, the angle and orientation of the incoming satellite signals, theoretical signal shadow zones for the 28.2E ASTRA satellite cluster are up to 192m from the base of the tallest proposed building. This area extends in a northwesterly direction (323.5 degrees with respect to true north) from the building's base. As there are likely to be satellite dishes located in this area (especially on rooftops such as the Travelodge Manchester Central Arena building), interference to satellite television reception could occur.

VHF (FM) Radio

Modelling VHF (FM) radio interference in a cluttered urban environment is not possible due to the number of constantly changing variables. VHF(FM) broadcast radio reception is robust throughout this part of the country; evident by the survey results and signal availability with a typical car radio. Whilst any structure will change local signal propagation characteristics, due to the technical methods involved with encoding and receiving the transmissions, reception remains possible. Overall, the Proposed Development is not expected to impact the reception of VHF (FM) radio broadcasts.

Broadcast platform	Area(s) of predicted interference	Risk of interference & reasoning	Mitigation
DTT (Freeview)	150m due southeast from the Site	Possible because antennas are likely to be located in this area in the future	Antenna betterment or antenna movement
Digital Satellite TV (Freesat & Sky)	192m northwest from the base of the tallest proposed building	Possible because there could be dishes located in this area	Required if dishes are in use in this area and interference occurs
VHF(FM) Radio	Non-identified	No because coverage is robust	N/A

Table 1 - Summary of Predicted Interference

Predicted Effects - Conclusions

No widespread interference to the reception of digital terrestrial television (Freeview) services is expected to arise from the Proposed Development. However, reception conditions may be impaired in areas to the southeast of the Site, up to 150m from the application boundary. Whilst there are currently no antennas located in this area, new antenna installations may be planned for the adjacent LTE Group's Manchester city centre campus. Should interference occur in this location, antenna betterment or relocating antennas to new locations where views to the Winter Hill transmitter become restored would enhance reception. If this is required, it is advised that a registered antenna installer undertakes all required work. This is detailed further in Chapter 6.

The Proposed Development may cause disruption to the reception of digital satellite television services within 192m to the immediate northwest of the Site. Should satellite dishes be located in this area (especially relating to the Travelodge Manchester Central Arena building), repositioning satellite dishes to new locations where views of the south-eastern skies are no longer obscured would restore services for any affected service. If this is required, it is advised that a registered antenna installer undertakes all required work. This is detailed further in Chapter 6. Additionally, the use of DTT receiving equipment would also offer viewers alternative sources of broadcasts, however this is unlikely to be required due to the ease of relocating satellite dishes to better locations.

The Proposed Development is not expected to affect VHF(FM) radio reception.

6 - Identifying Television Interference and Mitigation Measures

Identifying interference

The identification of television interference is a straightforward and simple undertaking for a qualified television / signal engineer with suitable and calibrated signal receiving and testing equipment. As discussed in Chapter 2, a building or obstruction between the transmitter or satellite and receiving antenna (i.e. a domestic Sky / Freeview dish or TV antenna, mounted on a rooftop or the side of the building), can cause a reduction in both the received signal strength and signal quality. These reductions can result in the received transmissions becoming more prone to other external interference sources and in very severe cases, this reduction can result in a total loss of service for the viewer.

For a qualified television / signal engineer to verify that a building has caused interference, it is advised that initially a short questionnaire (Appendix - *Television Interference Questionnaire*) is completed by the complainant. Upon validation of the case (e.g. in this situation it would not be a valid complaint if interference was occurring to cabled television services), and the engineer has visually confirmed that the satellite dish / antenna on the property in question point directly 'through' the development, signal measurements with the appropriate equipment taken at the cable termination point should indicate a reduction in both level and quality. Naturally, a poor quality or faulty antenna installation would also indicate poor signal levels and qualities, and if that was the case and the engineer deems the installation 'not fit for purpose', then no further developer remediation is required. However, if the cause of interference has been identified as a result of the development, the mitigation solution as detailed below, should be enough to restore the good reception of television services.

Mitigation Measures

For any affected Freeview viewers within 150m to the immediate southeast of the Site, the betterment of antennas is likely to restore services. Betterment of antenna systems could include any of the following:

- Replacement of components not fit for purpose (damaged, water ingress in cables / antennas, electrically faulty, old brown type coaxial etc.)
- Replacement or installation of a mast head amplifier and new antenna
- Replacement of old coax cable to better signal throughput and to reduce unwanted pickup
- Installation of a higher gain antenna

- Good earthing on antenna systems and associated components to help reduce unwanted electrical system noise and unwanted electrical pickup
- Installation of a higher antenna (above ground level) in a location as far away from the Site as possible i.e. on another chimney stack etc.

These are common and simple mitigation solutions for similar situations where local television reception conditions have been affected by adjacent construction work. A registered installer should be able to advise on the most effective mitigation measures once the existing installed antenna system has been inspected and construction-generated interference has been identified.

For any affected digital satellite television user to the north-northwest of the Site (up to 192m from base of the tallest proposed building), relocating satellite dishes to new locations where views to the southeast horizon are no longer obscured would restore the reception of digital satellite television services. Affected digital satellite television viewers could also use DTT reception equipment to restore services.

It is recommended that all antenna work (dish moving, relocating etc.) is undertaken by a registered installer (CAI accredited) and any system components used must be CAI benchmarked. More information regarding the Confederation of Aerial Industries & Registered Digital Installers can be found on the following websites -

The CAI's Website - <http://www.cai.org.uk/index.php>

The CAI's benchmarking scheme ensures that the cables and antennas have passed minimum requirements for the use of DTT and digital satellite television reception. The use on non-benchmarked products in an antenna system would degrade overall performance and effectiveness of the system, increasing the risk from interference. More information on CAI benchmarked products can be found on the CAI's website -

<https://www.cai.org.uk/index.php/services/product-certification-scheme>

7 - Conclusions

A desktop-based study and baseline reception survey have been performed to assess the possible effects and impacts on the reception of television and radio broadcast services from the proposed Boddingtons development in Manchester. The study has focused on the reception of VHF (FM) radio and the two television broadcast platforms that could possibly be impacted by the Proposed Development - digital terrestrial television and digital satellite television services.

Digital Terrestrial Television (DTT) - Freeview

Whilst widespread interference to Freeview reception is not expected, the Proposed Development may cause reception degradation to properties immediately southeast of the Site (up to 150m), including LTE Group's Manchester city centre campus. In this area, the quality of received signals could be degraded due to the massing of the Proposed Development. Simple and cost-effective antenna betterment or relocation should restore the optimal reception of all services if any interference is experienced. This is a standard and easy to adopt mitigation solution. If any antenna work is required, it is advised that a registered antenna installer undertakes all required work.

Digital Satellite Television - Freesat & Sky

The Proposed Development may cause disruption to the reception of digital satellite television services in highly localised areas to the immediate northwest of the Site, up to 192m from base of the tallest proposed building. In this area (including the Travelodge Manchester Central Arena building) the proposed structures could obscure line-of-sight views of the southeastern skies, resulting in interference to received signals. If interference does occur, the repositioning of satellite dishes to new locations without an obscured line-of-sight view to the serving satellites would restore all services. If this is not possible (which is an unlikely outcome) the use of DTT receiving equipment would also offer any affected viewer an alternative source of digital television broadcasts.

VHF(FM) Radio

Due to the existing good coverage and robust technical nature of the broadcast radio network with respect to building-generated signal interference, the Proposed Development is not expected to affect the reception of VHF(FM) radio services.

Overall, the Proposed Development may cause minor short-term interference to digital terrestrial and satellite television reception in highly localised areas around the Site, but mitigation solutions exist that will quickly restore the reception of affected television services, leaving no long-term adverse effects for any viewer. This report provides the existing level and quality of radio and television signal reception in the survey area and can be used to support the planning application submission.

APPENDIX

Television Transmission Frequencies

VHF (FM) Radio Transmission Frequencies

Signal Measurements

An Overview of Signal Measurements

Survey Equipment

Calculation of Received Field Strength

References

Mapping Data

TV Interference Questionnaire

Planning Policies - National Planning Policies

Planning Policies - Regional and Local Planning Policies and Guidance

Television Transmission Frequencies

Digital TV Multiplex	Multiplex Operator	UHF Channel Number *	Channel Frequency Fc (MHz) **	Transmitter Power (kW)
BBC A	BBC	32	562.000	100.0
D3&4	Digital 3 & 4	34	578.000	100.0
BBC B - HD	BBC	35	586.000	100.0
SDN	SDN	29	538.000	100.0
Arqiva A	Arqiva	49	698.000	100.0
Arqiva B	Arqiva	37	602.000	100.0
COM7 - HD	Arqiva	55	746.000	22.9

Table A - Winter Hill Digital Terrestrial Television Services

Public Service Broadcaster (PSB) Digital Multiplexes
Commercial (COM) Digital Multiplexes

* - Digital multiplexes with a "+" or "-" sign operate with a frequency offset making the channel frequency + or - 167 kHz

** - The nominal channel frequency, Fc (in Megahertz) of the multiplex can be calculated using $F_c = 8n + 306$, where 'n' is the UHF channel number

VHF (FM) Radio Transmission Frequencies

Service	Frequency (MHz)	Transmitter Power (kW)
BBC Radio 1	98.9	250
BBC Radio 2	89.3	250
BBC Radio 3	91.5	250
BBC Radio 4	93.7	250

Table B - Holme Moss VHF (FM) Radio Services

Information correct at time of writing. Information provided by DigitalUK and Arqiva

Signal Measurements

Measurement Point Number	Channel Frequency Service	32 562.00 BBC A	34 578.00 D3&4	35 588.00 BBC B	29 538.00 SDN	49 698.00 Arqiva A	37 602.00 Arqiva B	55 748.00 COM7
1	FS	90.3	87.0	86.0	92.1	89.3	89.4	81.8
	CSI	21.7	19.4	-	19.1	20.3	20.5	-
	MER	29.6	30.4	-	30.6	30.3	31.0	-
2	FS	88.8	89.0	92.6	86.3	91.1	85.9	83.1
	CSI	20.2	21.8	-	21.7	23.9	19.9	-
	MER	29.9	28.9	-	29.8	30.0	31.3	-
3	FS	88.4	84.0	89.5	88.5	86.0	90.3	83.4
	CSI	26.5	24.4	-	19.2	20.7	23.2	-
	MER	29.4	32.2	-	29.9	31.0	30.0	-
4	FS	88.4	85.8	89.5	91.0	96.6	89.4	87.8
	CSI	19.4	23.1	-	20.8	18.4	19.4	-
	MER	32.0	29.4	-	30.3	29.5	30.1	-
5	FS	90.3	87.3	93.5	93.0	93.2	85.3	78.5
	CSI	18.1	19.0	-	19.0	20.0	24.8	-
	MER	31.8	31.4	-	30.4	29.6	30.7	-
6	FS	96.0	90.7	89.2	88.7	86.6	89.3	83.9
	CSI	20.4	17.9	-	19.7	16.9	17.5	-
	MER	31.5	29.7	-	30.0	29.9	30.6	-
7	FS	86.7	92.5	86.7	90.5	88.7	89.4	78.2
	CSI	20.3	21.2	-	17.2	20.1	21.3	-
	MER	30.1	29.1	-	30.4	29.7	31.6	-
8	FS	89.1	89.4	90.6	91.2	92.0	88.3	78.9
	CSI	19.5	17.6	-	22.9	23.0	17.5	-
	MER	30.5	31.4	-	30.4	30.0	29.9	-
9	FS	89.4	91.6	90.9	92.7	90.2	92.9	85.2
	CSI	21.5	28.0	-	21.2	18.7	19.4	-
	MER	31.2	31.0	-	28.8	31.1	31.9	-
10	FS	86.3	84.2	88.5	89.2	93.7	83.2	89.4
	CSI	24.4	23.9	-	19.0	19.8	27.0	-
	MER	31.1	31.2	-	29.4	30.4	28.8	-
11	FS	88.8	85.6	91.0	85.8	89.7	93.5	84.1
	CSI	19.2	26.5	-	21.3	17.6	29.3	-
	MER	30.9	29.6	-	29.0	31.3	28.0	-
12	FS	90.2	85.7	88.6	91.8	90.0	90.3	80.4
	CSI	17.2	18.1	-	19.5	23.9	22.5	-
	MER	31.8	30.6	-	30.3	31.9	30.9	-

Table C - Field Strength Measurements of Winter Hill Digital Television Services

Frequencies listed are in MHz

Field strength (FS) values are indicated in dB μ V/m

CSI Channel Status Information (%)

MER Modulation Error Ratio (dB)

Location	Service	Radio 1	Radio 2	Radio 3	Radio 4
1		66.6	66.0	67.9	68.4
2		68.6	63.1	66.4	67.2
3		71.6	65.0	64.1	60.0
4		63.1	64.6	64.5	66.0
5		70.3	64.9	69.2	73.4
6		63.8	63.6	68.2	69.7
7		63.8	68.0	69.2	61.5
8		65.9	62.5	67.3	71.5
9		61.7	64.8	58.6	64.8
10		62.0	67.4	66.4	67.0
11		61.6	66.0	64.1	72.0
12		60.7	59.6	63.4	61.5

Table D - Field Strength Measurements of Holme Moss VHF(FM) Radio Services

Field strength (FS) values are indicated in dB μ V/m

An Overview of Signal Measurements

The first and easiest parameter to check is signal level (also referred to as amplitude or terminated signal strength). In many cases this gives a good indication of the available decoding margin, or the extent of any shortfall.

At the receiver input, the terminated level of a DTT signal is measured in the usual units of dB μ V (a maximum signal level of 70 dB μ V and a minimum signal level of 50 dB μ V). It is helpful to understand that the level of a DTT signal represents the total power of all the carriers in the Coded Orthogonal Frequency Division Multiplexing (COFDM) signal and not the level of each individual COFDM carrier. For satisfactory reception of digital signals, it is important the signals applied to the receiver are within these ranges. These maximum and minimum levels define a so-called window of operation for the receiver.

Common practice dictates that in order to measure the quality of a received DTT signal we have to look at one or more of the following parameters: Bit-Error Rate (BER), Channel BER (CBER), Carrier-to-Noise Ratio (CNR) and Modulation Error Ratio (MER). The Channel State Information (CSI) feature available in DTT measurement equipment is a very valuable tool providing additional insight into the quality of reception in a typical domestic or professional DTT installation.

Using the BER alone is an ill-advised “hit-or-miss” strategy because of the 'cliff-edge effect' characteristic of any digital TV system. A BER reading below the reference quasi error free (QEF) value of 2×10^{-4} might wrongly lead us to conclude that the receiving conditions are satisfactory.

However, the BER provides a very narrow signal measurement range. Even for vanishingly small BER readings, a small drop in the level of received DTT signal can push the DTT receiver over the digital cliff edge beyond the point of system failure. The CBER is closely related to the BER providing a wider signal measurement range. Depending on the type(s) of unknown disturbance(s) affecting our DTT installation (noise, co-channel or adjacent PAL, co-channel DTT, etc.), the CBER corresponding to the reference QEF BER of 2×10^{-4} varies between 4 and 7 in 100 [1]. Unfortunately, the CBER is not a reliable indicator of how far the digital cliff edge is.

DTT engineers need a tool with a wide measurement range that solves the shortcomings of the BER and CBER. This measurement tool should provide some estimate of the noise margin of the DTT installation. A first candidate comes to mind: CNR or, alternatively, its sibling the MER.

The CNR is defined as the ratio of the average RF power of the DTT signal to the power of the noise present in the UHF channel. Similarly, the MER is defined as the ratio of the average power of the DTT signal to the average power of the constellation errors. It can therefore be used to give a more direct indication of decoding margin when, as is often the case, there is co-channel

interference as well as noise in the channel. The higher the MER value, the **better** the reception conditions. Our measurement equipment provides a maximum MER measurement value of up to 35 dB.

In situations where there is no multipath propagation so that the channel frequency response remains reasonably flat, CNR and MER are in principle the same thing. In practice, the accuracy of the measured CNR is limited by the noise floor of the measurement equipment and by the presence of other disturbances on adjacent UHF channels. Likewise, both the receiver's noise floor and other issues resulting from its practical implementation degrade the MER estimate.

Channel State Information (CSI)

Some flavour of CSI is used internally by all commercial DTT receivers to achieve the recommended target system performance⁴. The CSI counts the effect of both the noise present in the channel and the shape of the transmission channel itself. In other words, the CSI gives a measure of the reliability of the received DTT signal. We measure the average of the CSI across the UHF channel occupied by the DTT signal. The higher the percentage value of CSI, the **less** reliable DTT reception is.

As explained, the CSI can be used as a means to measure the noise margin in a DTT installation. Let us call CSI_{QEF} the percentage CSI measured at the point where the measurement equipment displays the reference QEF BER. The noise margin in dB is then approximately given by –

$$NM \text{ (dB)} = \frac{CSI_{QEF} - CSI}{2.6}$$

This empirical approximation represents a good estimate for NM below 8dB. The CSI alone, on the other hand, has a wider measurement range, providing meaningful results for NM of up to 15dB.

⁴ - J. Lago-Fernández, "Using Channel State Information (CSI) to Characterize DVB-T Reception", IBC, Amsterdam, 12-17 September 2002

Survey Equipment

1 x Promax Prolink 4C Premium – Serial Number PK4COPAB11B /
060419030005 Running firmware version 2.47

1 x Sony Wide screen CRT Reference Receiver KV-16TIU – Serial Number
4014480

1 x Professional Broadcast Wideband Log Periodic 8 element antenna –
Amphenol Jaybeam (details below)

 **Amphenol JAYBEAM**

468-860 MHz

A Log Periodic antenna designed for UHF Broadcast, TETRA and Cellular communications applications. This antenna is often used in a stacked array to form a rugged, high power, extended range antenna. Produced to the highest quality standards, these robust antenna designs will insure reliable operation in harsh environmental conditions.

Replace "x" with desired model number option.

LPU/Rx
V-Pol or H-Pol | Log Periodic | 70° | 7.9 dBd

Electrical Characteristics		
Frequency band	468-860 MHz	
Model number options (x)	Model Number LPU/R-N LPU/R-7/16	Connector type N-Female 7/16-DIN Female
Polarization	Vertical or Horizontal	
Horizontal beamwidth	70°	
Gain	7.9 dBd	
Impedance	50Ω	
VSWR	<1.3:1	
Maximum power	250 W	
Connector type	see model number options above	
Lightning protection	DC grounded	
Mechanical Characteristics		
Materials	Aluminium Alloy	
Dimensions (Length x Width)	1210 x 320 mm	47.6 x 12.6 in
Weight without bracket	3.5 kg	7.7 lbs
Mounting Options		
Mounting	Mounting bracket included to fit 38-50 mm dia. pipe.	



Technical Specification for an Amphenol Jaybeam Professional Broadcast Wideband Log Periodic 8-Element Antenna

All RF cables, interconnects and systems of professional quality and calibrated to determine feeder losses and antenna gains. These are factored into the results, providing accurate descriptions of actual field strength values at 10m AGL for each surveyed location – see *Calculation of Received Field Strength*

Calculation of Received Field Strength

The Field Strength (dBμV/m) is derived from the Terminated Level (dBμV) as measured at the input of the Promax measurement receiver in the survey vehicle.

Field Strength (dBμV/m) = Terminated Level (dBμV) – Aerial Gain (a) + Dipole Factor (b) + Feeder Loss (c)

where -

Dipole Factor (to matched load)	(b)	$20\text{Log}\left(\frac{2\pi}{\lambda}\right)$ <i>Where λ = Transmission Wavelength (m)</i>
Feeder Loss	(c)	3 dB
Aerial Gain (dB _{dipole})	(a)	10 dB

References

The building information found in Chapter 2 was sourced from the following Ofcom document –

http://licensing.ofcom.org.uk/binaries/spectrum/fixed-terrestrial-links/wind-farms/tall_structures.pdf

Mapping Data

This report includes mapping and mapping data provided by Ordnance Survey (OS), under the terms of the Open Government Licence, OS data Crown copyright and database copyright (2021).

TV Interference Questionnaire

Television Signal Survey Questionnaire

Contact details *please highlight (in bold or circle) your required method of contact*

Name:

Address (inc. postcode):

Telephone:

Mobile:

Email:

About your TV Signal

What provides the signal to the television set(s) in your home?

- ☐ Digital Satellite (Sky/Freesat)
- ☐ Digital Terrestrial (Freeview)
- ☐ Cable/Broadband (BT/Virgin Media)

Which of these rooms do you have a television set in?

- | | |
|--|------------------------------------|
| ☐ Lounge | ☐ Bedroom 2 |
| ☐ Dining room | ☐ Bedroom 3 |
| ☐ Kitchen | ☐ Bedroom 4 |
| ☐ Bedroom 1 | ☐ Bedroom 5 |
| ☐ Other
Please specify _____ | |

Which of these television sets have been affected by interference since (or during) the building's construction?

☐ Lounge

☐ Bedroom 2

☐ Dining room

☐ Bedroom 3

☐ Kitchen

☐ Bedroom 4

☐ Bedroom 1

☐ Bedroom 5

☐ Other

Please specify _____

What interference have you been experiencing?

When does this happen?

☐ Daytime

☐ Night time

How often does this happen?

☐ Daily

☐ Weekly

☐ Monthly

☐ Yearly

What channels are affected?

When did you first notice the interference?

Please feel free to add any additional comments

Signature:..... Date:.....

Planning Policies - National Planning Policies

National Planning Policy Framework (NPPF), Ministry of Housing, Communities & Local Government, July 2021

10. Supporting high quality communications

116. Local planning authorities should not impose a ban on new electronic communications development in certain areas, impose blanket Article 4 directions over a wide area or a wide range of electronic communications development, or insist on minimum distances between new electronic communications development and existing development. They should ensure that:

a) they have evidence to demonstrate that electronic communications infrastructure is not expected to cause significant and irremediable interference with other electrical equipment, air traffic services or instrumentation operated in the national interest; and

b) they have considered the possibility of the construction of new buildings or other structures interfering with broadcast and electronic communications services.

Planning Policies - Regional and Local Planning Policies and Guidance

Manchester City Council (MCC), "Full, Outline, Reserved Matters & Variation/Removal of Conditions Planning Applications - Is Your Application Valid?", September 2018 (revised January 2020), MCC

Television Reception

MCC planning guidance, any development over four storeys requires a TV reception impact assessment.

Information on TV and radio reception and interference. Please provide a report on the possible interference created by the proposed development on TV and radio reception within the area. You may wish to contact the Office of Communications (Ofcom) on tel. 0207 981 3000 for suggestions of companies who may be able to carry out such work. (Core Strategy Policy EN2)

Tall Buildings

*If the proposed building is considered to be a 'Tall Building', you will need to make a case for the height of the tall element and take into consideration Historic England and Design Council guidance on 'Tall Buildings'. The design statement should make reference to Design Council guidance to assess its impact on the surrounding area. A visual impact assessment with visualisations of the building form key views needs to be included. The statement should include details of pre-application discussions held with local residents and the outcome of these discussions. If the Proposal is a Tall Building, it may require an Environmental Statement, as it would have the potential to generate significant impacts over and above the existing use(s) on site. Most notably impacts relating to visual impact; wind microclimate; sunlight / daylight / shading / solar dazzle / privacy and overlooking; transport issues; noise and vibration; air quality; ground conditions and contamination; water resources hydrology; **radio and television interference**; and sustainability. (Core Strategy Policy EN2)*

DISCLAIMER

This Report was completed by GTech Surveys Limited on the basis of a defined programme of work and terms and conditions agreed with the Client. We confirm that in preparing this Report we have exercised all reasonable skill and care taking into account the project objectives, the agreed scope of works, prevailing site conditions and the degree of manpower and resources allocated to the project.

GTech Surveys Limited accepts no responsibility to any parties whatsoever, following the issue of the Report, for any matters arising outside the agreed scope of the works. This work was conducted under GTech Surveys Limited's standard terms and conditions which can be found on our website.

This Report is issued in confidence to the Client and GTech Surveys Limited have no responsibility to any third parties to whom this Report may be circulated, in part or in full, and any such parties rely on the contents of the report solely at their own risk.

The UK's terrestrial television and radio networks are highly complex engineering systems and are constantly being modified, re-designed, upgraded and maintained. The reception conditions detailed in this report were those prevailing at the time of the survey in the study area. Engineering work at transmitter sites, weather conditions and the time of the year will influence the quality and coverage of terrestrial services and their susceptibility to interference. Whilst every effort was made to accurately measure and assess the available television and radio transmissions and services at the time of the survey, GTech Surveys Limited cannot assume that any part of the television or radio broadcast network or transmission from any transmitter was operating in required specification or correctly to any design criteria. The signal measurements undertaken during the survey work were used to define the possible impacts to television and radio reception for this project. Although best practice has been applied in understanding the potential impacts, due to the complex nature of the subject, GTech Surveys Limited is not accountable in anyway whatsoever if unpredicted impacts occur at any location anywhere in the study area.

Modelling parameters assume that all installed UHF antenna systems are mounted at least 10m AGL and installed to a modern standard, with all components meeting CAI quality standards. Antennas mounted at lower heights and poor-quality installations will be more prone to the effects of interference from external sources and as such, reception conditions to installations with the aforementioned characteristics have not been accounted for in any impact modelling. Consequently, properties with such installations may be prone to interference effects that have not been identified. Such installations are commonly found in camping and caravan parks, on bungalows and properties where it is not possible to attach an antenna to the exterior roof. Antennas mounted in lofts are also more prone to interference effects arising from the signal attenuation caused by roofing materials. Again, reception conditions to properties with the aforementioned antenna installation characteristics have not been accounted for in any impact modelling and as such, properties with these installations may be prone to interference effects that have not been identified.

Digital terrestrial television (Freeview) coverage may vary as a result of engineering works or any frequency changes authorised by Ofcom. We advise that consumers always check future reception predictions (<http://www.digitaluk.co.uk/coveragechecker/>) before buying TV equipment. GTech Surveys Limited, Ofcom and Digital UK are not responsible for household TV reception arrangements.

Unless specifically assigned or transferred within the terms of the agreement, the consultant asserts and retains all Copyright, and other Intellectual Property Rights, in and over the Report and its contents.

Any questions or matters arising from this Report should be addressed in the first instance to the Project Manager.