


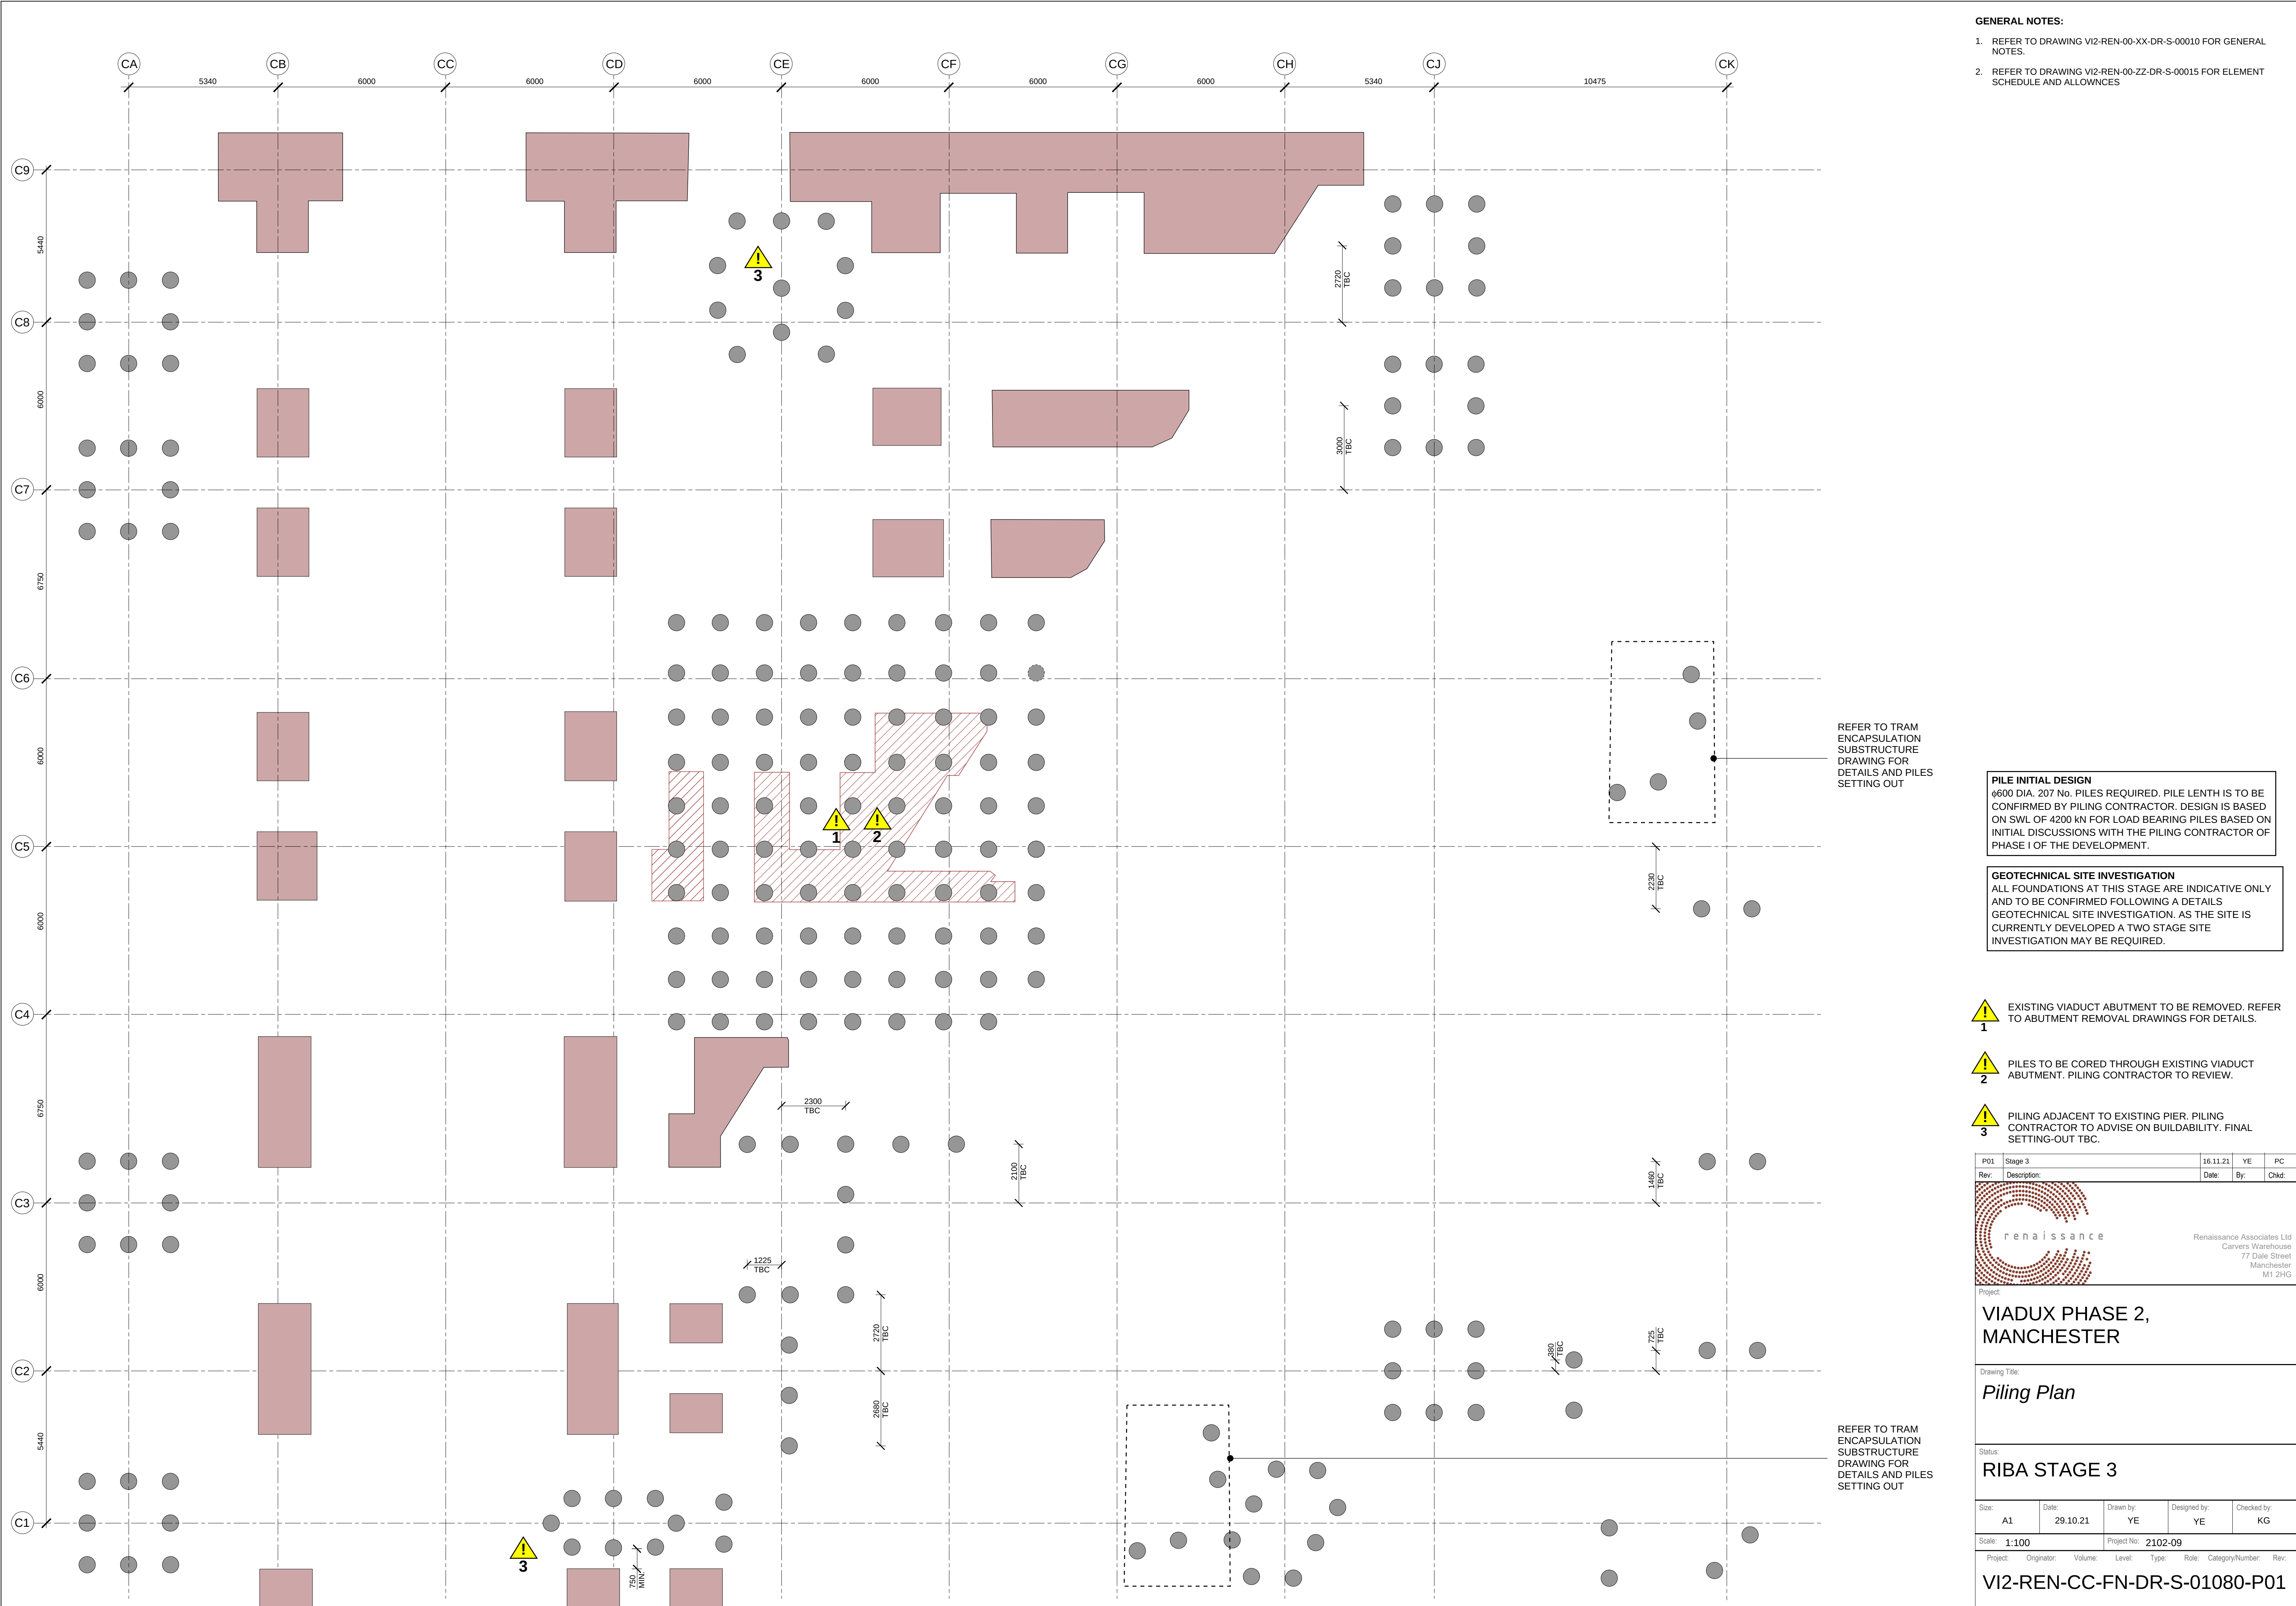

- GENERAL NOTES:**
1. REFER TO DRAWING VI2-REN-00-XX-DR-S-00010 FOR GENERAL NOTES.
 2. REFER TO DRAWING VI2-REN-00-ZZ-DR-S-00015 FOR ELEMENT SCHEDULE AND ALLOWNCES

PILE INITIAL DESIGN
ø600 DIA. 207 No. PILES REQUIRED. PILE LENTH IS TO BE CONFIRMED BY PILING CONTRACTOR. DESIGN IS BASED ON SWL OF 4200 kN FOR LOAD BEARING PILES BASED ON INITIAL DISCUSSIONS WITH THE PILING CONTRACTOR OF PHASE I OF THE DEVELOPMENT.

GEOTECHNICAL SITE INVESTIGATION
ALL FOUNDATIONS AT THIS STAGE ARE INDICATIVE ONLY AND TO BE CONFIRMED FOLLOWING A DETAILS GEOTECHNICAL SITE INVESTIGATION. AS THE SITE IS CURRENTLY DEVELOPED A TWO STAGE SITE INVESTIGATION MAY BE REQUIRED.

- 1** EXISTING VIADUCT ABUTMENT TO BE REMOVED. REFER TO ABUTMENT REMOVAL DRAWINGS FOR DETAILS.
- 2** PILES TO BE CORED THROUGH EXISTING VIADUCT ABUTMENT. PILING CONTRACTOR TO REVIEW.
- 3** PILING ADJACENT TO EXISTING PIER. PILING CONTRACTOR TO ADVISE ON BUILDABILITY. FINAL SETTING-OUT TBC.

P01	Stage 3	16.11.21	YE	PC
Rev:	Description:	Date:	By:	Chkd:



Renaissance Associates Ltd
Carvers Warehouse
77 Dale Street
Manchester
M1 2HG

Project:

VIADUX PHASE 2, MANCHESTER

Drawing Title:

Piling Plan

Status:

RIBA STAGE 3

Size:	Date:	Drawn by:	Designed by:	Checked by:
A1	29.10.21	YE	YE	KG

Scale:	1:100	Project No:	2102-09				
Project:	Originator:	Volume:	Level:	Type:	Role:	Category/Number:	Rev:

VI2-REN-CC-FN-DR-S-01080-P01