

Project: YOTEL_Rebranding
Project #: YOTEL_Manchester Deansgate

Issue Date: 01 JAN 2022
Revision Date:

Item Name	Fixed colour LED strip light
Description	High density Dynamic LED fixed purple colour, strip lighting (manufacturer must provide sample spec for Purple LED for approval)
Rated power	15 W/meter
Brightness	Minimum of 1200 lumens per meter
Product Dimensions	Sized to suit case good. Thickness 3.5mm, Max length: 10m
LED Density	120 dots per meter. Product specified must provide a homogenous line of light in direct view. Dotting of LED behind the diffuser is not acceptable.
RGB LED strip colour	111 39 137 (Sample for approval to be provided)
IP Rating	IP rating for LED drip located above sink. Minimum IP67 required due to close proximity to water
Drivers	Drivers to be concealed within shelf component with easy access for maintenance - refer to drawing PMC-J102. DALI control type to be used to maximise dimming curve for low level light scenes
Dimmable	Yes
Note	LED strip light to be placed in opal diffuser for homogenous line of light without visual spotting of LED to be affixed to aluminium heat sink profile, end caps and mounting clips mounted underneath shelf element. Please refer to drawing PMC-J102

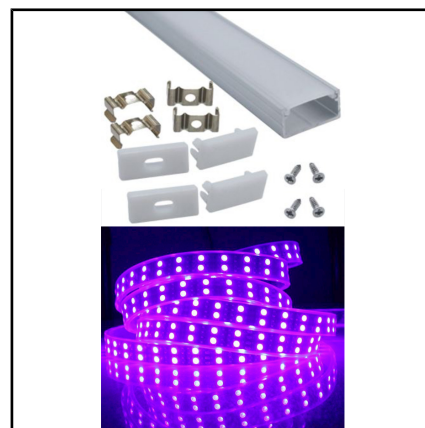


Image is indicative only

AREAS

SPECIAL INSTRUCTIONS:

1. All specifications to be read in conjunction with detail drawings
2. Any substitutions must be approved by the YOTEL design team and adhere to all the relevant requirements set out within the YOTEL Brand Standards – Dynamic Lighting. Please refer to YOTEL Brand standards - Dynamic Lighting for performance specification
3. Please refer to YOTEL Brand standards - Dynamic Lighting for performance specification
4. Dimming protocol to be coordinated with lighting control specification
5. To be supplied by contractor and free-issued to casegood manufacturer for installation.