

GENERAL NOTES

- REMOTE DRIVER POSITIONS SHALL BE AGREED ONSITE WITH THE MAIN CONTRACTOR. THE AGREED LOCATIONS ARE TO BE OUT OF DIRECT VIEW BUT ACCESSIBLE FOR TENDENCY MAINTENANCE REQUIREMENTS.
- IF THE REMOTE DRIVER POSITIONS ARE TO BE LOCATED EXTERNALLY, THE MAIN CONTRACTOR SHALL ALLOW FOR THE APPROPRIATE LOCATION OUT OF DIRECT VIEW FROM GROUND AND FIRST FLOOR LEVEL.
- CABLEING TO THE LUMINAIRES SHALL BE INSTALLED NEATLY AND CONCEALED WHERE POSSIBLE, UTILISING LEDGE DETAILS ETC TO FIX THE CABLEING FROM DIRECT VIEW FROM GROUND AND FIRST FLOOR LEVEL.
- ALL ELECTRICAL JUNCTION BOXES SHALL BE INSTALLED NEATLY AND CONCEALED FROM DIRECT VIEW WHERE POSSIBLE. UTILISING LEDGE DETAILS ETC TO FIX THE JUNCTION BOXES FROM DIRECT VIEW FROM GROUND AND FIRST FLOOR LEVEL. JUNCTION BOXES SHALL BE COLOUR MATCHED TO MATCH EXISTING STRUCTURES.
- FIXING DETAILS
- FIXING OF ALL LIGHTING EQUIPMENT SHALL BE AGREED ONSITE WITH THE MAIN CONTRACTOR AND PROJECT ARCHITECT / CONSERVATION SPECIALIST.
- FIXING DETAILS SHOULD HAVE MINIMAL IMPACT ON THE FABRIC OF BUILDING WHERE POSSIBLE, BUT SHALL ENSURE ALL LIGHTING EQUIPMENT IS PERMANENTLY FIXED AND SAFELY INSTALLED.
- FINAL FIXING POSITIONS TO BE REVIEWED AND AGREED ONSITE WITH THE MAIN CONTRACTOR FOLLOWING THE LIGHTING MOCK UP REVIEW.

LIGHTING CONTROL

- THE EXTERNAL LIGHTING SHALL BE CONTROLLED VIA THE SPECIFIED ARCHITECTURAL LIGHTING CONTROL SYSTEM, WITH AUTOMATIC SWITCH ON/AN AN EXTERNAL MOUNTED PHOTOCELL. PHOTOCELL LOCATION TO BE AGREED ONSITE WITH THE MAIN CONTRACTOR.
- TIMED SCENE TRANSITIONS SHALL BE PROGRAMMED THROUGH THE LIGHTING CONTROL SYSTEM, WITH AN AGREED AUTOMATIC SWITCH OFF THE PROGRAMMED IN MANUAL OVERRIDE OF THE EXTERNAL FACADE LIGHTING SHALL BE PROVIDED VIA THE MASTER SCENE SET CONTROLLER.
- ALL EXTERNALLY MOUNTED LUMINAIRES SHALL HAVE DIMMING CONTROL, UNLESS STATED OTHERWISE ON THE LUMINAIRE SCHEDULE ARCHITECTURAL LIGHTING MOCK UP.
- WHERE FEASIBLE ALL EXTERNAL LIGHTING ELEMENTS SHALL BE MOCKED UP / TESTED WITH THE PROPOSED LIGHTING EQUIPMENT PRIOR TO INSTALLATION. THE MAIN CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROPOSED LIGHTING EQUIPMENT SPECIALISTS AND LIGHTING DESIGNER PRESENT TO ENSURE ALL PARTIES ARE HAPPY WITH THE PROPOSED EFFECTS.
- THE MAIN CONTRACTOR SHALL PROVIDE POWER AND SAFE ACCESS FOR THE MOCK UP WITH THE ELECTRICAL CONTRACTOR UNDERPINNING THE TEMPORARY INSTALLATION WORKS FOR THE TESTS.
- THE MOCK UP SHALL BE VIEWED DURING THE HOURS OF DARKNESS TO VIEW THE PROPOSED LIGHTING EFFECTS. THE MAIN CONTRACTOR / ELECTRICAL INSTALLER SHALL MAKE THE APPROPRIATE ALLOWANCES FOR UNDERPINNING THE MOCK UP WORKS AND EVENING (NIGHTTIME) LIGHT TESTS.
- EXTERNAL SIGNAGE
- SIGNAGE LIGHTING AND EXTERNALLY ILLUMINATED SIGNAGE TO BE CONFINED




EXTERNAL FEATURE LIGHTING DESIGN INTENT - MAIN FACADE



EXTERNAL FEATURE LIGHTING DESIGN INTENT - MAIN ENTRANCE



IP RATED REMOTE DRIVER BOX SIZE 120MM X 80MM X 50MM. NO DRIVER BOX PER 2ND SPOTLIGHTS. DRIVER BOX TO BE LOCATED CENTRAL TO WINDOW AND POSITIONED VISUAL IMPACT ON THE STONE LEDES LOOKING OUT INTERNALLY AND VIEWS FROM GROUND LEVEL EXTERNALLY

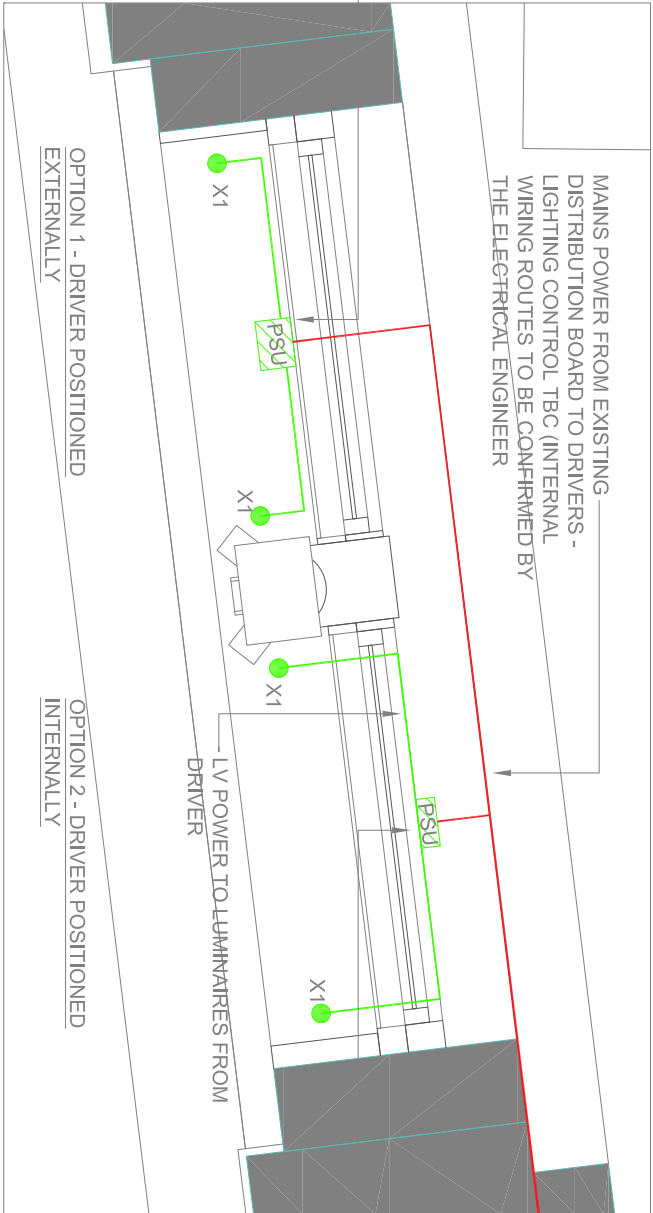

DRIVER SIZE TO BE CONFIRMED FOR INTERIOR SOLUTION. TWO DRIVER PER 2ND SPOTLIGHTS. DRIVER TO BE LOCATED WITHIN POSITIONED LOCALLY TO WINDOW.

DRIVER TO BE LOCATED INTERNALLY. TWO DRIVER PER 2ND LINEAR LED LIGHTS.



NOTES

- DO NOT SCALE FROM THIS DRAWING
- ALL DIMENSIONS ARE STATED IN MILLIMETERS
- THIS DRAWING IS DESIGN INTENT ONLY, AND SHALL NOT BE USED FOR CONSTRUCTION PURPOSES
- THIS DRAWING SHALL BE READ IN COORDINATION WITH THE LUMINAIRE SCHEDULE
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH THE LIGHTING SPECIFICATION DOCUMENT
- CONSTRUCTION DRAWINGS SHALL BE PROVIDED BY OTHERS
- COORDINATION OF THE M&E SERVICES ONSITE SHALL BE UNDERPINNED BY THE MAIN CONTRACTOR
- THE MAIN CONTRACTOR SHALL ENSURE THE LIGHTING EQUIPMENT IS INSTALLED IN LINE WITH NATIONAL REGULATORY GUIDANCE
- THE MAIN CONTRACTOR SHALL UNDERTAKE A FEASIBILITY STUDY TO ASSESS THE PROPOSED FITTING LOCATIONS, LUMINAIRE SIZES, FIXING DETAILS AND CABLEING ROUTES. THE STUDY RESULTS AND RAISING ANY ISSUES THAT MIGHT ARISE FROM THE STUDY
- FINAL LUMINAIRE HEIGHTS FOR WALL MOUNTED FITTINGS AND PENDANTS FITTINGS SHALL BE AGREED BY THE ARCHITECT AND INTERIOR DESIGNER PRIOR TO INSTALLATION

REMOTE LED DRIVERS

THE MAIN CONTRACTOR SHALL ENSURE ALL REMOTE LED DRIVERS ARE CONCEALED FROM DIRECT VIEW IN ACCESSIBLE POSITIONS FOR MAINTENANCE PURPOSES.

LINEAR LED LIGHTING

LED POSITION WITHIN COFFERS TO BE AGREED ONSITE PRIOR TO FINAL INSTALLATION

THE MAIN CONTRACTOR SHALL CONSIDER FINAL LED LENGTHS FOR ALL MOUNTED PRODUCTS WHICH SHALL COORDINATED WITH ARCHITECTURAL DETAILS AND JOINERY ELEMENTS