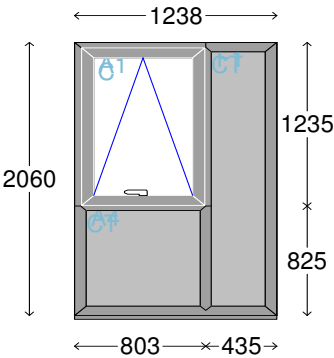


Order Acknowledgement

	Customer & Order Information	
	RP Tyson Construction Ltd	Job No : T6946-0-R2 Production Date : Delivery Date : Processed Date : 10-Jun-2020 Printed Date : 11-Jun-2020 Order Date : 10-Jun-2020
	Tel : Fax :	Job Spec Glazed / Supply & fix
Jade Windows 622 Bradford Road Batley West Yorkshire WF17 8HF Tel: 01924 438 277 Fax:		Job Reference : Kingsway-Level 0-Rev2

1	Elite 70 Bevelled Casement	
	Qty (5) O/A Sizes 1238mm x 2090mm (CASE 23 [Rev])	
	Type A-LHS-36db	
		
192.31 kg : 423.97 lb		
Specification	Chk	Chk
Frame (Head)	B03 70mm Frame	[]
Frame (Left jamb)	B03 70mm Frame	[]
Transom	B10/11 66mm T/Z Section	[]
Sash (Head)	B30/31 75mm T/Z Sash	[]
Sash (Left jamb)	B30/31 75mm T/Z Sash	[]
Cill	C085 85mm Bull Nose Cill	[]
Add-on (Cill)	No add-on	[]
Add-on (Right jamb)	No add-on	[]
Ventilator (Sash)	No ventilator	[]
Ventilator (Frame)	No ventilator	[]
Sash colour	Grey Woodgrain on White	[]
Drainage	Concealed/Base	[]
Bead type	B62 Ovolo Step Bead	[]
Casement locking	Mushroom espag	[]
Restrictor	Window Restrictor Spring-Latch	[]
Open in/out	Open out	[]
Reinforcing rule	Normal Reinforcing	[]
Tran/Mull joints	Welded joint	[]
	Frame (Cill)	B03 70mm Frame []
	Frame (Right jamb)	B03 70mm Frame []
	Mullion	B10/11 66mm T/Z Section []
	Sash (Cill)	B30/31 75mm T/Z Sash []
	Sash (Right jamb)	B30/31 75mm T/Z Sash []
	Add-on (Head)	No add-on []
	Add-on (Left jamb)	No add-on []
	Ventilator (Head)	No ventilator []
	Ventilator (Glass)	No ventilator []
	Colour	Grey Woodgrain on White []
	Cill colour	Grey Woodgrain on White []
	Georgian cruciform jo	Mullions run through []
	Handle	White Espag Handle []
	Friction stay	Std stay []
	Viewed from	Viewed from outside []
	Glazed in/out	Glazed in []
	Reinforcing type	Steel Reinforcing []
	Secure By Design	Required []
Glazing Details & Apertures		
4-20-4 Clear s/c : 20mm Thermal Spacer Arqon Gas Filled		
A1 - (634 x 1066)		
4-20-4 Clear s/c TUF : 20mm Thermal Spacer Arqon Gas Fillec		
A4 - (728 x 750) F1 - (360 x 1948)		

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Continued

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Continued

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Frame colour: Anthracite grey grained (RAL7016) to external face & smooth white to base & internal face

Spring restrictor - X1no to each sash as stated. Flick override action to open & auto re-engage when sash closed. Limited to circa 90mm before override.

No trickle vents.

Overall U-Value is 1.4

Presume all windows are to receive pressed aluminium cills by others post our works. We have therefore allowed for 85mm cills on each window only as shown on section drawings. PLEASE CHECK/CONFIRM THIS

Most of the window openings have been changed to top hung as they exceed side hung maximum limitations, as previously advised. Easy clean hinges only available on side hung openings.

GLAZING

Drawing "5011-A" shows hatched areas where safety glazing is required. All non shaded areas are not safety glass, i.e. toughened or laminated.

See below glass specifications:

36db RW + Ctr = 6.8mm clear acoustic laminate / 10mm argon cavity / 10mm clear planitherm total plus (toughened as stated)

34db RW + Ctr = 10mm clear toughened / 12mm argon cavity / 6mm clear planitherm total plus (toughened as stated)

Please check the above glass is acceptable for barrier/guarding (if required) and for the building risk assessment.

Drawing "5001-A" states "solar control" glass but not provide any further information at all. We have therefore proposed to use planitherm total + glass which offers a G-Value of 0.6614 for the 36db glass specification and 0.6799 for the 34db glass specification.

NB - all sizes are from drawing "5011-A" less 10mm for standard tolerance - please check this is correct. JADE can NOT be responsible for any incorrect sizes. We therefore urge you to double check all sizes are correct before you approve the drawings, including all transom heights etc...

It is the customers (RP Tyson Construction Ltd) responsibility to ensure all details are correct on these drawings. Any errors (Jade's or otherwise) will be the customers responsibility and chargeable in full for replacements. These drawings herewith supersede any architect drawings or details when you approve them for manufacture. We therefore urge you to carefully check all details before you approve them for manufacture. Ask if in doubt before approval, which will action manufacture, after which no changes can be made.

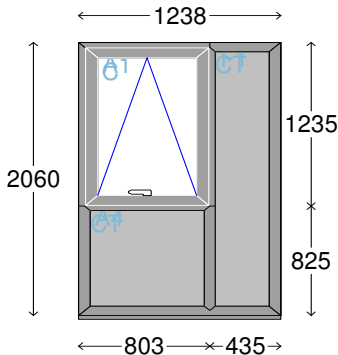
Total	£0.00
VAT @ 20.00%	£0.00
Total (Incl. VAT)	£0.00
Deposit	£0.00
Balance	£0.00

I confirm the details of this order are correct as detailed in this document

Signed _____ Dated _____

Order Acknowledgement

	Customer & Order Information	
	RP Tyson Construction Ltd	Job No : T6946-1-R2 Production Date : Delivery Date : Processed Date : 10-Jun-2020 Printed Date : 11-Jun-2020 Order Date : 10-Jun-2020
	Tel : Fax :	Job Spec Glazed / Supply & fix
Jade Windows 622 Bradford Road Batley West Yorkshire WF17 8HF Tel: 01924 438 277 Fax:		Job Reference : Kingsway-Level 1-Rev2

1	Elite 70 Bevelled Casement	
	Qty (6) O/A Sizes 1238mm x 2090mm (CASE 23 [Rev])	
	Type A-LHS-36db	
		
230.77 kg : 508.77 lb		
Specification	Chk	Chk
Frame (Head)	B03 70mm Frame	[]
Frame (Left jamb)	B03 70mm Frame	[]
Transom	B10/11 66mm T/Z Section	[]
Sash (Head)	B30/31 75mm T/Z Sash	[]
Sash (Left jamb)	B30/31 75mm T/Z Sash	[]
Cill	C085 85mm Bull Nose Cill	[]
Add-on (Cill)	No add-on	[]
Add-on (Right jamb)	No add-on	[]
Ventilator (Sash)	No ventilator	[]
Ventilator (Frame)	No ventilator	[]
Sash colour	Grey Woodgrain on White	[]
Drainage	Concealed/Base	[]
Bead type	B62 Ovolo Step Bead	[]
Casement locking	Mushroom espag	[]
Restrictor	Window Restrictor Spring-Latch	[]
Open in/out	Open out	[]
Reinforcing rule	Normal Reinforcing	[]
Tran/Mull joints	Welded joint	[]
	Frame (Cill)	B03 70mm Frame []
	Frame (Right jamb)	B03 70mm Frame []
	Mullion	B10/11 66mm T/Z Section []
	Sash (Cill)	B30/31 75mm T/Z Sash []
	Sash (Right jamb)	B30/31 75mm T/Z Sash []
	Add-on (Head)	No add-on []
	Add-on (Left jamb)	No add-on []
	Ventilator (Head)	No ventilator []
	Ventilator (Glass)	No ventilator []
	Colour	Grey Woodgrain on White []
	Cill colour	Grey Woodgrain on White []
	Georgian cruciform jo	Mullions run through []
	Handle	White Espag Handle []
	Friction stay	Std stay []
	Viewed from	Viewed from outside []
	Glazed in/out	Glazed in []
	Reinforcing type	Steel Reinforcing []
Glazing Details & Apertures		
4-20-4 Clear s/c : 20mm Thermal Spacer Arqon Gas Filled		
A1 - (634 x 1066)		
4-20-4 Clear s/c TUF : 20mm Thermal Spacer Arqon Gas Fillec		
A4 - (728 x 750) F1 - (360 x 1948)		

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

9	Elite 70 Bevelled Casement			
	Qty (4) O/A Sizes 688mm x 2090mm (CASE 1)			
	Type K-1/2 - 34db			
688 2060 688 3mm steel coupler Continious cill 89.76 kg : 197.89 lb				
Specification		Chk		Chk
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing
Glazing Details & Apertures				
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec		
A1 - (576 x 1948)				

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

12	Elite 70 Bevelled Casement O/A Sizes 622mm x 2230mm (CASE 1)			
	Type EB(w) - 34db			
622 2200 622 3mm steel coupler 21.30 kg : 46.95 lb				
Specification		Chk		Chk
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing
Glazing Details & Apertures				
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec		
A1 - (510 x 2088)				

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt Continued

14	Elite 70 Bevelled Casement O/A Sizes 397mm x 2230mm (CASE 1)			
	Type EC(w) - 34db			
397 2200 397 3mm steel coupler 11.90 kg : 26.24 lb				
Specification		Chk		Chk
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing
Glazing Details & Apertures				
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec		
A1 - (285 x 2088)				

Frame colour: Anthracite grey grained (RAL7016) to external face & smooth white to base & internal face

Spring restrictor - X1no to each sash as stated. Flick override action to open & auto re-engage when sash closed. Limited to circa 90mm before override.

No trickle vents.

Overall U-Value is 1.4

Presume all windows are to receive pressed aluminium cills by others post our works. We have therefore allowed for 85mm cills on each window only as shown on section drawings. PLEASE CHECK/CONFIRM THIS

Most of the window openings have been changed to top hung as they exceed side hung maximum limitations, as previously advised. Easy clean hinges only available on side hung openings.

GLAZING

Drawing "5011-A" shows hatched areas where safety glazing is required. All non shaded areas are not safety glass, i.e. toughened or laminated.

See below glass specifications:

36db RW + Ctr = 6.8mm clear acoustic laminate / 10mm argon cavity / 10mm clear planitherm total plus (toughened as stated)

34db RW + Ctr = 10mm clear toughened / 12mm argon cavity / 6mm clear planitherm total plus (toughened as stated)

Please check the above glass is acceptable for barrier/guarding (if required) and for the building risk assessment.

Drawing "5001-A" states "solar control" glass but not provide any further information at all. We have therefore proposed to use planitherm total + glass which offers a G-Value of 0.6614 for the 36db glass specification and 0.6799 for the 34db glass specification.

NB - all sizes are from drawing "5011-A" less 10mm for standard tolerance - please check this is correct. JADE can NOT be responsible for any incorrect sizes. We therefore urge you to double check all sizes are correct before you approve the drawings, including all transom heights etc...

It is the customers (RP Tyson Construction Ltd) responsibility to ensure all details are correct on these drawings. Any errors (Jade's or otherwise) will be the customers responsibility and chargeable in full for replacements. These drawings herewith supersede any architect drawings or details when you approve them for manufacture. We therefore urge you to carefully check all details before you approve them for manufacture. Ask if in doubt before approval, which will action manufacture, after which no changes can be made.

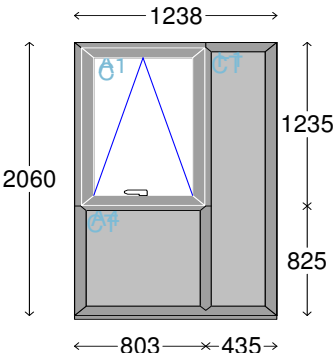
Total	£0.00
VAT @ 20.00%	£0.00
Total (Incl. VAT)	£0.00
Deposit	£0.00
Balance	£0.00

I confirm the details of this order are correct as detailed in this document

Signed _____ Dated _____

Order Acknowledgement

	Customer & Order Information	
	RP Tyson Construction Ltd	Job No : T6946-2-R2 Production Date : Delivery Date : Processed Date : 10-Jun-2020 Printed Date : 11-Jun-2020 Order Date : 10-Jun-2020
	Tel : Fax :	Job Spec Glazed / Supply & fix
Jade Windows 622 Bradford Road Batley West Yorkshire WF17 8HF Tel: 01924 438 277 Fax:		Job Reference : Kingsway-Level 2-Rev2

1	Elite 70 Bevelled Casement	
	Qty (6) O/A Sizes 1238mm x 2090mm (CASE 23 [Rev])	
	Type A-LHS-36db	
		
230.77 kg : 508.77 lb		
Specification	Chk	Chk
Frame (Head)	B03 70mm Frame	[]
Frame (Left jamb)	B03 70mm Frame	[]
Transom	B10/11 66mm T/Z Section	[]
Sash (Head)	B30/31 75mm T/Z Sash	[]
Sash (Left jamb)	B30/31 75mm T/Z Sash	[]
Cill	C085 85mm Bull Nose Cill	[]
Add-on (Cill)	No add-on	[]
Add-on (Right jamb)	No add-on	[]
Ventilator (Sash)	No ventilator	[]
Ventilator (Frame)	No ventilator	[]
Sash colour	Grey Woodgrain on White	[]
Drainage	Concealed/Base	[]
Bead type	B62 Ovolo Step Bead	[]
Casement locking	Mushroom espag	[]
Restrictor	Window Restrictor Spring-Latch	[]
Open in/out	Open out	[]
Reinforcing rule	Normal Reinforcing	[]
Tran/Mull joints	Welded joint	[]
	Frame (Cill)	B03 70mm Frame []
	Frame (Right jamb)	B03 70mm Frame []
	Mullion	B10/11 66mm T/Z Section []
	Sash (Cill)	B30/31 75mm T/Z Sash []
	Sash (Right jamb)	B30/31 75mm T/Z Sash []
	Add-on (Head)	No add-on []
	Add-on (Left jamb)	No add-on []
	Ventilator (Head)	No ventilator []
	Ventilator (Glass)	No ventilator []
	Colour	Grey Woodgrain on White []
	Cill colour	Grey Woodgrain on White []
	Georgian cruciform jo	Mullions run through []
	Handle	White Espag Handle []
	Friction stay	Std stay []
	Viewed from	Viewed from outside []
	Glazed in/out	Glazed in []
	Reinforcing type	Steel Reinforcing []
Glazing Details & Apertures		
4-20-4 Clear s/c : 20mm Thermal Spacer Arqon Gas Filled		
A1 - (634 x 1066)		
4-20-4 Clear s/c TUF : 20mm Thermal Spacer Arqon Gas Fillec		
A4 - (728 x 750) F1 - (360 x 1948)		

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

9	Elite 70 Bevelled Casement			
	Qty (4) O/A Sizes 688mm x 2090mm (CASE 1)			
	Type K-1/2 - 34db			
688 2060 688 3mm steel coupler Continious cill 89.76 kg : 197.89 lb				
Specification		Chk		Chk
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing
Glazing Details & Apertures				
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec		
A1 - (576 x 1948)				

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

12	Elite 70 Bevelled Casement O/A Sizes 622mm x 2230mm (CASE 1)			
	Type EB(w) - 34db			
← 622 → 2200 ← 622 → 3mm steel coupler 21.30 kg : 46.95 lb				
Specification		Chk		Chk
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing
Glazing Details & Apertures				
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec		
A1 - (510 x 2088)				

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

14	Elite 70 Bevelled Casement O/A Sizes 397mm x 2240mm (CASE 1)				
	Type EC(w) - 34db				
397 2210 397 3mm steel coupler 11.96 kg : 26.36 lb					
Specification		Chk		Chk	
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame	[]
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame	[]
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on	[]
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on	[]
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator	[]
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator	[]
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White	[]
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through	[]
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None	[]
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in	[]
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing	[]
Glazing Details & Apertures					
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec			
A1 - (285 x 2098)					

Frame colour: Anthracite grey grained (RAL7016) to external face & smooth white to base & internal face

Spring restrictor - X1no to each sash as stated. Flick override action to open & auto re-engage when sash closed. Limited to circa 90mm before override.

No trickle vents.

Overall U-Value is 1.4

Presume all windows are to receive pressed aluminium cills by others post our works. We have therefore allowed for 85mm cills on each window only as shown on section drawings. PLEASE CHECK/CONFIRM THIS

Most of the window openings have been changed to top hung as they exceed side hung maximum limitations, as previously advised. Easy clean hinges only available on side hung openings.

GLAZING

Drawing "5011-A" shows hatched areas where safety glazing is required. All non shaded areas are not safety glass, i.e. toughened or laminated.

See below glass specifications:

36db RW + Ctr = 6.8mm clear acoustic laminate / 10mm argon cavity / 10mm clear planitherm total plus (toughened as stated)

34db RW + Ctr = 10mm clear toughened / 12mm argon cavity / 6mm clear planitherm total plus (toughened as stated)

Please check the above glass is acceptable for barrier/guarding (if required) and for the building risk assessment.

Drawing "5001-A" states "solar control" glass but not provide any further information at all. We have therefore proposed to use planitherm total + glass which offers a G-Value of 0.6614 for the 36db glass specification and 0.6799 for the 34db glass specification.

NB - all sizes are from drawing "5011-A" less 10mm for standard tolerance - please check this is correct. JADE can NOT be responsible for any incorrect sizes. We therefore urge you to double check all sizes are correct before you approve the drawings, including all transom heights etc...

It is the customers (RP Tyson Construction Ltd) responsibility to ensure all details are correct on these drawings. Any errors (Jade's or otherwise) will be the customers responsibility and chargeable in full for replacements. These drawings herewith supersede any architect drawings or details when you approve them for manufacture. We therefore urge you to carefully check all details before you approve them for manufacture. Ask if in doubt before approval, which will action manufacture, after which no changes can be made.

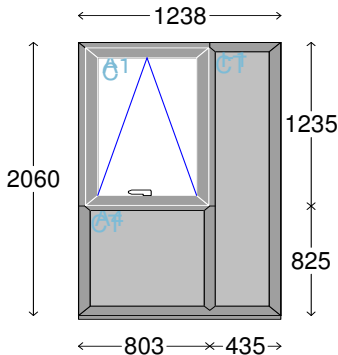
Total	£0.00
VAT @ 20.00%	£0.00
Total (Incl. VAT)	£0.00
Deposit	£0.00
Balance	£0.00

I confirm the details of this order are correct as detailed in this document

Signed _____ Dated _____

Order Acknowledgement

	Customer & Order Information	
	RP Tyson Construction Ltd	Job No : T6946-3-R2 Production Date : Delivery Date : Processed Date : 10-Jun-2020 Printed Date : 11-Jun-2020 Order Date : 10-Jun-2020
	Tel : Fax :	Job Spec Glazed / Supply & fix
Jade Windows 622 Bradford Road Batley West Yorkshire WF17 8HF Tel: 01924 438 277 Fax:		Job Reference : Kingsway-Level 3-Rev2

1	Elite 70 Bevelled Casement																																																																																																																
	Qty (4) O/A Sizes 1238mm x 2090mm (CASE 23 [Rev])																																																																																																																
	Type A-LHS-36db																																																																																																																
 153.85 kg : 339.18 lb																																																																																																																	
<table border="1"> <thead> <tr> <th>Specification</th> <th>Chk</th> <th>Chk</th> </tr> </thead> <tbody> <tr> <td>Frame (Head)</td> <td>B03 70mm Frame</td> <td>[]</td> <td>Frame (Cill)</td> <td>B03 70mm Frame</td> <td>[]</td> </tr> <tr> <td>Frame (Left jamb)</td> <td>B03 70mm Frame</td> <td>[]</td> <td>Frame (Right jamb)</td> <td>B03 70mm Frame</td> <td>[]</td> </tr> <tr> <td>Transom</td> <td>B10/11 66mm T/Z Section</td> <td>[]</td> <td>Mullion</td> <td>B10/11 66mm T/Z Section</td> <td>[]</td> </tr> <tr> <td>Sash (Head)</td> <td>B30/31 75mm T/Z Sash</td> <td>[]</td> <td>Sash (Cill)</td> <td>B30/31 75mm T/Z Sash</td> <td>[]</td> </tr> <tr> <td>Sash (Left jamb)</td> <td>B30/31 75mm T/Z Sash</td> <td>[]</td> <td>Sash (Right jamb)</td> <td>B30/31 75mm T/Z Sash</td> <td>[]</td> </tr> <tr> <td>Cill</td> <td>C085 85mm Bull Nose Cill</td> <td>[]</td> <td>Add-on (Head)</td> <td>No add-on</td> <td>[]</td> </tr> <tr> <td>Add-on (Cill)</td> <td>No add-on</td> <td>[]</td> <td>Add-on (Left jamb)</td> <td>No add-on</td> <td>[]</td> </tr> <tr> <td>Add-on (Right jamb)</td> <td>No add-on</td> <td>[]</td> <td>Ventilator (Head)</td> <td>No ventilator</td> <td>[]</td> </tr> <tr> <td>Ventilator (Sash)</td> <td>No ventilator</td> <td>[]</td> <td>Ventilator (Glass)</td> <td>No ventilator</td> <td>[]</td> </tr> <tr> <td>Ventilator (Frame)</td> <td>No ventilator</td> <td>[]</td> <td>Colour</td> <td>Grey Woodgrain on White</td> <td>[]</td> </tr> <tr> <td>Sash colour</td> <td>Grey Woodgrain on White</td> <td>[]</td> <td>Cill colour</td> <td>Grey Woodgrain on White</td> <td>[]</td> </tr> <tr> <td>Drainage</td> <td>Concealed/Base</td> <td>[]</td> <td>Georgian cruciform jo</td> <td>Mullions run through</td> <td>[]</td> </tr> <tr> <td>Bead type</td> <td>B62 Ovolo Step Bead</td> <td>[]</td> <td>Handle</td> <td>White Espag Handle</td> <td>[]</td> </tr> <tr> <td>Casement locking</td> <td>Mushroom espag</td> <td>[]</td> <td>Friction stay</td> <td>Std stay</td> <td>[]</td> </tr> <tr> <td>Restrictor</td> <td>Window Restrictor Spring-Latch</td> <td>[]</td> <td>Viewed from</td> <td>Viewed from outside</td> <td>[]</td> </tr> <tr> <td>Open in/out</td> <td>Open out</td> <td>[]</td> <td>Glazed in/out</td> <td>Glazed in</td> <td>[]</td> </tr> <tr> <td>Reinforcing rule</td> <td>Normal Reinforcing</td> <td>[]</td> <td>Reinforcing type</td> <td>Steel Reinforcing</td> <td>[]</td> </tr> <tr> <td>Tran/Mull joints</td> <td>Welded joint</td> <td>[]</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>			Specification	Chk	Chk	Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame	[]	Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame	[]	Transom	B10/11 66mm T/Z Section	[]	Mullion	B10/11 66mm T/Z Section	[]	Sash (Head)	B30/31 75mm T/Z Sash	[]	Sash (Cill)	B30/31 75mm T/Z Sash	[]	Sash (Left jamb)	B30/31 75mm T/Z Sash	[]	Sash (Right jamb)	B30/31 75mm T/Z Sash	[]	Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on	[]	Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on	[]	Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator	[]	Ventilator (Sash)	No ventilator	[]	Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator	[]	Colour	Grey Woodgrain on White	[]	Sash colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White	[]	Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through	[]	Bead type	B62 Ovolo Step Bead	[]	Handle	White Espag Handle	[]	Casement locking	Mushroom espag	[]	Friction stay	Std stay	[]	Restrictor	Window Restrictor Spring-Latch	[]	Viewed from	Viewed from outside	[]	Open in/out	Open out	[]	Glazed in/out	Glazed in	[]	Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing	[]	Tran/Mull joints	Welded joint	[]			
Specification	Chk	Chk																																																																																																															
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame	[]																																																																																																												
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame	[]																																																																																																												
Transom	B10/11 66mm T/Z Section	[]	Mullion	B10/11 66mm T/Z Section	[]																																																																																																												
Sash (Head)	B30/31 75mm T/Z Sash	[]	Sash (Cill)	B30/31 75mm T/Z Sash	[]																																																																																																												
Sash (Left jamb)	B30/31 75mm T/Z Sash	[]	Sash (Right jamb)	B30/31 75mm T/Z Sash	[]																																																																																																												
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on	[]																																																																																																												
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on	[]																																																																																																												
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator	[]																																																																																																												
Ventilator (Sash)	No ventilator	[]	Ventilator (Glass)	No ventilator	[]																																																																																																												
Ventilator (Frame)	No ventilator	[]	Colour	Grey Woodgrain on White	[]																																																																																																												
Sash colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White	[]																																																																																																												
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through	[]																																																																																																												
Bead type	B62 Ovolo Step Bead	[]	Handle	White Espag Handle	[]																																																																																																												
Casement locking	Mushroom espag	[]	Friction stay	Std stay	[]																																																																																																												
Restrictor	Window Restrictor Spring-Latch	[]	Viewed from	Viewed from outside	[]																																																																																																												
Open in/out	Open out	[]	Glazed in/out	Glazed in	[]																																																																																																												
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing	[]																																																																																																												
Tran/Mull joints	Welded joint	[]																																																																																																															
Glazing Details & Apertures																																																																																																																	
4-20-4 Clear s/c : 20mm Thermal Spacer Arqon Gas Filled A1 - (634 x 1066)																																																																																																																	
4-20-4 Clear s/c TUF : 20mm Thermal Spacer Arqon Gas Fillec A4 - (728 x 750) F1 - (360 x 1948)																																																																																																																	

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt Continued

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt Continued

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Frame colour: Anthracite grey grained (RAL7016) to external face & smooth white to base & internal face

Spring restrictor - X1no to each sash as stated. Flick override action to open & auto re-engage when sash closed. Limited to circa 90mm before override.

No trickle vents.

Overall U-Value is 1.4

Presume all windows are to receive pressed aluminium cills by others post our works. We have therefore allowed for 85mm cills on each window only as shown on section drawings. PLEASE CHECK/CONFIRM THIS

Most of the window openings have been changed to top hung as they exceed side hung maximum limitations, as previously advised. Easy clean hinges only available on side hung openings.

GLAZING

Drawing "5011-A" shows hatched areas where safety glazing is required. All non shaded areas are not safety glass, i.e. toughened or laminated.

See below glass specifications:

36db RW + Ctr = 6.8mm clear acoustic laminate / 10mm argon cavity / 10mm clear planitherm total plus (toughened as stated)

34db RW + Ctr = 10mm clear toughened / 12mm argon cavity / 6mm clear planitherm total plus (toughened as stated)

Please check the above glass is acceptable for barrier/guarding (if required) and for the building risk assessment.

Drawing "5001-A" states "solar control" glass but not provide any further information at all. We have therefore proposed to use planitherm total + glass which offers a G-Value of 0.6614 for the 36db glass specification and 0.6799 for the 34db glass specification.

NB - all sizes are from drawing "5011-A" less 10mm for standard tolerance - please check this is correct. JADE can NOT be responsible for any incorrect sizes. We therefore urge you to double check all sizes are correct before you approve the drawings, including all transom heights etc...

It is the customers (RP Tyson Construction Ltd) responsibility to ensure all details are correct on these drawings. Any errors (Jade's or otherwise) will be the customers responsibility and chargeable in full for replacements. These drawings herewith supersede any architect drawings or details when you approve them for manufacture. We therefore urge you to carefully check all details before you approve them for manufacture. Ask if in doubt before approval, which will action manufacture, after which no changes can be made.

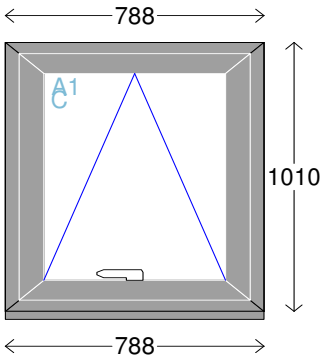
Total	£0.00
VAT @ 20.00%	£0.00
Total (Incl. VAT)	£0.00
Deposit	£0.00
Balance	£0.00

I confirm the details of this order are correct as detailed in this document

Signed _____ Dated _____

Order Acknowledgement

	Customer & Order Information	
	RP Tyson Construction Ltd	Job No : T6946-4-R2 Production Date : Delivery Date : Processed Date : 10-Jun-2020 Printed Date : 11-Jun-2020 Order Date : 10-Jun-2020
	Tel : Fax :	Job Spec Glazed / Supply & fix
Jade Windows 622 Bradford Road Batley West Yorkshire WF17 8HF Tel: 01924 438 277 Fax:		Job Reference : Kingsway-Level 4-Rev2

1	Elite 70 Bevelled Casement O/A Sizes 788mm x 1040mm (CASE 2)				
	Type F-34db				
 9.36 kg : 20.63 lb					
Specification	Chk	Chk			
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame	[]
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame	[]
Sash (Head)	B30/31 75mm T/Z Sash	[]	Sash (Cill)	B30/31 75mm T/Z Sash	[]
Sash (Left jamb)	B30/31 75mm T/Z Sash	[]	Sash (Right jamb)	B30/31 75mm T/Z Sash	[]
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on	[]
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on	[]
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator	[]
Ventilator (Sash)	No ventilator	[]	Ventilator (Glass)	No ventilator	[]
Ventilator (Frame)	No ventilator	[]	Colour	Grey Woodgrain on White	[]
Sash colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White	[]
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through	[]
Bead type	B62 Ovolo Step Bead	[]	Handle	White Espaq Handle	[]
Casement locking	Mushroom espag	[]	Friction stay	Std stay	[]
Restrictor	Window Restrictor Spring-Latch	[]	Viewed from	Viewed from outside	[]
Open in/out	Open out	[]	Glazed in/out	Glazed in	[]
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing	[]
Glazing Details & Apertures					
4-20-4 Clear s/c : 20mm Thermal Spacer Argon Gas Filled A1 - (582 x 804)					

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt

14	Elite 70 Bevelled Casement O/A Sizes 622mm x 2080mm (CASE 1)			
	Type ED(w) - 34db			
622 2050 622 3mm steel coupler 19.77 kg : 43.58 lb				
Specification		Chk		Chk
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing
Glazing Details & Apertures				
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec		
A1 - (510 x 1938)				

Z:\BM\EvoData\Jade Custom Reports\Order acknowledgement_Jade.rpt Continued

16	Elite 70 Bevelled Casement O/A Sizes 397mm x 2080mm (CASE 1)				
	Type EE(w) - 34db				
← 397 → 2050 ↑ ← 397 → 3mm steel coupler 11.05 kg : 24.35 lb					
Specification		Chk		Chk	
Frame (Head)	B03 70mm Frame	[]	Frame (Cill)	B03 70mm Frame	[]
Frame (Left jamb)	B03 70mm Frame	[]	Frame (Right jamb)	B03 70mm Frame	[]
Cill	C085 85mm Bull Nose Cill	[]	Add-on (Head)	No add-on	[]
Add-on (Cill)	No add-on	[]	Add-on (Left jamb)	No add-on	[]
Add-on (Right jamb)	No add-on	[]	Ventilator (Head)	No ventilator	[]
Ventilator (Glass)	No ventilator	[]	Ventilator (Frame)	No ventilator	[]
Colour	Grey Woodgrain on White	[]	Cill colour	Grey Woodgrain on White	[]
Drainage	Concealed/Base	[]	Georgian cruciform jo	Mullions run through	[]
Bead type	B62 Ovolo Step Bead	[]	Restrictor	None	[]
Viewed from	Viewed from outside	[]	Glazed in/out	Glazed in	[]
Reinforcing rule	Normal Reinforcing	[]	Reinforcing type	Steel Reinforcing	[]
Glazing Details & Apertures					
4-20-4 Clear s/c TUF : 20mm Thermal Spacer		Argon Gas Fillec			
A1 - (285 x 1938)					

Frame colour: Anthracite grey grained (RAL7016) to external face & smooth white to base & internal face

Spring restrictor - X1no to each sash as stated. Flick override action to open & auto re-engage when sash closed. Limited to circa 90mm before override.

No trickle vents.

Overall U-Value is 1.4

Presume all windows are to receive pressed aluminium cills by others post our works. We have therefore allowed for 85mm cills on each window only as shown on section drawings. PLEASE CHECK/CONFIRM THIS

Most of the window openings have been changed to top hung as they exceed side hung maximum limitations, as previously advised. Easy clean hinges only available on side hung openings.

GLAZING

Drawing "5011-A" shows hatched areas where safety glazing is required. All non shaded areas are not safety glass, i.e. toughened or laminated.

See below glass specifications:

36db RW + Ctr = 6.8mm clear acoustic laminate / 10mm argon cavity / 10mm clear planitherm total plus (toughened as stated)

34db RW + Ctr = 10mm clear toughened / 12mm argon cavity / 6mm clear planitherm total plus (toughened as stated)

Please check the above glass is acceptable for barrier/guarding (if required) and for the building risk assessment.

Drawing "5001-A" states "solar control" glass but not provide any further information at all. We have therefore proposed to use planitherm total + glass which offers a G-Value of 0.6614 for the 36db glass specification and 0.6799 for the 34db glass specification.

NB - all sizes are from drawing "5011-A" less 10mm for standard tolerance - please check this is correct. JADE can NOT be responsible for any incorrect sizes. We therefore urge you to double check all sizes are correct before you approve the drawings, including all transom heights etc...

It is the customers (RP Tyson Construction Ltd) responsibility to ensure all details are correct on these drawings. Any errors (Jade's or otherwise) will be the customers responsibility and chargeable in full for replacements. These drawings herewith supersede any architect drawings or details when your approve them for manufacture. We therefore urge you to carefully check all details before you approve them for manufacture. Ask if in doubt before approval, which will action manufacture, after which no changes can be made.

Total	£0.00
VAT @ 20.00%	£0.00
Total (Incl. VAT)	£0.00
Deposit	£0.00
Balance	£0.00

I confirm the details of this order are correct as detailed in this document

Signed _____ Dated _____