



Quotation Number :		Project Code :	
Project Name :		Customer :	
Item Reference: :		Date: :	Wednesday, December 8, 2021
Fan Code	45JM/16/4/5/30	Performance data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with ISO 5801 and is specifically applicable for Ducted installations. When an electronic controller is incorporated, enhanced motor noise can occur - particularly when the operating speed is well below maximum. FWL therefore recommend using an auto transformer speed controller for noise sensitive applications. Bifurcateds are Erp exempt when used continuously at >100C. They are not for use in the EEA at lower temperatures.	
Fan Diameter / Size	450 Size / mm		
Blades	5		
Installation Type / Form of Running	C / B (Horizontal)		
Fan Casing	Long		
Motor Frame	BT9 [Class F]	Acoustic data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with BS 848 Pt 2, 1985 / ISO 5136 under Ducted conditions. The LpA figure provided is the overall Inlet sound pressure level calculated at the specified distance, under spherical, free field conditions. Breakout levels stated are estimated from induct sound power levels and are provided for guidance.	
Motor Rating	0.320 kW		
Full Load Current	2.2 A		
Starting Current	5 A		
Motor Mounting	Pad		
Electrical Supply	220-240 Volts 50 Hz 1 Phase	Acoustic figures for adjusted running speeds have been interpolated and are for reference only.	
Start Type	DOL		
Motor Winding	Standard		
Enclosure	Standard All		
ErP [FMEG] Rating	N 43 (ErP Compliant)		
ErP [FMEG] Target	N 40	This Offer is made subject to the latest version of our A100-19 Terms and Conditions, a copy of which can be made available on request. Our lead times will be re-confirmed on receipt of manufacturing release and may be subject to change.	
FMEG Blade Angle [Range]	24° [24° - 30°]		
Measurement Category	C (Static)		
VSD	N		
Fan + Motor Efficiency	34.9% (0.97 m³/s @ 141 Pa)		
Motor Input Power (ErP)	0.393 kW		
Air Density	1.2 kg/m³ / 20 °C / 0 m / 40% RH		
Smoke Venting	Non Smoke Venting		
Product Number	EJ461466		

Description	Qty
Fan EJ461466 - 45JM/16/4/5/30	1
Accessories Thermostat	1
Optional Controllers & Sensors	
 EEDS (Switched - Electronic) [EA900103]	
Optional Accessories	
 Mounting Feet [897723]	
 Rubber AV Mounts [AS035471]	
 Matching Flange [501353]	
 Flexible Connector [414868]	

Quotation Number :
Project Name :
Item Reference: :



Project Code :
Customer :
Date: : Wednesday, December 8, 2021

Fan Code	45JM/16/4/5/30
Fan Diameter / Size	450 Size / mm
Blades	5
Installation Type / Form of Running	C / B (Horizontal)
Fan Casing	Long

Motor Frame	BT9 [Class F]
Motor Rating	0.320 kW
Full Load Current	2.2 A
Starting Current	5 A
Motor Mounting	Pad
Electrical Supply	220-240 Volts 50 Hz 1 Phase
Start Type	DOL
Motor Winding	Standard
Enclosure	Standard All

ErP [FMEG] Rating	N 43 (ErP Compliant)
ErP [FMEG] Target	N 40
FMEG Blade Angle [Range]	24° [24° - 30°]
Measurement Category	C (Static)
VSD	N
Fan + Motor Efficiency	34.9% (0.97 m³/s @ 141 Pa)
Motor Input Power (ErP)	0.393 kW

Air Density	1.2 kg/m ³ / 20 °C / 0 m / 40% RH
Smoke Venting	Non Smoke Venting
Product Number	EI461466

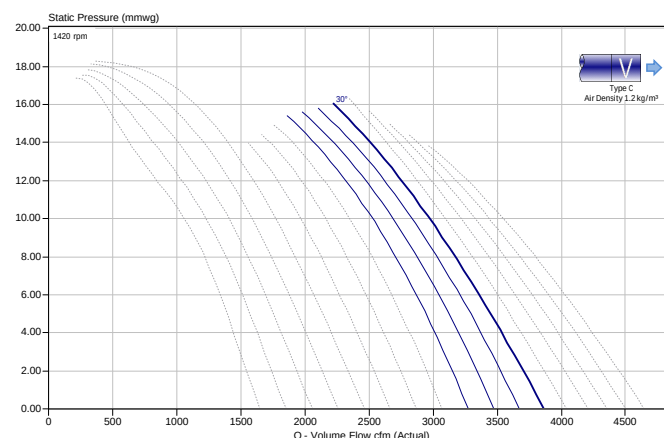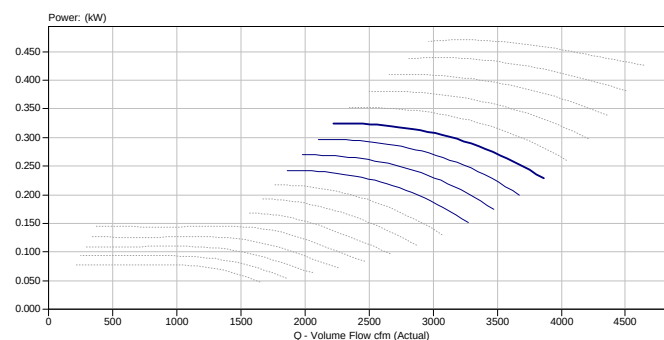

This Offer is made subject to the latest version of our A100-19 Terms and Conditions, a copy of which can be made available on request. Our lead times

Description		Qty
Fan EJ461466 - 45JM/16/4/5/30		1
Accessories Thermostat		1
Optional Controllers & Sensors	Optional Accessories	
 EEDS (Switched - Electronic) [EA900103]	 Mounting Feet [897723]  Rubber AV Mounts [AS035471]   Matching Flange [501353]   Flexible Connector [414868]	



Quotation Number :
Project Name :
Item Reference: :


Project Code :
Customer :
Date: : Wednesday, December 8, 2021

Fan Code 45JM/16/4/5/30
Fan Diameter / Size 450 Size / mm
Blades 5
Installation Type / Form of Running C / B (Horizontal)
Fan Casing Long

Motor Frame BT9 [Class F]
Motor Rating 0.320 kW
Full Load Current 2.2 A
Starting Current 5 A
Motor Mounting Pad
Electrical Supply 220-240 Volts 50 Hz 1 Phase
Start Type DOL
Motor Winding Standard
Enclosure Standard All

ErP [FMEG] Rating N 43 (ErP Compliant)
ErP [FMEG] Target N 40
FMEG Blade Angle [Range] 24° [24° - 30°]
Measurement Category C (Static)
VSD N
Fan + Motor Efficiency 34.9% (0.97 m³/s @ 141 Pa)
Motor Input Power (ErP) 0.393 kW

Air Density 1.2 kg/m³ / 20 °C / 0 m / 40% RH
Smoke Venting Non Smoke Venting
Product Number EJ461466


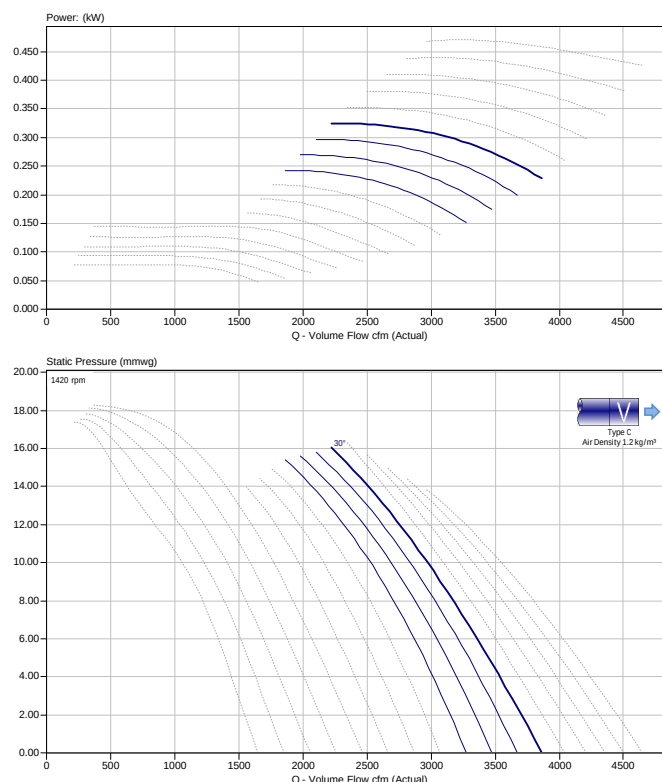


will be re-confirmed on receipt of manufacturing release and may be subject to change.

Description		Qty
Fan EJ461466 - 45JM/16/4/5/30		1
Accessories Thermostat		1
Optional Controllers & Sensors		
 EEDS (Switched - Electronic) [EA900103]		Optional Accessories
		 Mounting Feet [897723]
		 Rubber AV Mounts [AS035471]
		 Matching Flange [501353]
		 Flexible Connector [414868]



Quotation Number	:	Project Code	:
Project Name	:	Customer	:
Item Reference:	:	Date:	: Wednesday, December 8, 2021
		Fan Code	: 45JM/16/4/5/30

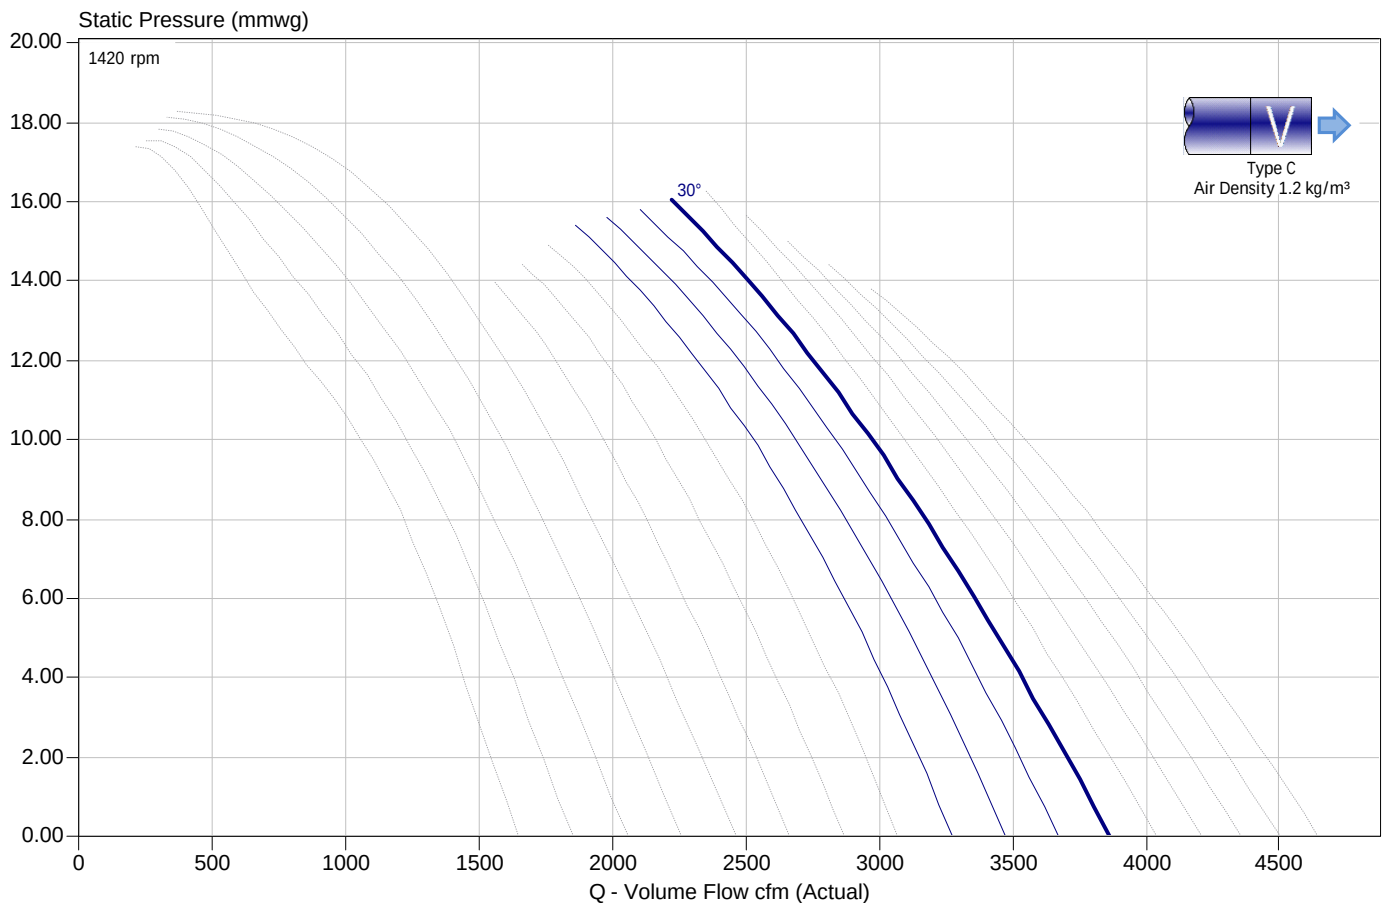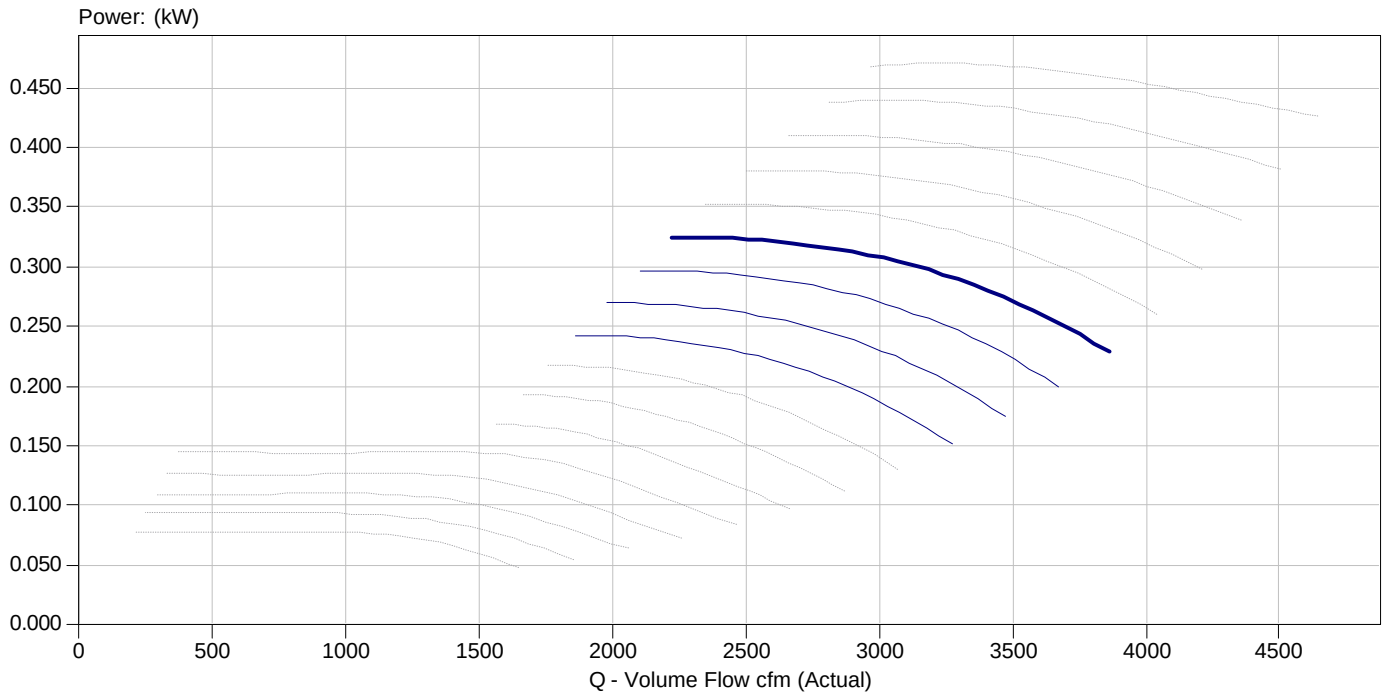




Quotation Number :
Project Name :
Item Reference :

Fan Code : 45JM/16/4/5/30
Customer :
Date : Wednesday, December 8, 2021

C (3Ph / 1Ph)	375 / 330
E	2.5
K (3Ph / 1Ph)	289 / 245
Weight (kg)	26

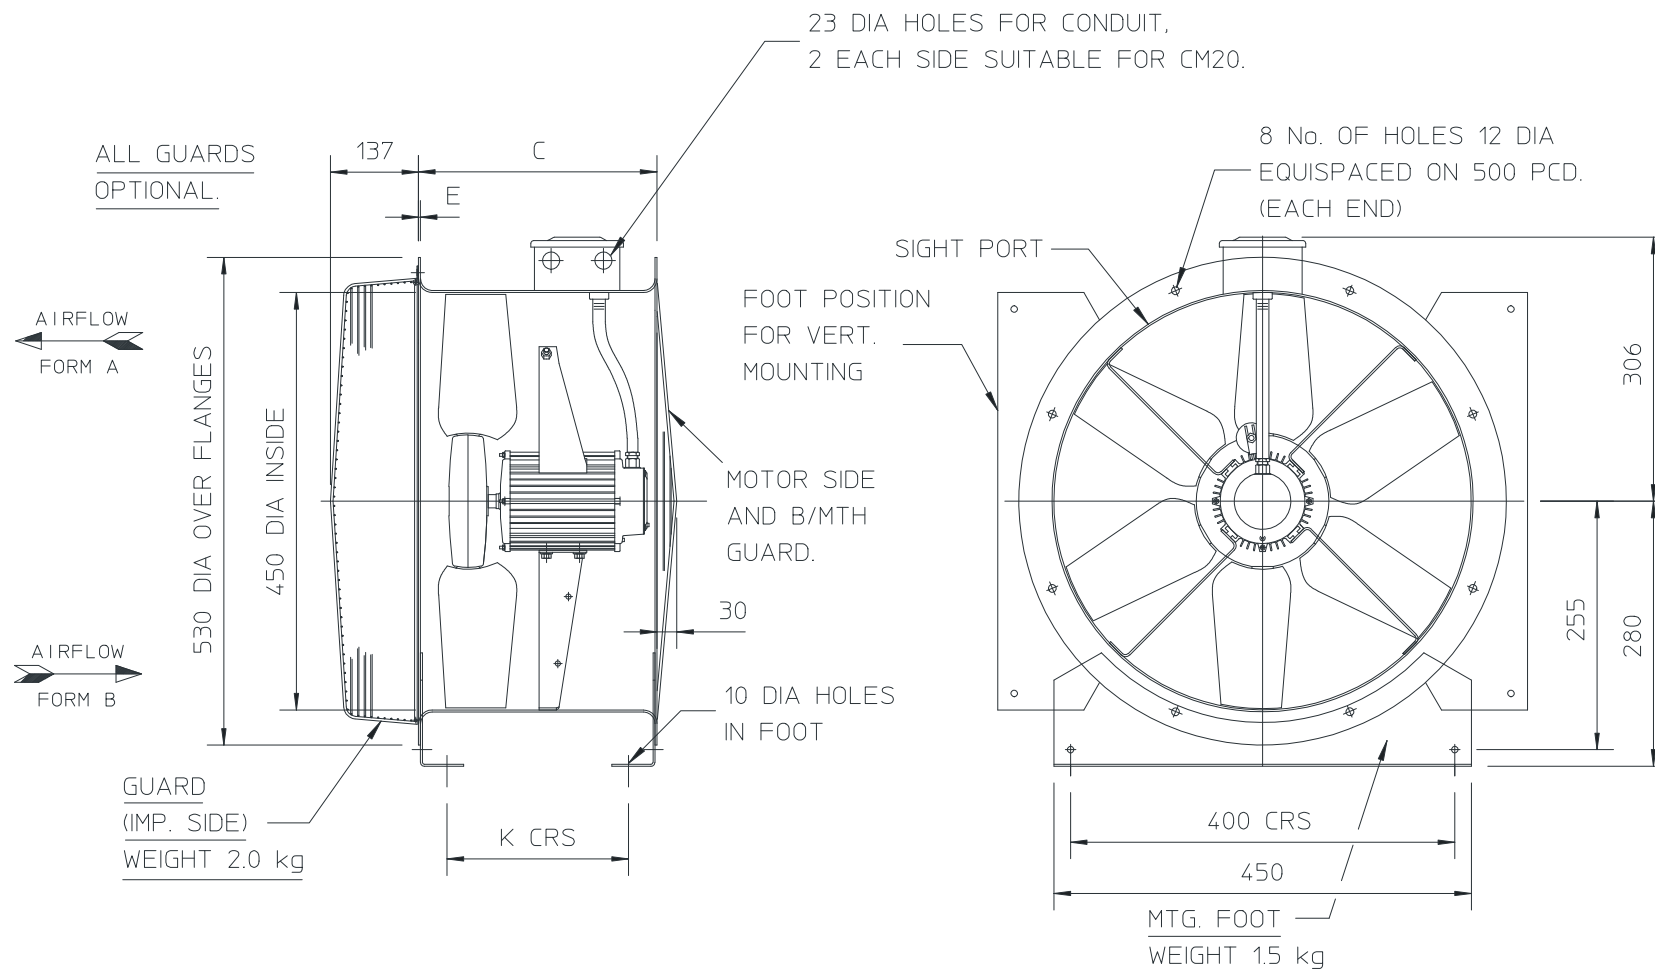

Notes : Dimensions shown in mm / Weight in kg

Reference:D269015

This drawing shows dimensions that should be used as a guide only and are subject to change. Certified drawings are available on request.

Unit E1 Longford Trading Estate
Thomas Street, Stretford, M320JT
Tel: 01618641777 Fax: 01618642777

Website: <http://www.nfan.co.uk/>
Email: kylejr@nfan.co.uk
Copyright Fläkt Group 2003 - 2020