


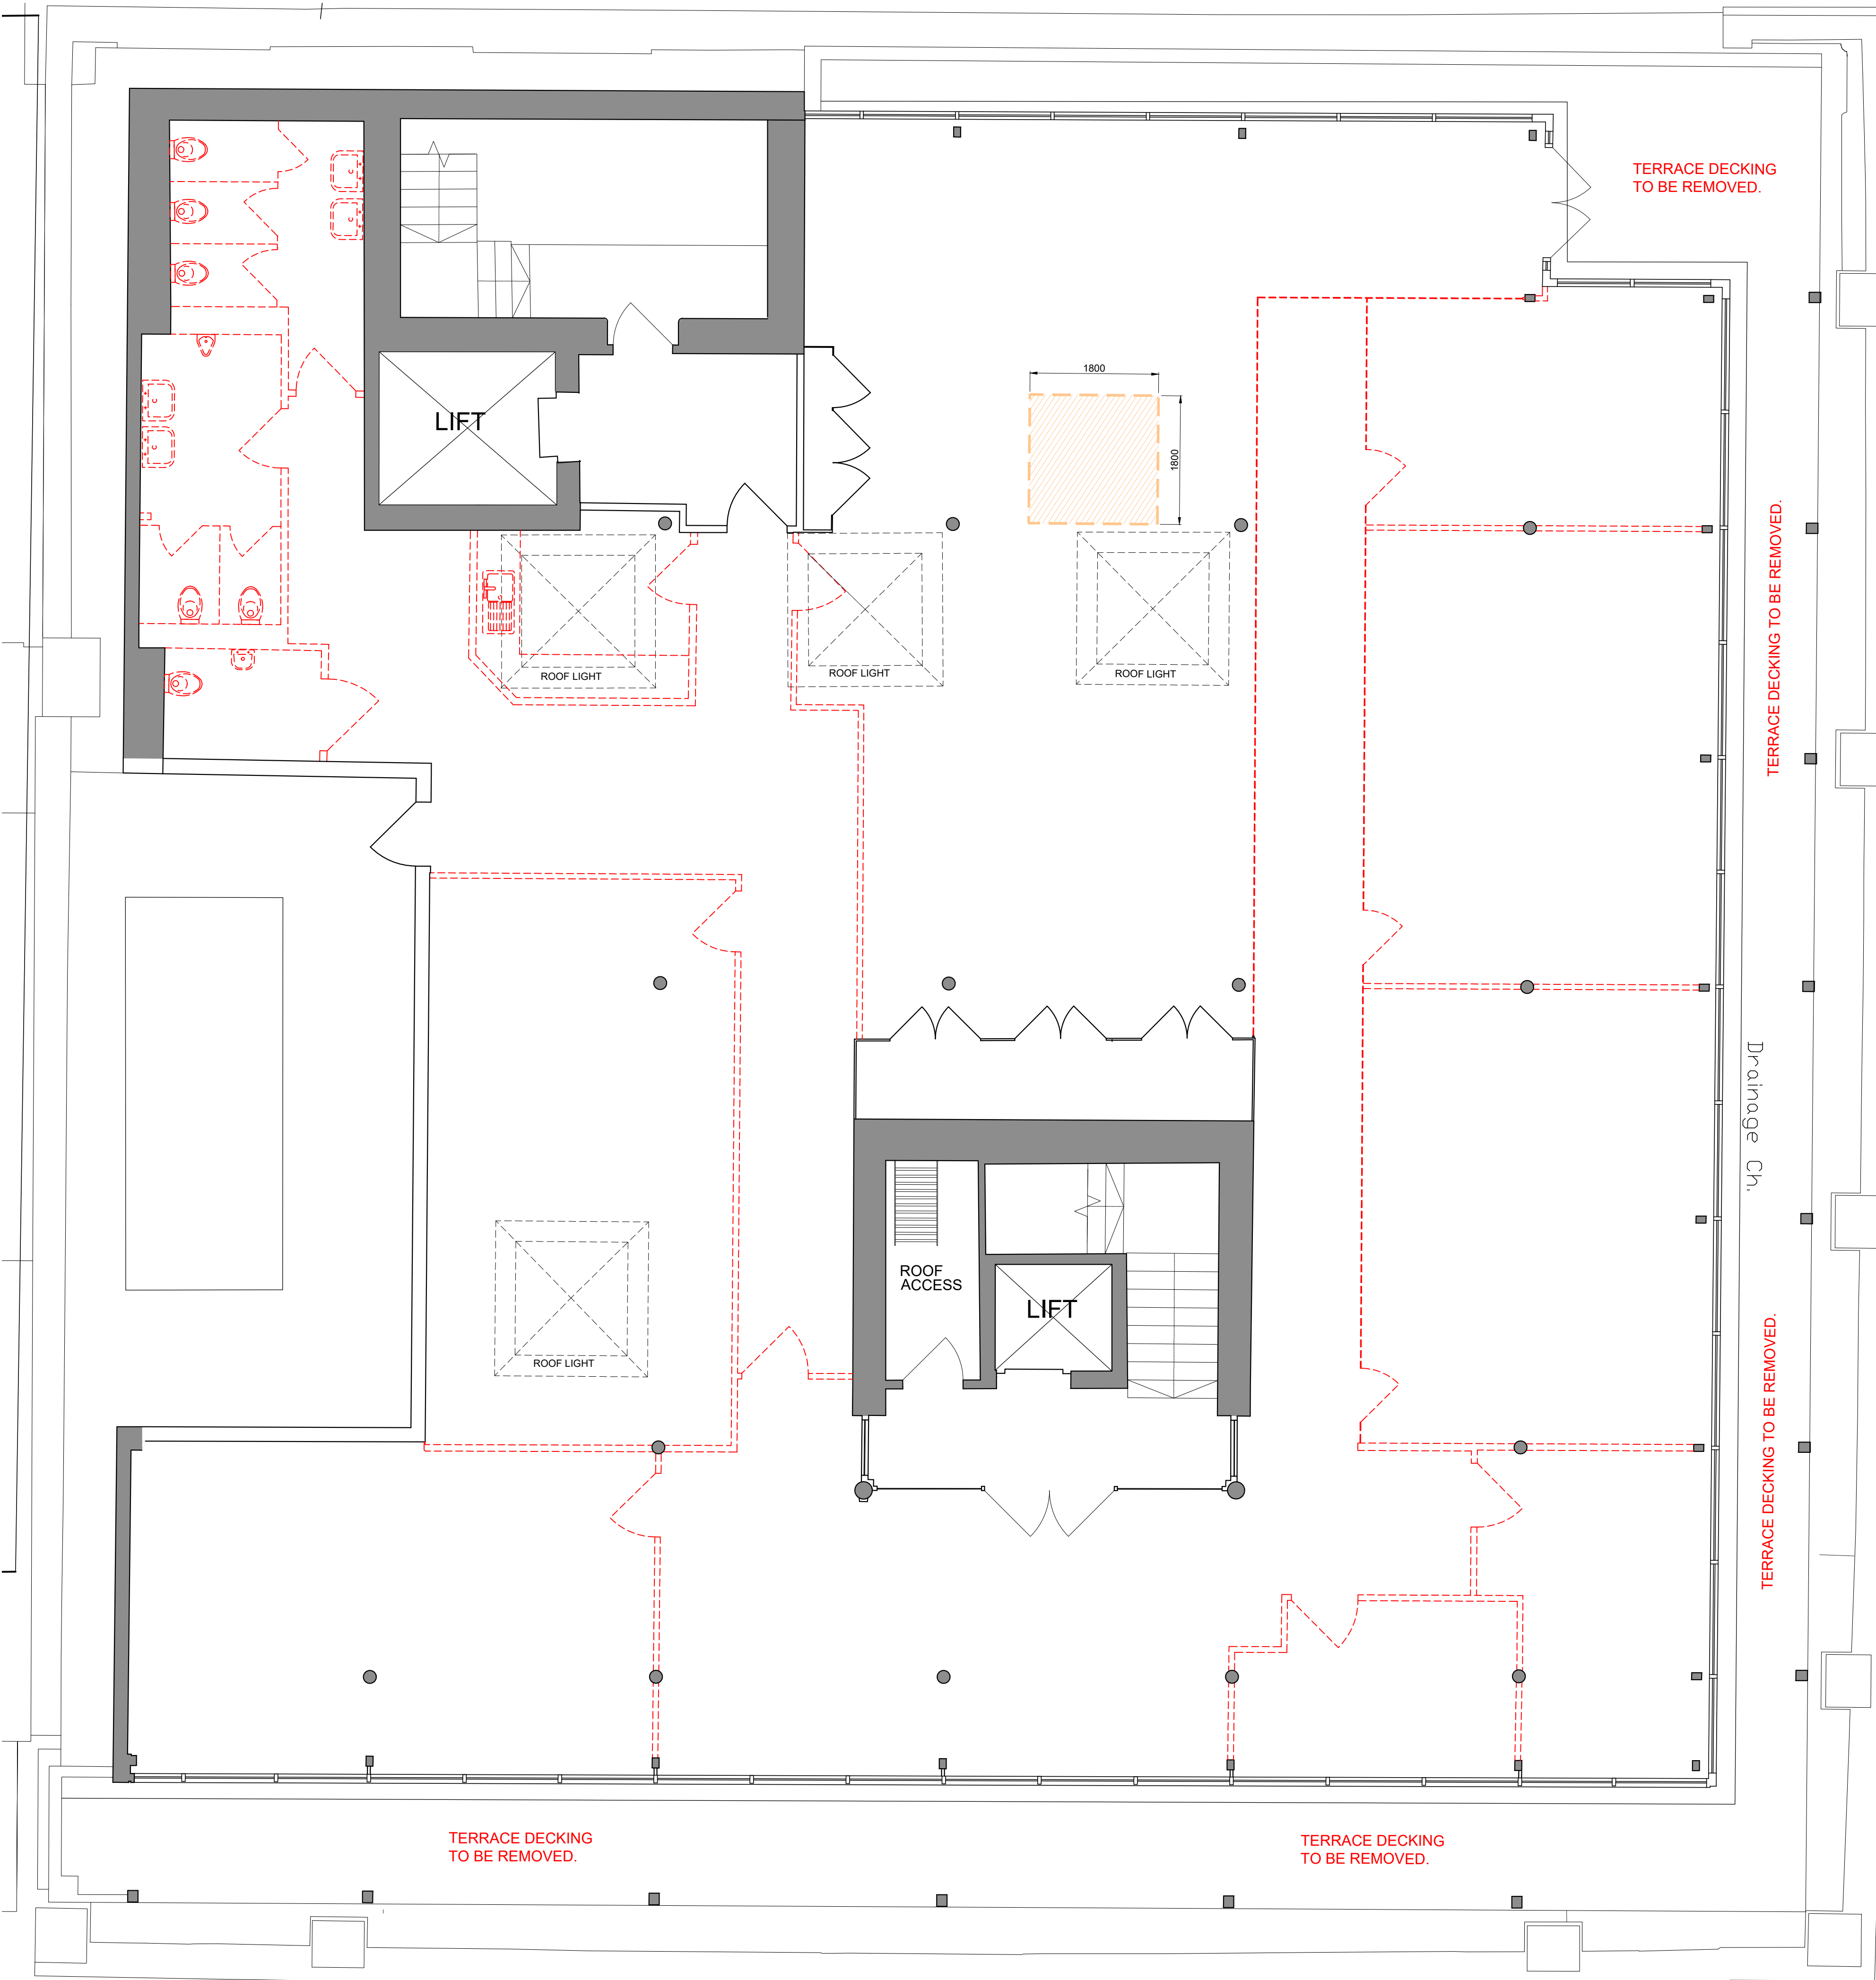

SOFT STRIP-OUT & DOWNTAKINGS KEY:

- INDICATES THE EXTENT OF DOWNTAKINGS TO BE STRIPPED OUT.
- INDICATES THE EXTENT OF INTRUSIVE WORKS TO BE OPENED UP FOR REVIEW AND INSPECTION BY THE DESIGN TEAM.
- UNLESS OTHERWISE NOTED ON PLAN AREA OF RAISED ACCESS FLOOR TO BE LIFTED AND AREA OF PLASTERBOARD CEILING TO BE REMOVED
- INDICATES AREA OUT OF SCOPE AND EXCLUDED FROM SOFT-STRIP OUT WORKS.

SCOPE OF WORKS: SOFT STRIP OUT & DOWNTAKINGS

CAT A REFURBISHMENT:
THE PROPOSALS COMPRISE THE REMODELLING & REFURBISHMNET OF THE COMMON PARTS AND OFFICE SUITES AT FREETRADE EXCHANGE BUILDING, MANCHESTER, WITH THE FOLLOWING HIGH LEVEL SCOPE.

- TOILET CORE:
- FULL STRIP OUT OF ALL FIXTURES & FITTINGS INCLUDING ALL SANITARYWARE, CUBICLE SYSTEMS AND FINISHES.
 - FULL STRIP OUT OF SUSPENDED CEILING SYSTEM.
- LIFT LOBBY & STAIR CORES:
- NO SOFT STRIP OUT WORKS TO CORE AREAS INCLUDE LIFT CARS & FINISHES.

- OFFICE FLOOR PLATE:
- FULL STRIP OUT OF ALL NON-LOAD BEARING PARTITIONS AND WALL FINISHES ASSOCIATED WITH THE TENANT FIT-OUT.
 - FULL STRIP OUT OF PLASTERBOARD BULKHEADS ASSOCIATED WITH TENANT FIT-OUT.
 - FULL STRIP OUT OF ALL FLOOR FINISHES AND ASSOCIATED SUBSTRATES, INCLUDING THE REMOVAL OF THE RAISED ACCESS FLOOR SYSTEM AND FLOOR BOXES.
 - ALL FIXTURES AND FITTINGS ASSOCIATED WITH THE TENANT FIT-OUT INCLUDING ALL KITCHEN APPLIANCES, BESPOKE JOINERY AND SANITARY FITTINGS AND ANY TENANT IT SERVICES (SECURITY PANELS, CABLING, CABINETS, CONTAINMENT ETC)
 - REMOVE ALL BLINDS.
 - ALL INTERNAL DOORS TO BE REMOVED AND REPLACED.
 - RISER DOORS TO BE RETAINED.

- EXTERNAL WORKS:
- REMOVE TERRACE DECKING AROUND THE PERIMETER.
 - ALL DEBRIS & VEGETATION TO BE REMOVED FROM EXTERNAL AREAS.

- M&E SERVICES:
- ALL WALLS TO BE REMOVED CONTAINING ELECTRICAL SERVICES WILL NEED SAFELY ISOLATING AND REMOVING.
 - ANY WORKS THAT DISTURB INCOMING GAS OR INTERNAL GAS ROUTES WILL REQUIRE THE SYSTEM ISOLATING AND PURGING BEFOREHAND.
 - ANY WATER PIPES THAT WILL BE DISTURBED WILL REQUIRE ISOLATING AND DRAINING.
 - ALL REFRIGERANT GAS SERVICES WILL REQUIRE SAFE ISOLATION AND REMOVAL FROM SITE.

Existing layouts are taken from third party drawings and are not verified by M.L.A. Extent of strip-out should be reviewed and confirmed on site by the appointed contractor to ensure they are comfortable with the proposed scope. Specifically, the strip out scope of all tenant fit-outs should be reviewed on site.

1:50 @A1			
0	0.5	1	1.5
2	2.5m		
rev.	date	details	by
A	29.10.21	Issued for Information	BC
B	10.02.22	Issued for Information. Issued for Planning	BC

MLA

MICHAEL LAIRD ARCHITECTS

5 Forres Street, Edinburgh EH3 6DE
T 0131 226 6991 F 0131 226 2771
mail@michaellaird.co.uk

Fretrade Exchange Refurbishment
Clearbell
27 Peter Street, Manchester, M2 5GB

drawing title			
Soft Strip-out & Intrusive works Fifth Floor Existing Layout with Duntakings			
scale	date	drawn	format
1:50	Oct 2021	BC	a1
status			
Information			
drawing number			revision
CFM.AR(10)008			B