T. +44 (0) 1709 374898
E. sales@asdlighting.com
W. asdlighting.com

# SEL/B4LED1500-M1

Stealth Elite LED 1500, Wide Beam Angle, Black, Clear Diffuser



## Range Information

A robust high performance exterior luminaire.

## Range Specification

- Wall mount.
- Black and titanium colour finishes available.
- Flood, wide and T beam angle distribution available.
- Die cast aluminium (powder coated).
- Clear / opal diffuser options.
- DALI Driver as standard (requires different wiring than standard product in order to use DALI).
- 10KV Surge Protection.
- Integrated Over Voltage Protection.
- Standby Power less than 0.5W.
- High operation temperature version available.
- ULOR as low as 0.6%.
- Standard specification paint finish passes 1000 hours Salt Spray Test in accordance with BS EN ISO 9227:2006.
- > 100k hrs L90-B10.
- Latest generation of LED chips.
- IP65 / IK10.
- 5 Year LED guarantee.

## Range Options

- Emergency option available.
- PIR / Photocell options available.
- Step Dim (Additional PIR required).
- Presence Detection (Additional PIR required).
- CLO.
- Astro Dim (Additional Photocell required).
- Black - SEL/B


• Titanium - SEL/X

## Technical Information

| | |
|---|---|
| **Colour** | Black |
| **Diffuser** | Clear |
| **CCT** | 4000K |
| **Delivered Lumens** | 1470lm |
| **System Power** | 12.8W |
| **Efficacy** | 114.8lm/W |

## Size

| | |
|---|---|
| **Width** | 330mm |
| **Depth** | 176mm |
| **Height** | 343mm |

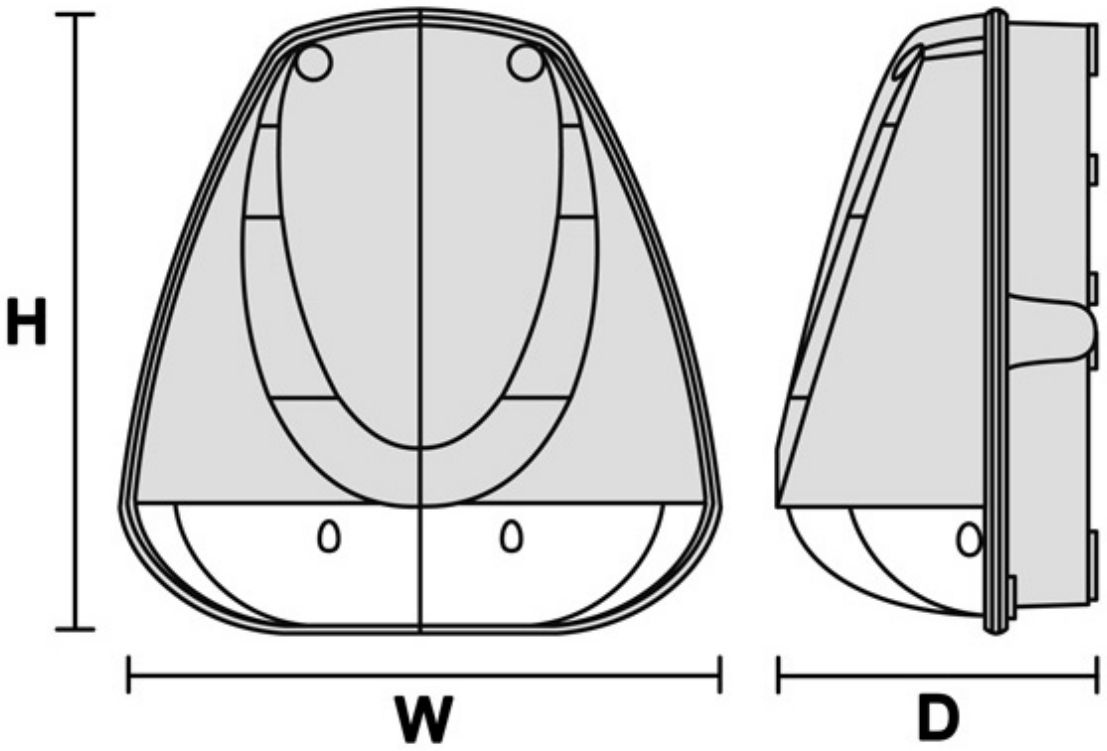


ASD Lighting
Mangham Road, Barbot Hall Industrial Estate, Rotherham, S61 4RJ, United Kingdom
T. +44 (0) 1709 374898 | E. sales@asdlighting.com | W. asdlighting.com