

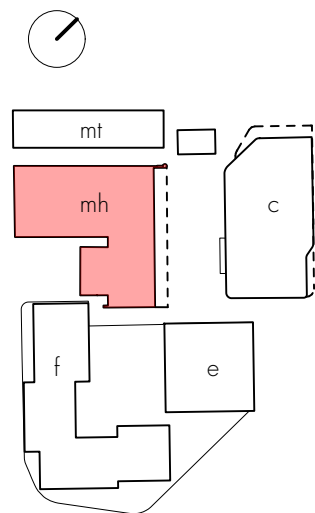


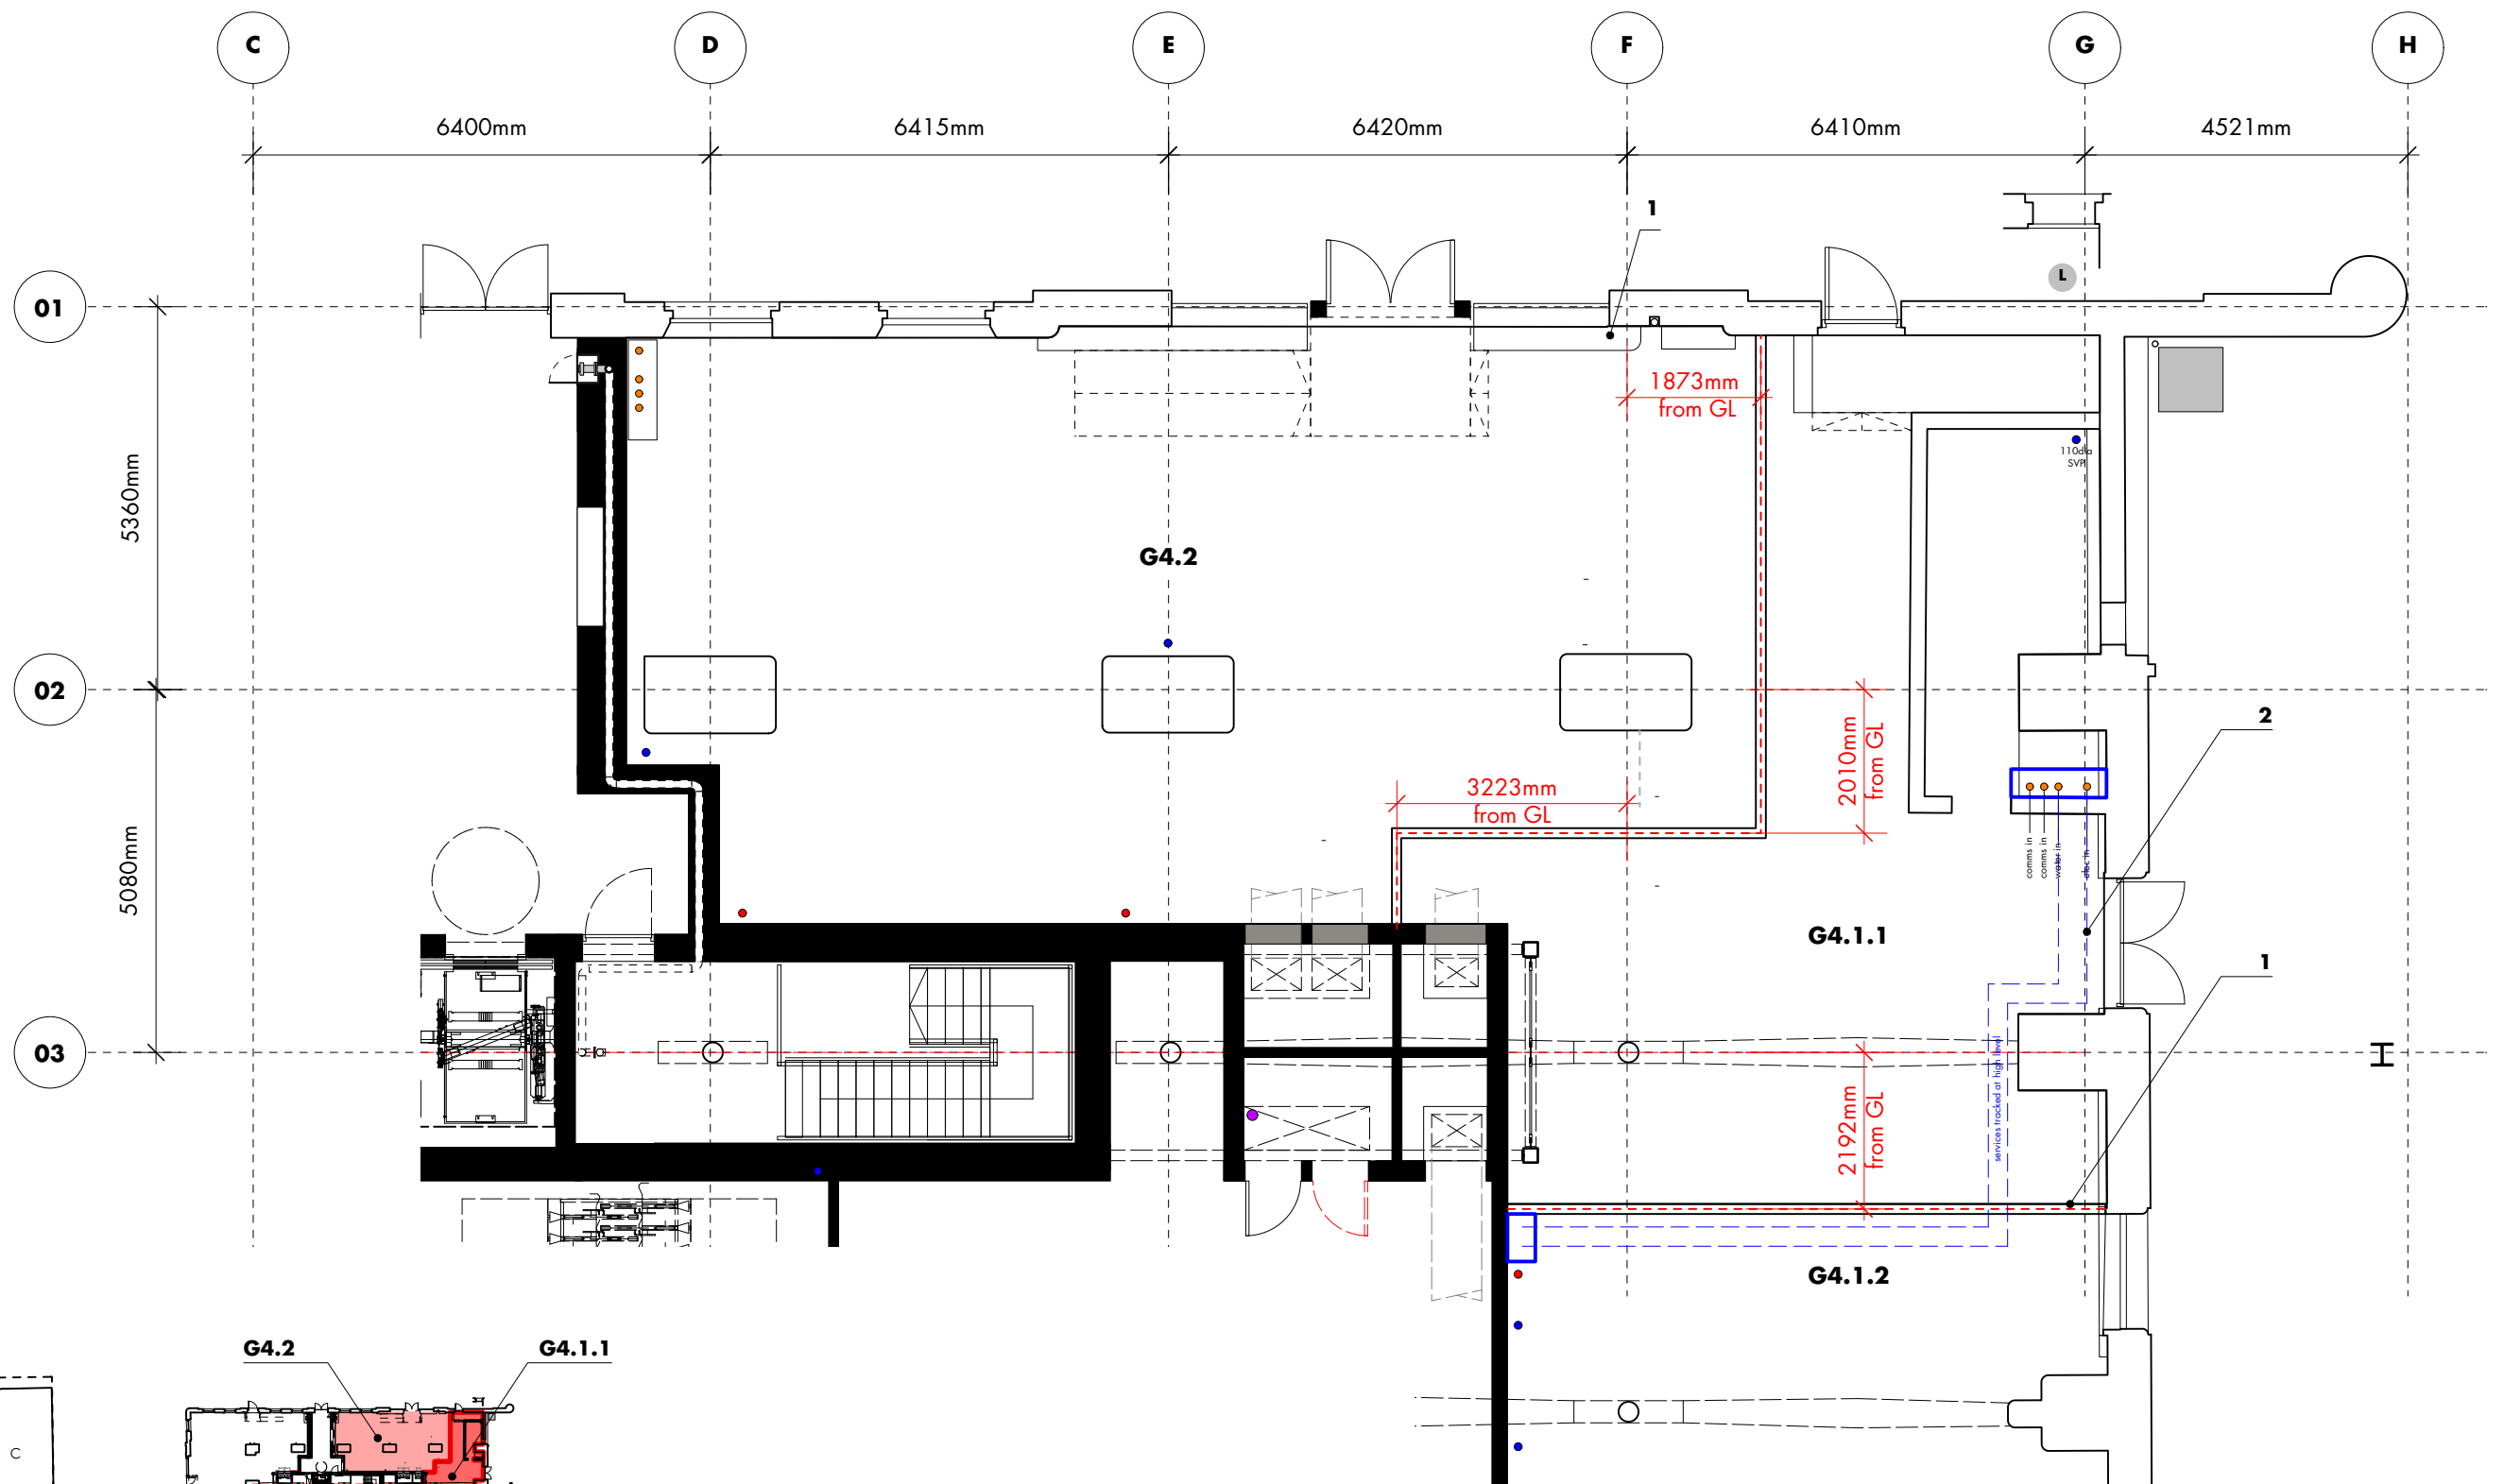

development key plan

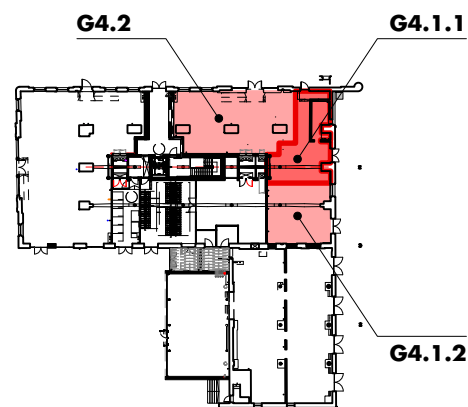

building key plan

1. separating partition

- British gypsum system reference A206A292
- fire performance - 60min integrity & insulation
- acoustic requirements - DnT,w 50 dB, (lab performance of Rw 59 dB)
- allow for localised destructive works to install cavity barrier in ceiling void and potential head support to partition
- allow for 18mm plywood pattress between studs for tenant fit-out

2. services

- additional service routes for electrical and water supplies to be rooted from pre-installed location to subdivided unit (G4.1.2) @ high level

note • setting out from c/l of partition

Mount Anvil

kampus listed • minto + turner • unit G4 subdivision works

SK 550 • rev - • 19 01 22 • various @ A3

shedkm