


External Signs


Option B - New Brand Refit - ATM Surround - Face Illuminated

Complete ATM Surround replacement.

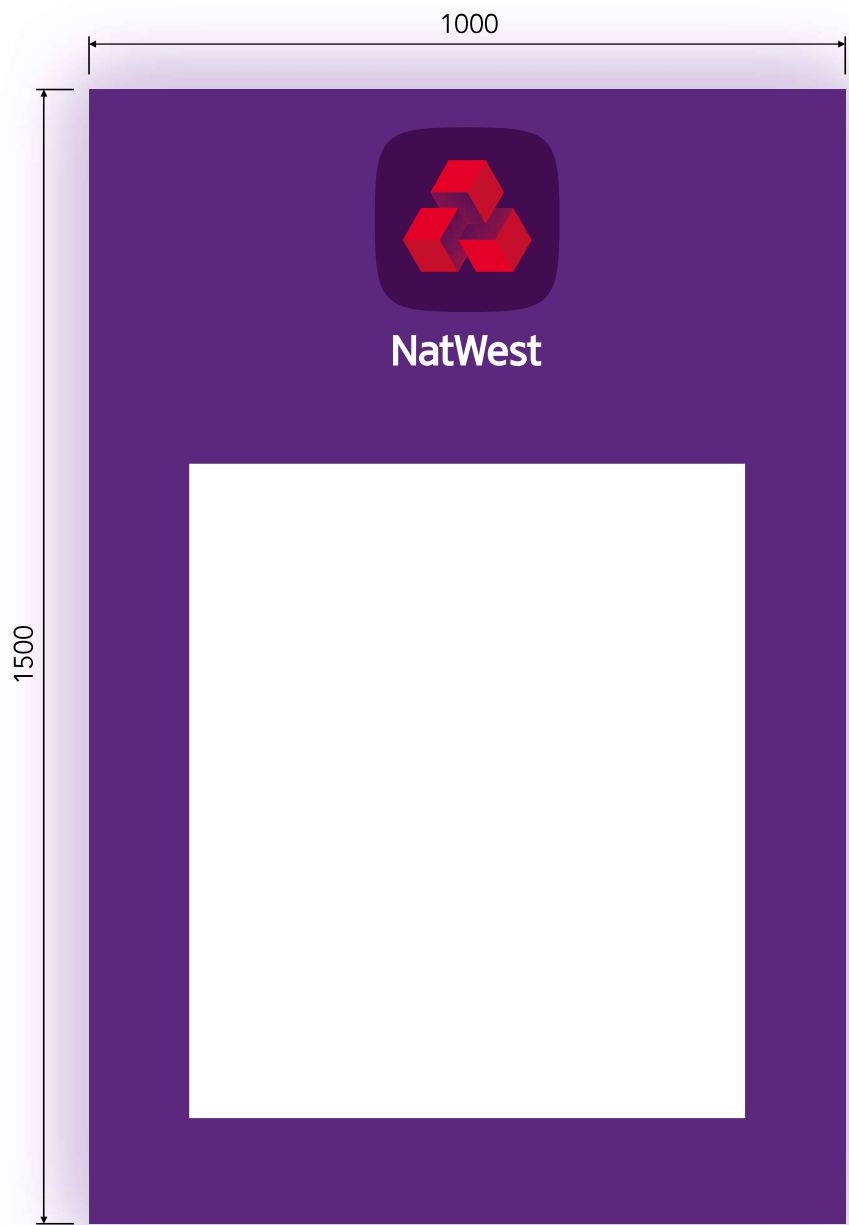


1500mm (h) Standard ATM Surround

FACE 1:10

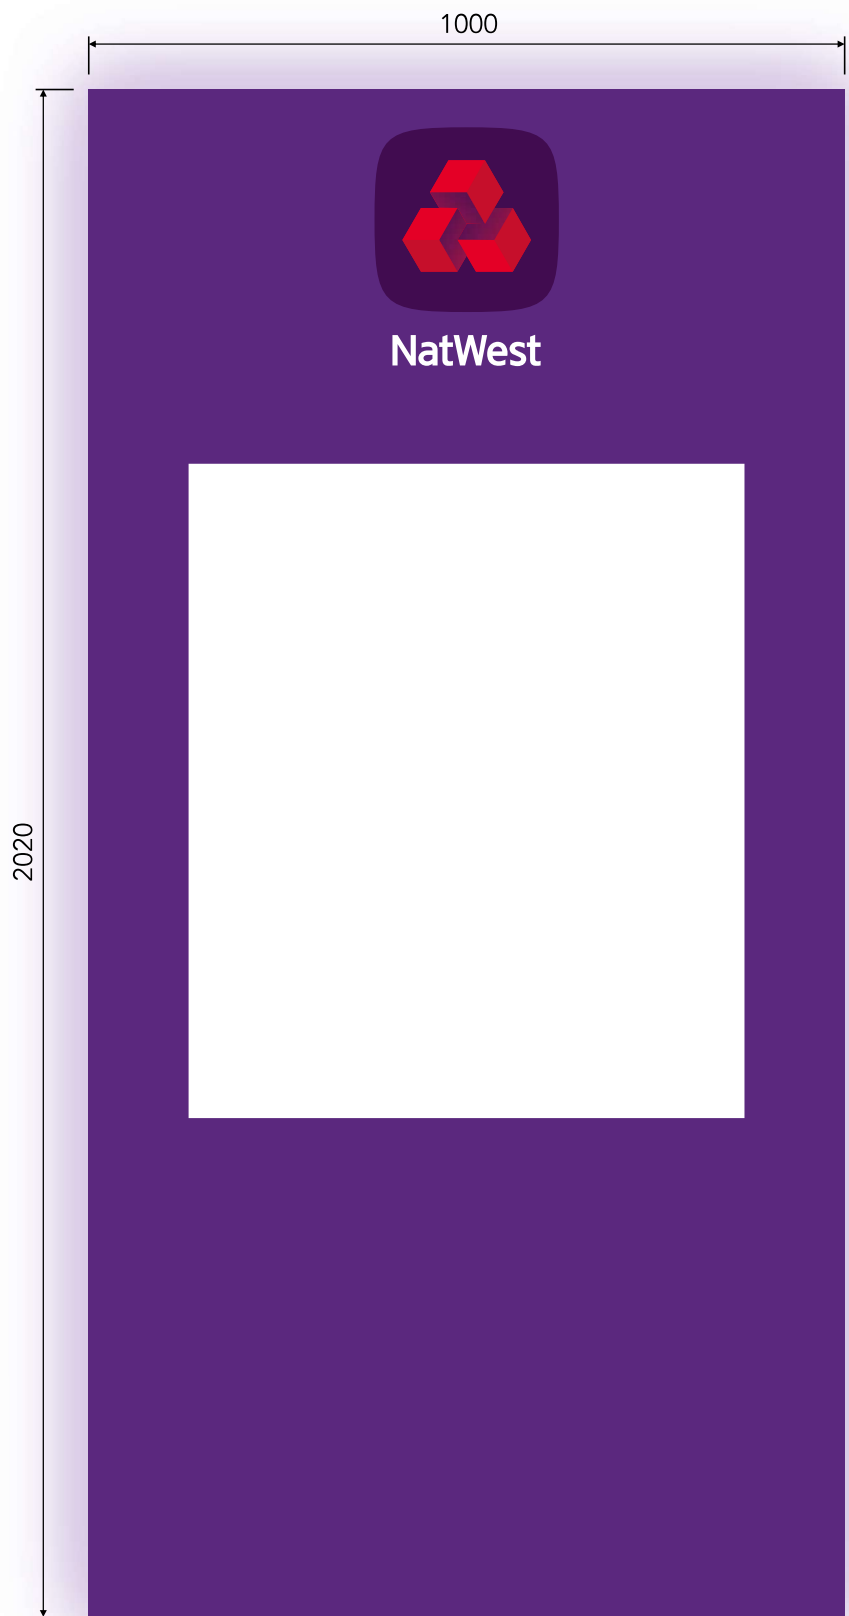


2000mm (h) Full ATM Surround

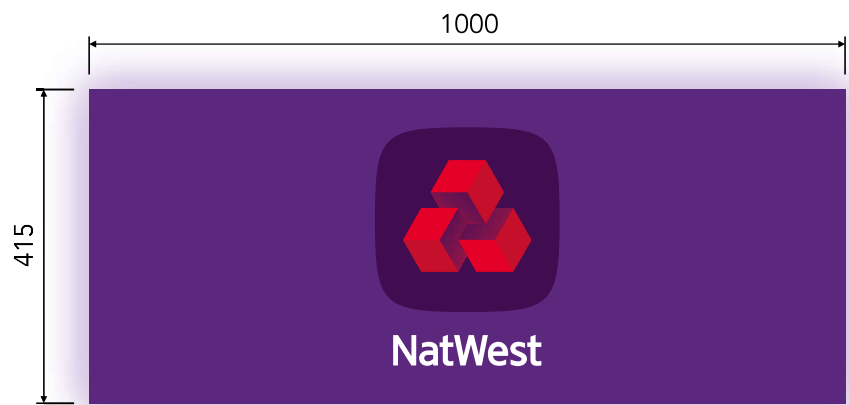


415mm (h) ATM Tablet

External Signs


Option B - New Brand Refit - ATM Surround - Detail based on R&D samples

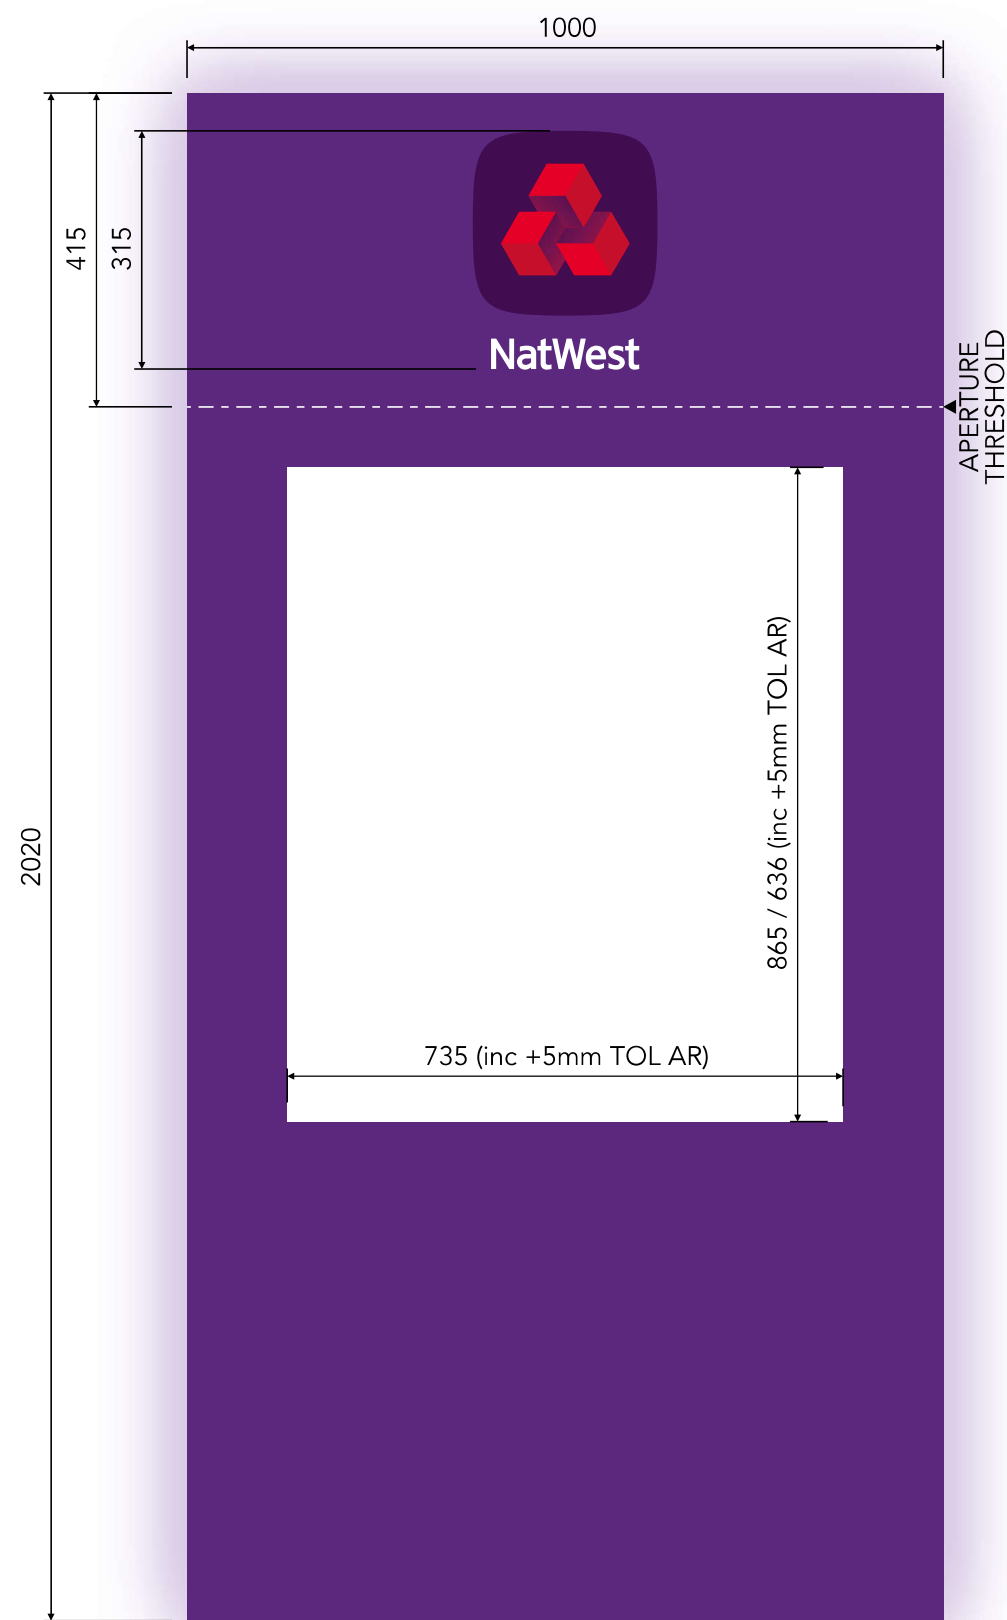


FACE 1:10

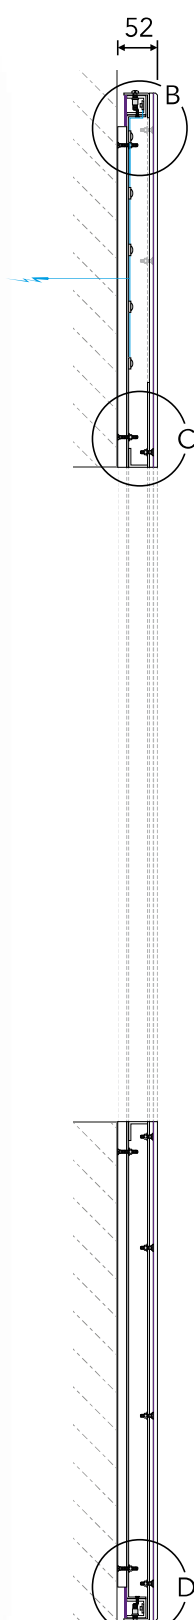


A-A 1:10

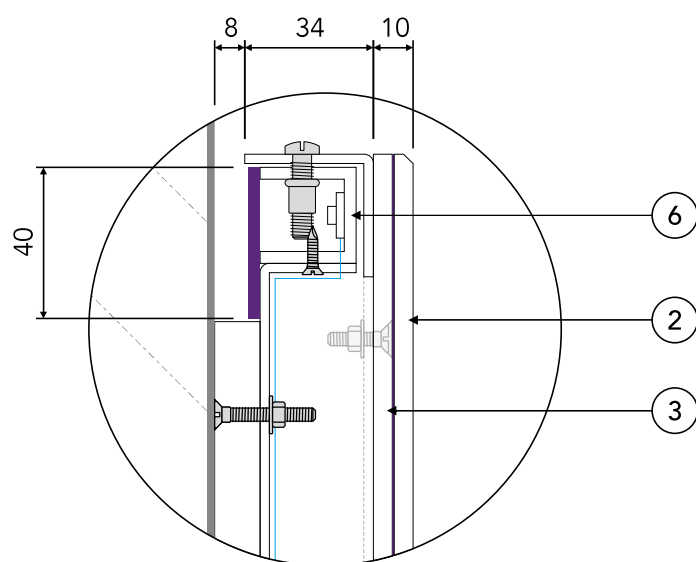

DETAIL B

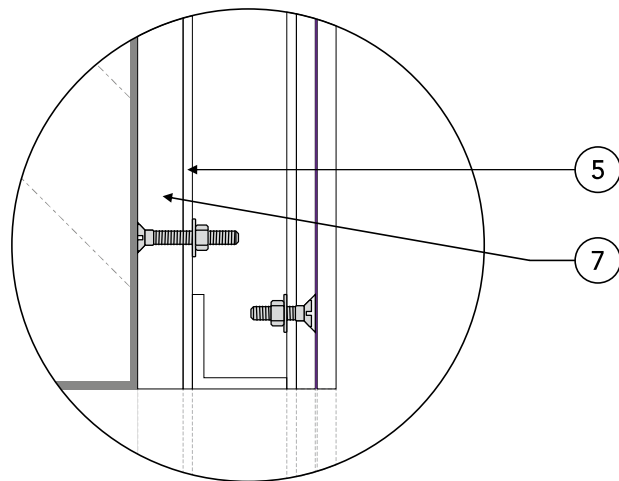

DETAIL C

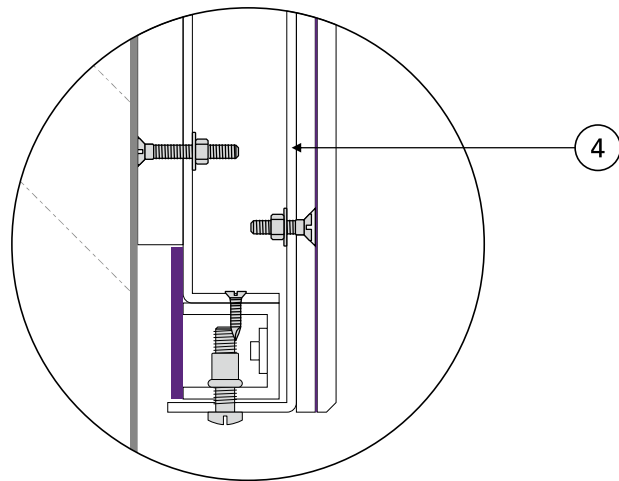

DETAIL D 1:2

Specification

- 1 **FACE UNIT** to consist of 2no. Clear Px acrylic panels and aluminium lid:
- 2 **PANEL A** from 5mm Clear Px acrylic to have 2.5mm bevelled front edge and router cut out aperture to suit machine type, all edges to have buff polished finish. Panel c/w DTM printed detail to rear, then flooded with d/sided VHB tape except logo area.
- 3 **PANEL B** from 5mm Clear Px acrylic to have router cut out aperture to suit machine type, all edges to have buff polished finish. Face of panel c/w csk machine screws set in place with silicone (to avoid damage to PANEL A) prior to being bonded to the rear of PANEL A via VHB tape. Rear of panel flooded with matt Black vinyl to block light except for the Chevron and NatWest letters which illuminate.
- 4 **FACE LID** from 2.5mm folded aluminium to a depth of 34mm c/w fret cut out aperture to suit machine type and area around logo, all finished NW Champion Purple externally and Traffic White internally (header section).
- 5 **BACK TRAY** from 2.5mm folded aluminium to a depth of 25mm c/w fret cut out aperture to suit machine type. Tray to have 25x25x3mm aluminium angle fitted around aperture finished NW Champion Purple externally.
- 6 **LIGHT CHANNEL** from 4no. lengths of 25x25x3mm mitre cut aluminium channel fixed around the returns of the BACK TRAY using csk self tapping screws. Channel to house LEDs and is capped with Purple acrylic (TBD subject to Pearce Signs R&D).
- 7 **KAPATECH PACKER** from 12mm Black Kapatech sheet c/w fret cut out aperture to suit machine type. Packer to be fixed to rear of BACK TRAY using M5x25mm counter sink bolts, penny washers and nuts.
- 8 **ILLUMINATION** from White LEDs fitted to the BACK TRAY to face illuminate the Chevron and NatWest letters. LIGHT CHANNEL rear illumination to create halo effect using White LEDs (TBD subject to Pearce Signs R&D) set inside channel.
- 9 **FIXING METHOD** to be wall or glass mounted using suitable fixings/glass tape for site specific fixing grounds. FACE UNIT located over BACK TRAY and secured through top and bottom returns and light channel using M5 dome head screws and Rivnuts.

NOTES:

- Machine position to be adjusted by others to sit flush with new surround as a minimum or slightly proud. Unit thickness to be reduced/redesigned (TBD subject to Pearce Signs R&D).
- For further details see latest External POP Signage Guide.