




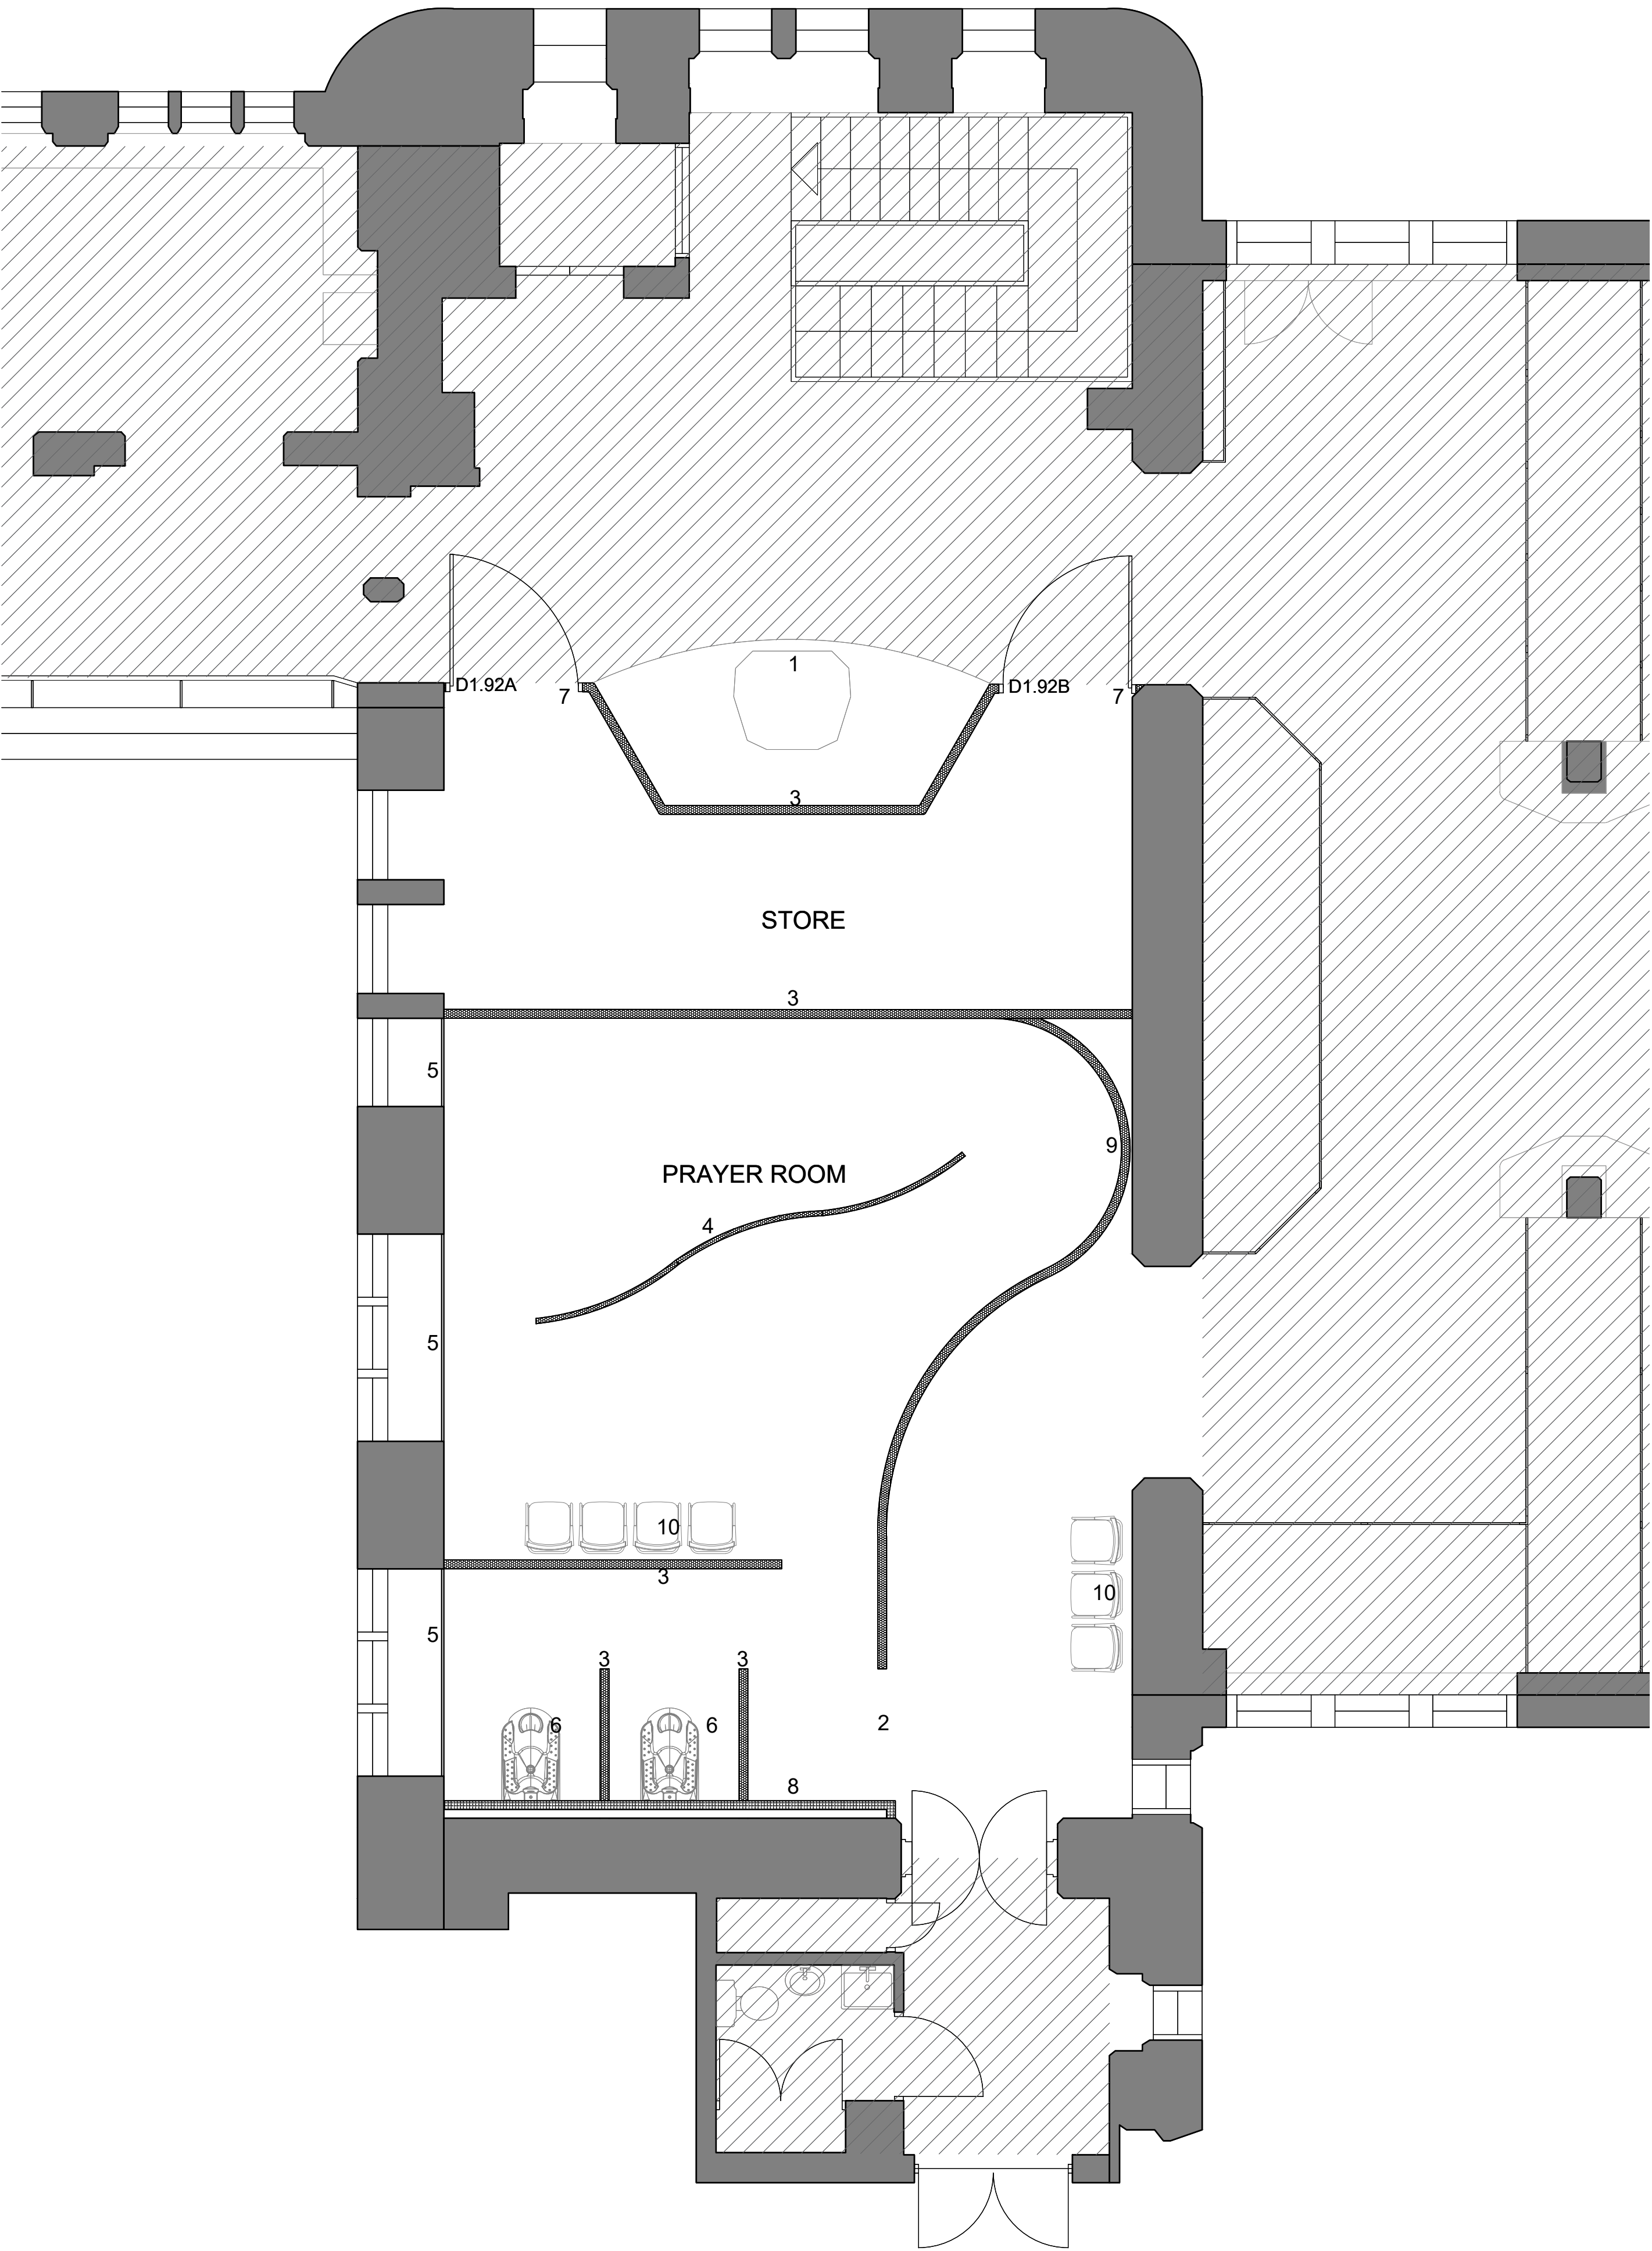

First Floor Proposed Plan - Prayer Room
1:50

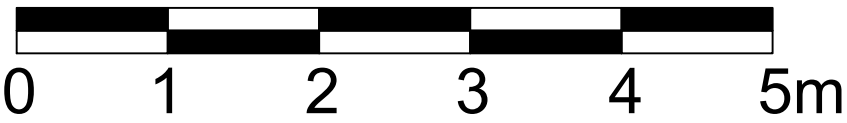

- KEY:
1. Raised Buddha shrine. To Manchester Museums design.
 2. Floor to ceiling height opening
 3. Partition wall: British Gypsum standard with 1 layer of 12.5mm wallboard to each side of 70mm metal studs. System installed to manufacturers details and recommendations. Openings in partition to suit door openings. System installed to manufacturers details and recommendations.
 4. Freestanding flexible partition. Refer to Interior Designers information for specification.
 5. Window screens. Refer to Interior Designers information for details and specification.
 6. 2. no footwashes: WuduMate Classic. Installed to manufacturers standard details and recommendations
 7. Floor to ceiling height frameless door. Paint grade. FD30. EzyJamb Single Rebate.
 8. Wall lining System. British Gypsum with 1 layer of 12.5mm wallboard to prayer room side of 70mm metal studs. System installed to manufacturers details and recommendations. Openings in partition to suit door openings. System installed to manufacturers details and recommendations. Contractor to ensure fireplace located behind wall lining is undisturbed during works.
 9. Curved partition wall: British Gypsum GypWall Curve: 2 layers of 9mm wallboard either side of 70mm Curve studs. Opening in partition to suit door opening. System installed to manufacturers details and recommendations.
 10. Loose furniture. Refer to Interior Designer information for specifications.
- Proposed partition
- Area not included in scope
- NOTE:
All gypsum waste on site should be segregated for disposal via a specialist waste company or manufacturers take back scheme.
- Contractor must divert at least 95% of waste from landfill and recycle 90% of non-hazardous construction waste.

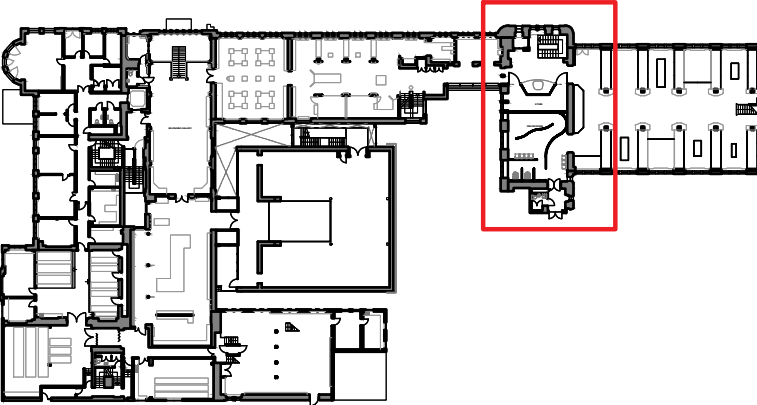

Key Plan First Floor

no.	by	chk.	revision	date	
client					
MANCHESTER 1824 The University of Manchester Manchester Museum					
project	Project Kick Start				
by	chk.	date	scale	sheet size	
ds	aw	10-09-2021	1:50	A1	
title	First Floor Proposed Plan - Prayer Room				
status	job no. / dsg. no			revision	
-	7011 L 1- 56			-	
WILSON MASON					