



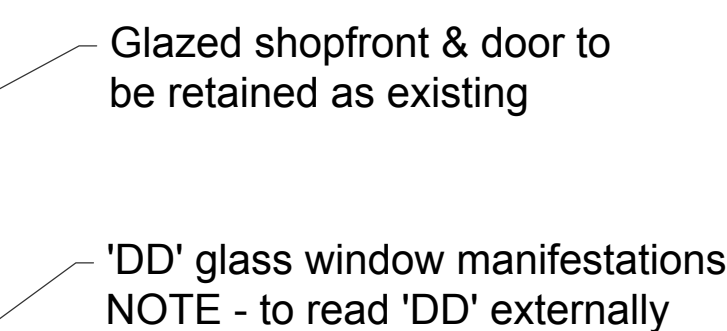


- NOTES:**
1. ALUMINUM RETURN PAINTED TO MATCH
PMS 7540C
 2. 1" TRIM CAP
 3. 3M #3630-3123 DUNKIN' ORANGE
TRANSLUCENT FILM 1ST SURFACE
 4. 3M #3630-1379 DUNKIN' PINK
TRANSLUCENT FILM 1ST SURFACE

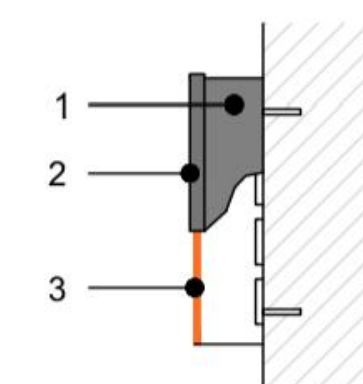

ORANGE "DUNKIN"
CROSS SECTION

SCALE : N.T.S.

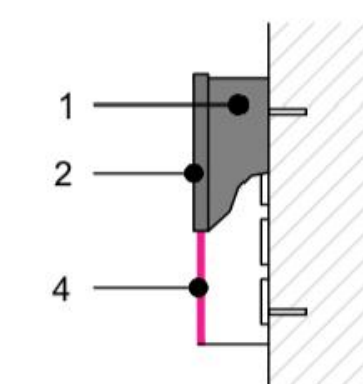

PINK APOSTROPHE
(') CROSS SECTION
SCALE : N.T.S.

ADDITIONAL NOTES:

ARTWORK FONT : DUNKIN SANS DISPLAY

CHANNEL LETTER INTERIOR PAINTED
REFLECTIVE WHITE

LED'S TO BE POPULATED FOR EVEN AND
CONSISTENT LIGHTING WITHOUT HOT
SPOTS OR SHADOWS

Sample colours using the AutoCAD Pantone colour system to display graphics.



PANTONE 165 C - RGB 255 110 012 - CMYK 0 72 100 0

PANTONE 219 C - RGB 242 012 144 - CMYK 1 92 04 0

PANTONE 7450 C - RGB 75 79 84 - CMYK 67 54 46 40

PANTONE BLACK C - RGB 45 41 38 - CMYK 65 66 68 82

100% WHITE - RGB 255 255 255 - CMYK 0 0 0 0

BACK PANEL SIGN CONSTRUCTION
(Where applicable)

100mm deep folded 3mm aluminium panel coated PMS Cool Gray 1C semi gloss c/w aluminium ladder frame.

LETTER CONSTRUCTION

Build up rim return individual text letters consisting of 5mm opal 050 acrylic faces with translucent 3M colour vinyl applied to face. 2mm descaled returns 125mm deep with paint outer face to match PMS 7540C /3M #7725-41 semi gloss c/w 10mm white Foamex back trays. Letters to have trim cap with 25mm returns to sides. Letter interiors to be painted reflective white.

COLOURS & SIGN NOTES

I Faces to be 5mm opal 050 acrylic with vinyl to be applied 1st surface.

Vinyl colours to be:
Orange - 3M #3630-3123 (PMS 165)
Pink - 3M #3630-1379 (PMS 219)
Grey - 3M #7725-41 (PMS 7540C)

All paint finishes to be semi gloss.

Letters and Logos illuminated with bright white LEDs to 300 Lux. LEDs to be populated for even and consistent lighting without hot spots or shadows.

Channel letter interior painted reflective white.

Artwork font: Dunkin Sans Display.

Aluminium disk (registered 'R') painted white with coloured vinyl detail.

