


JORY FLOOD S WALL MOUNTED LED LUMINAIRE

An LED wall mounted projector manufactured from die-cast aluminium with a toughened glass lens.

This luminaire is rated IP67 with a system efficiency of up to 55 lumens/W and a service lifetime of 40,000 hours, L70, B50.


SPECIFICATION

- MOUNTING: Wall mounted
- LIGHT SOURCE: LED
- OPTICAL SYSTEM: Polished reflector + transparent cover (PRT)
- BEAM ANGLE:
 - 30°
 - 120°
- LIGHT DISTRIBUTION: Direct
- WIRING: Electronic control gear FIX (ECG)
- MATERIALS:
 - Cover: transparent hardened glass
 - Housing: die-cast aluminium
 - Reflector: polished aluminium
- SURFACE FINISH: INX / BRZ
- SERVICE LIFETIME (Ta=25°C): 40,000 hours / L70 / B50
- AMBIENT OPERATING TEMPERATURE: From -10 °C to +35 °C
- IP PROTECTION DEGREE: IP67
- 220-240V 50-60Hz

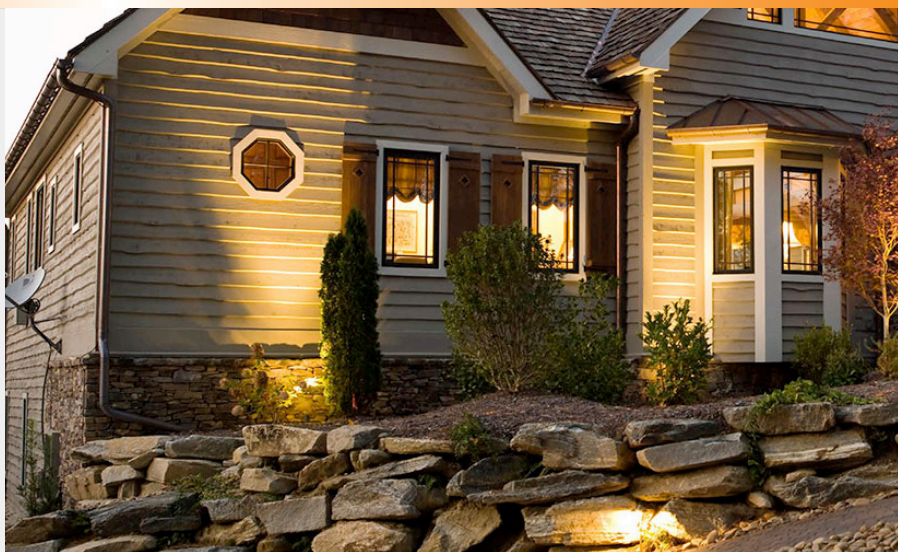

Suitable for various outdoor applications.



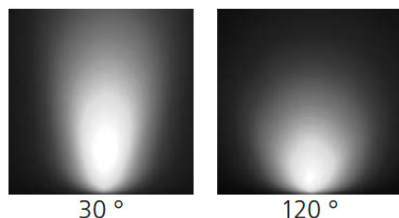


30 °


120 °

COLOUR VARIANTS:

INX



BRZ

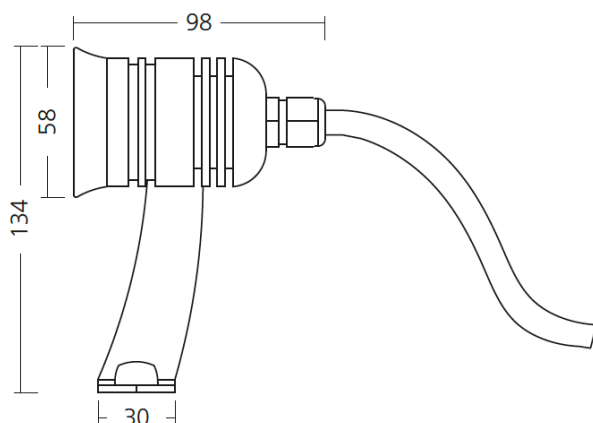

TYPE	MOUNTING TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX CRI (Ra)	CORRELATED COLOUR TEMPERATURE CCT (K)	BEAM ANGLE (C0-180, C90-270)	WEIGHT (kg)
JORY FLOOD S	WMD	245	5	55	80	3000	30°	0,5
JORY FLOOD S	WMD	150	5	33	80	3000	120°	0,5

Luminous flux tolerance +/- 10%.