




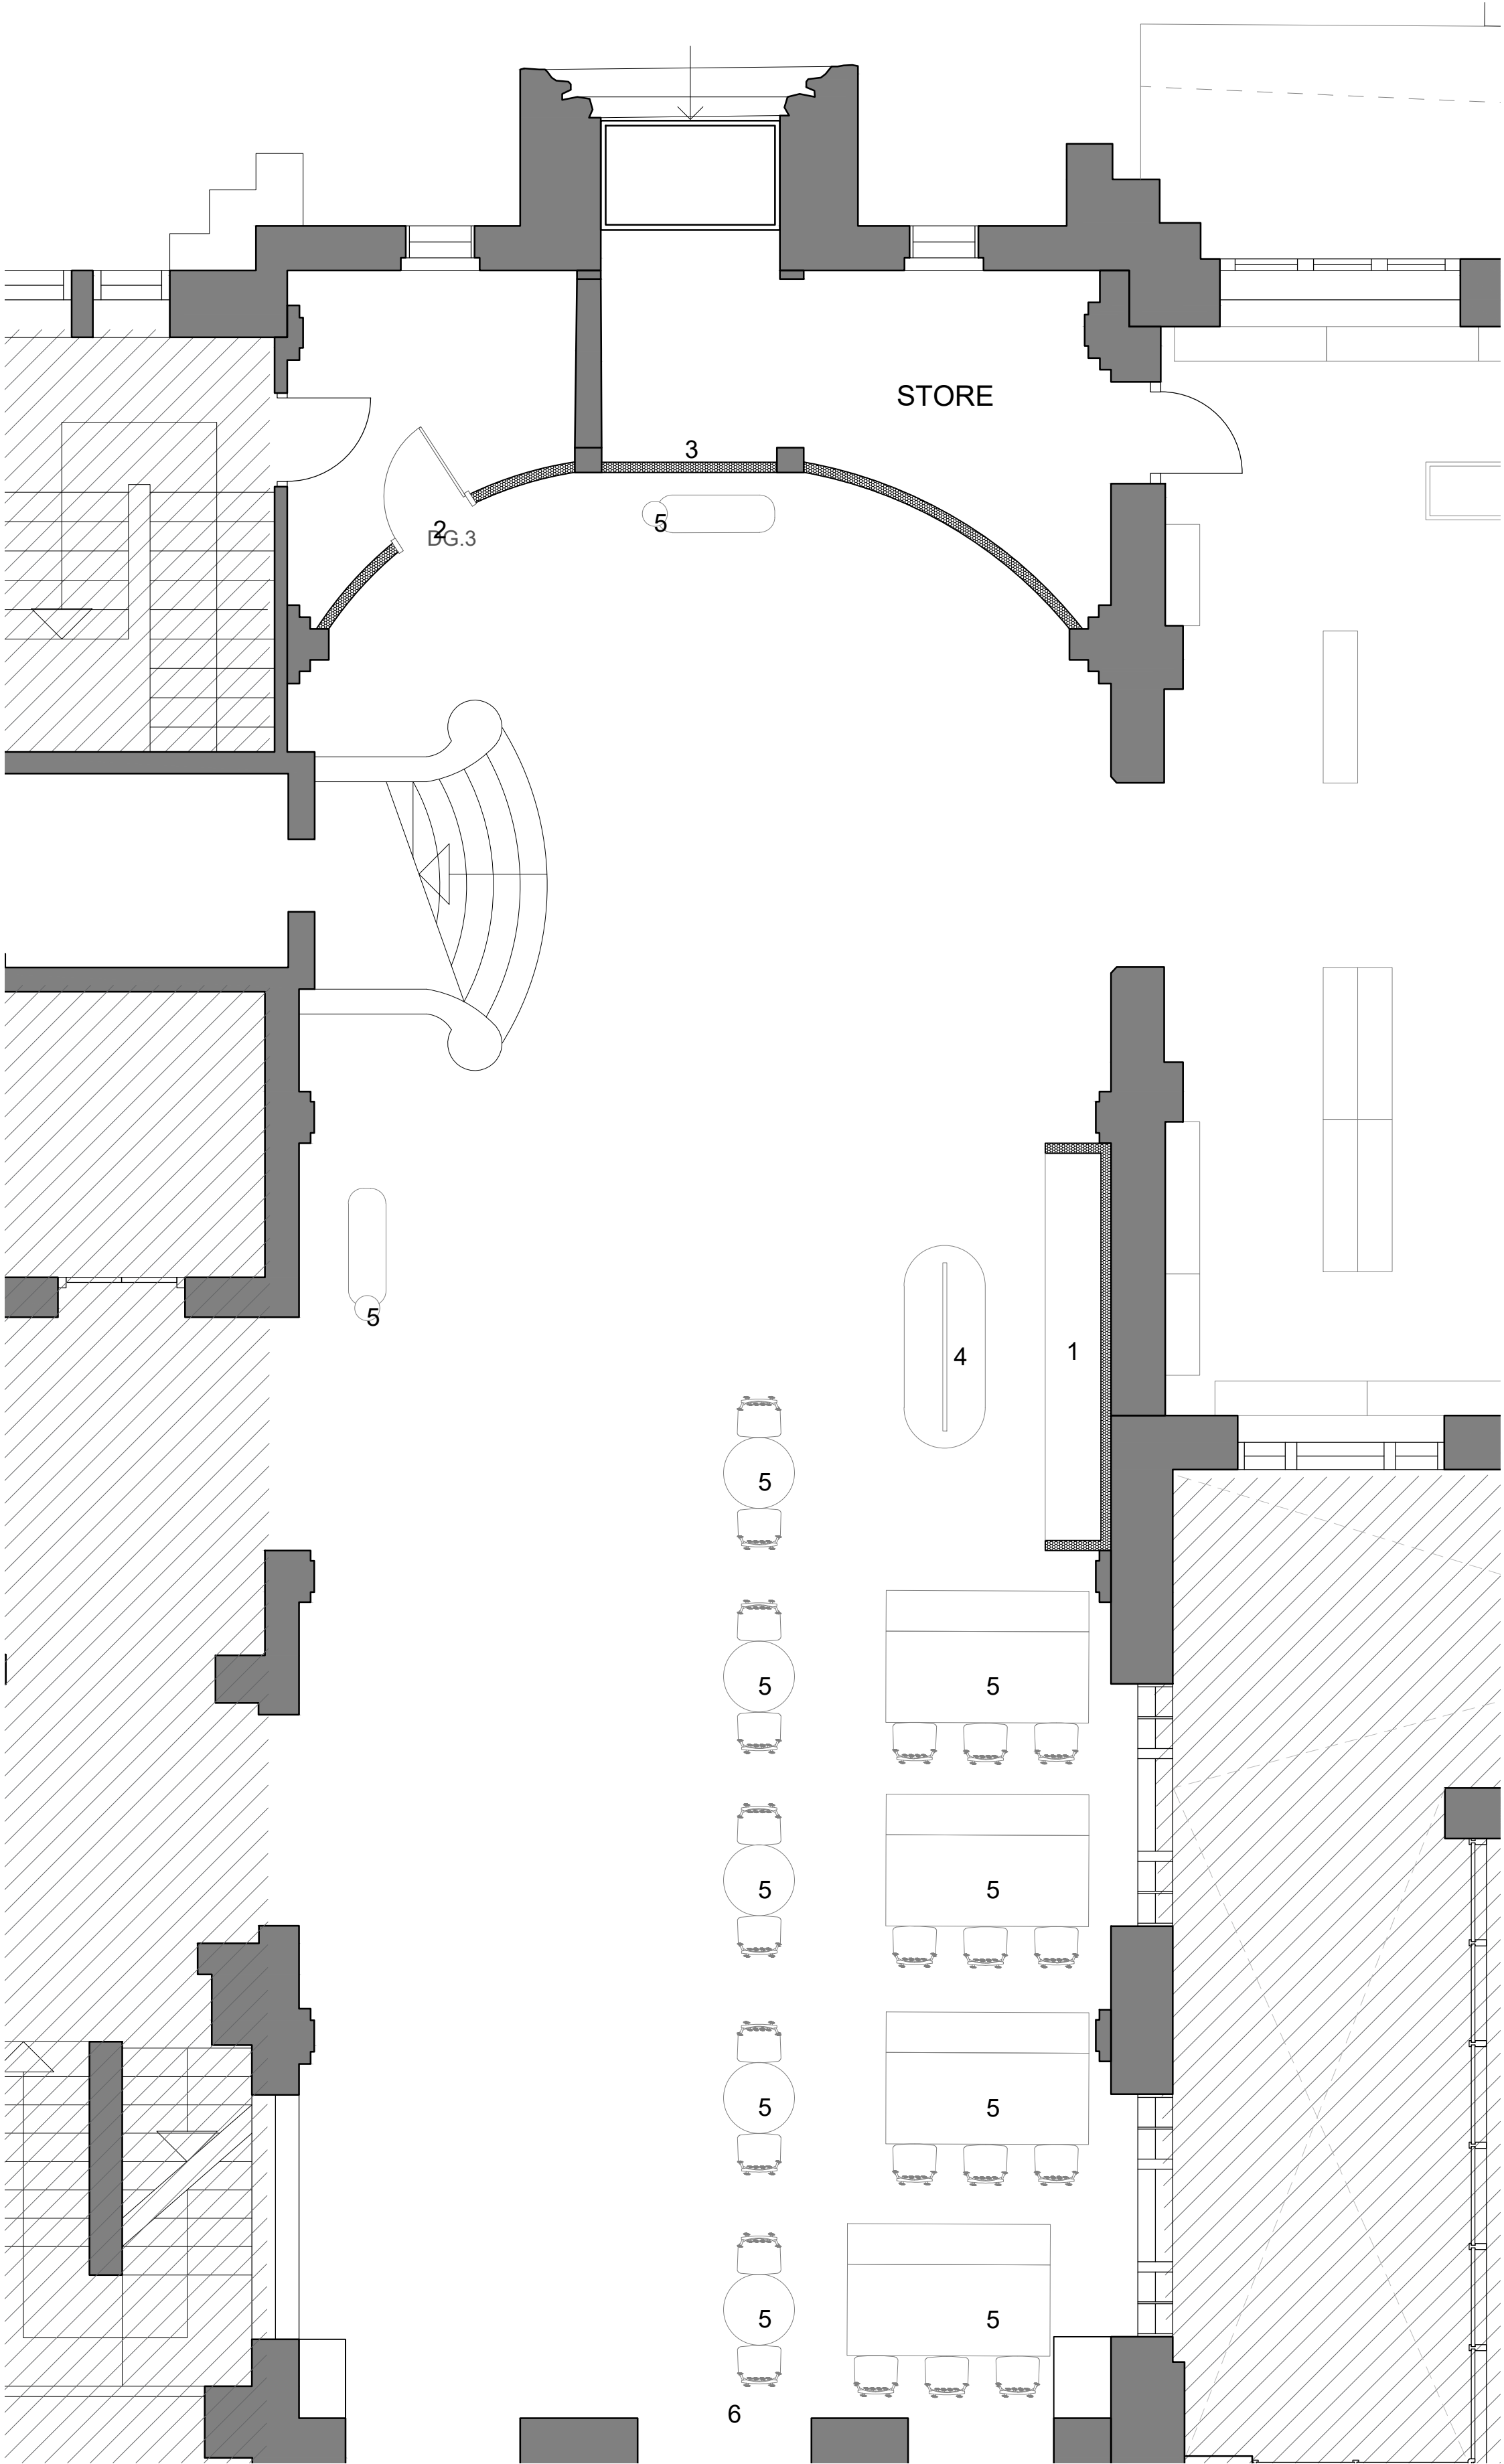

Ground Floor Proposed Plan - Main Hall A - North section of Main Hall
1:50

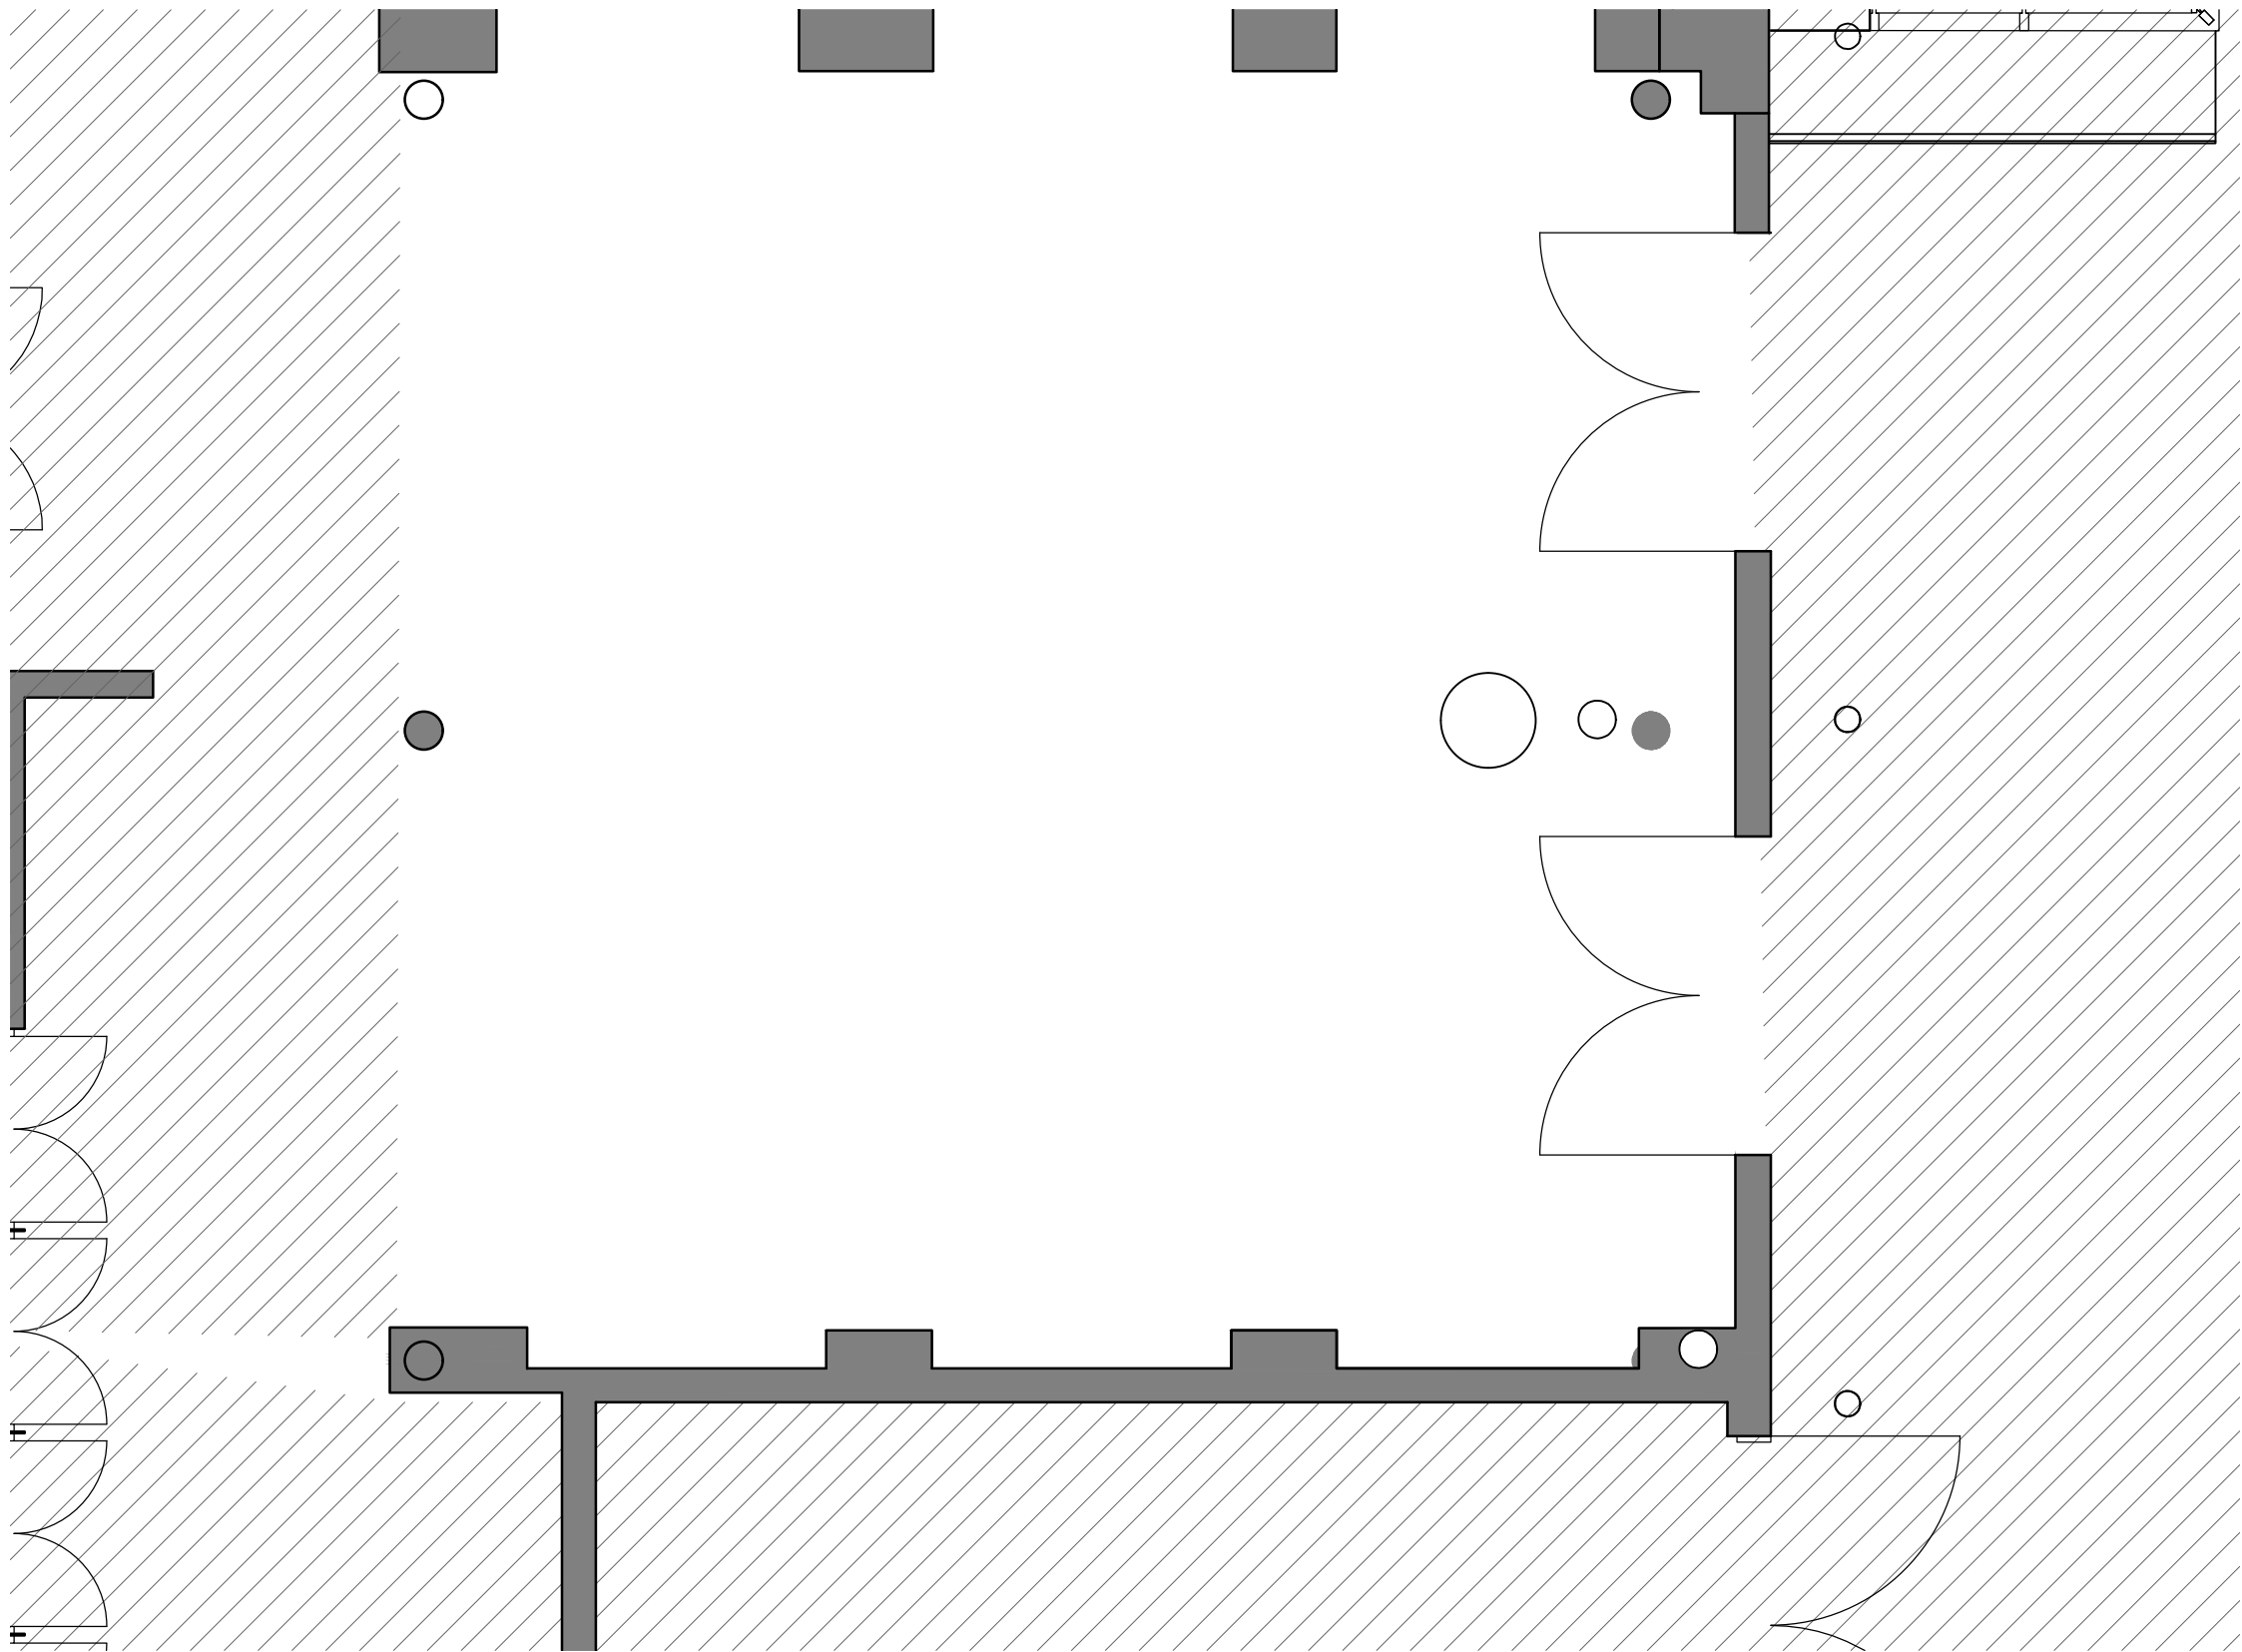


Ground floor Proposed Plan - Main Hall B - South Section of Main Hall
1:50

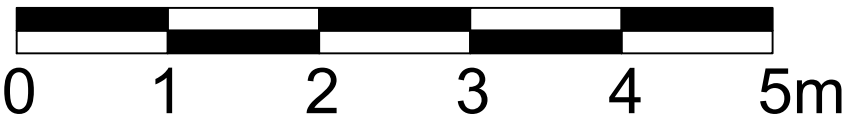

NOTE:
All gypsum waste on site should be segregated for disposal via a specialist waste company or manufacturers take back scheme.

Contractor must divert at least 95% of waste from landfill and recycle 90% of non-hazardous construction waste.

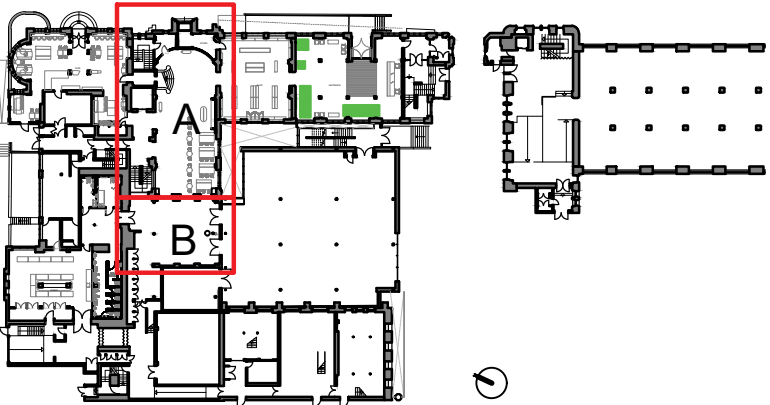

Key Plan Ground Floor

- KEY:
- Fixed pop up cafe unit. Refer to Interior Designers information for details. Refer to DSSR / M&E Engineers drawings for details of drainage and power to the pop up cafe unit.
 - New Door: EzyJamb frameless frame system with Shadbolt Shadcore paint grade FD30S door with intumescent smoke seals. Refer to door schedule. For ironmongery refer to ironmongery schedule.
 - Proposed curved partition: British Gypsum GypWall Curve: 2 layers of 9mm wallboard either side of 70mm Curve studs. Opening in partition to suit door opening. System installed to manufacturers details and recommendations.
 - Moveable pop up cafe element. Refer to Interior Design information for details.
 - Loose furniture. Refer to Interior Designers information for specification.
 - Proposed location of collapsible stage. Collapsible stage to be supplied to the following specification: Stage Systems Q-build stage: 500mm high stage with 3m by 2.25m total stage area. Stage must include double tread steps, access ramp fascia panels and a suitable castor-based storage trolley. Standard finish.

Area not included in scope