
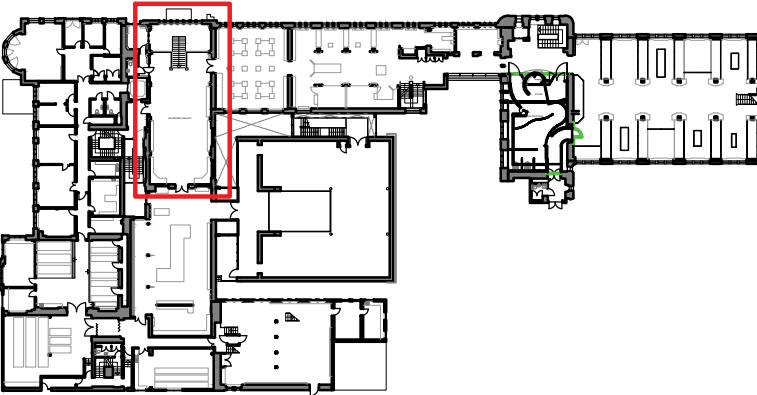


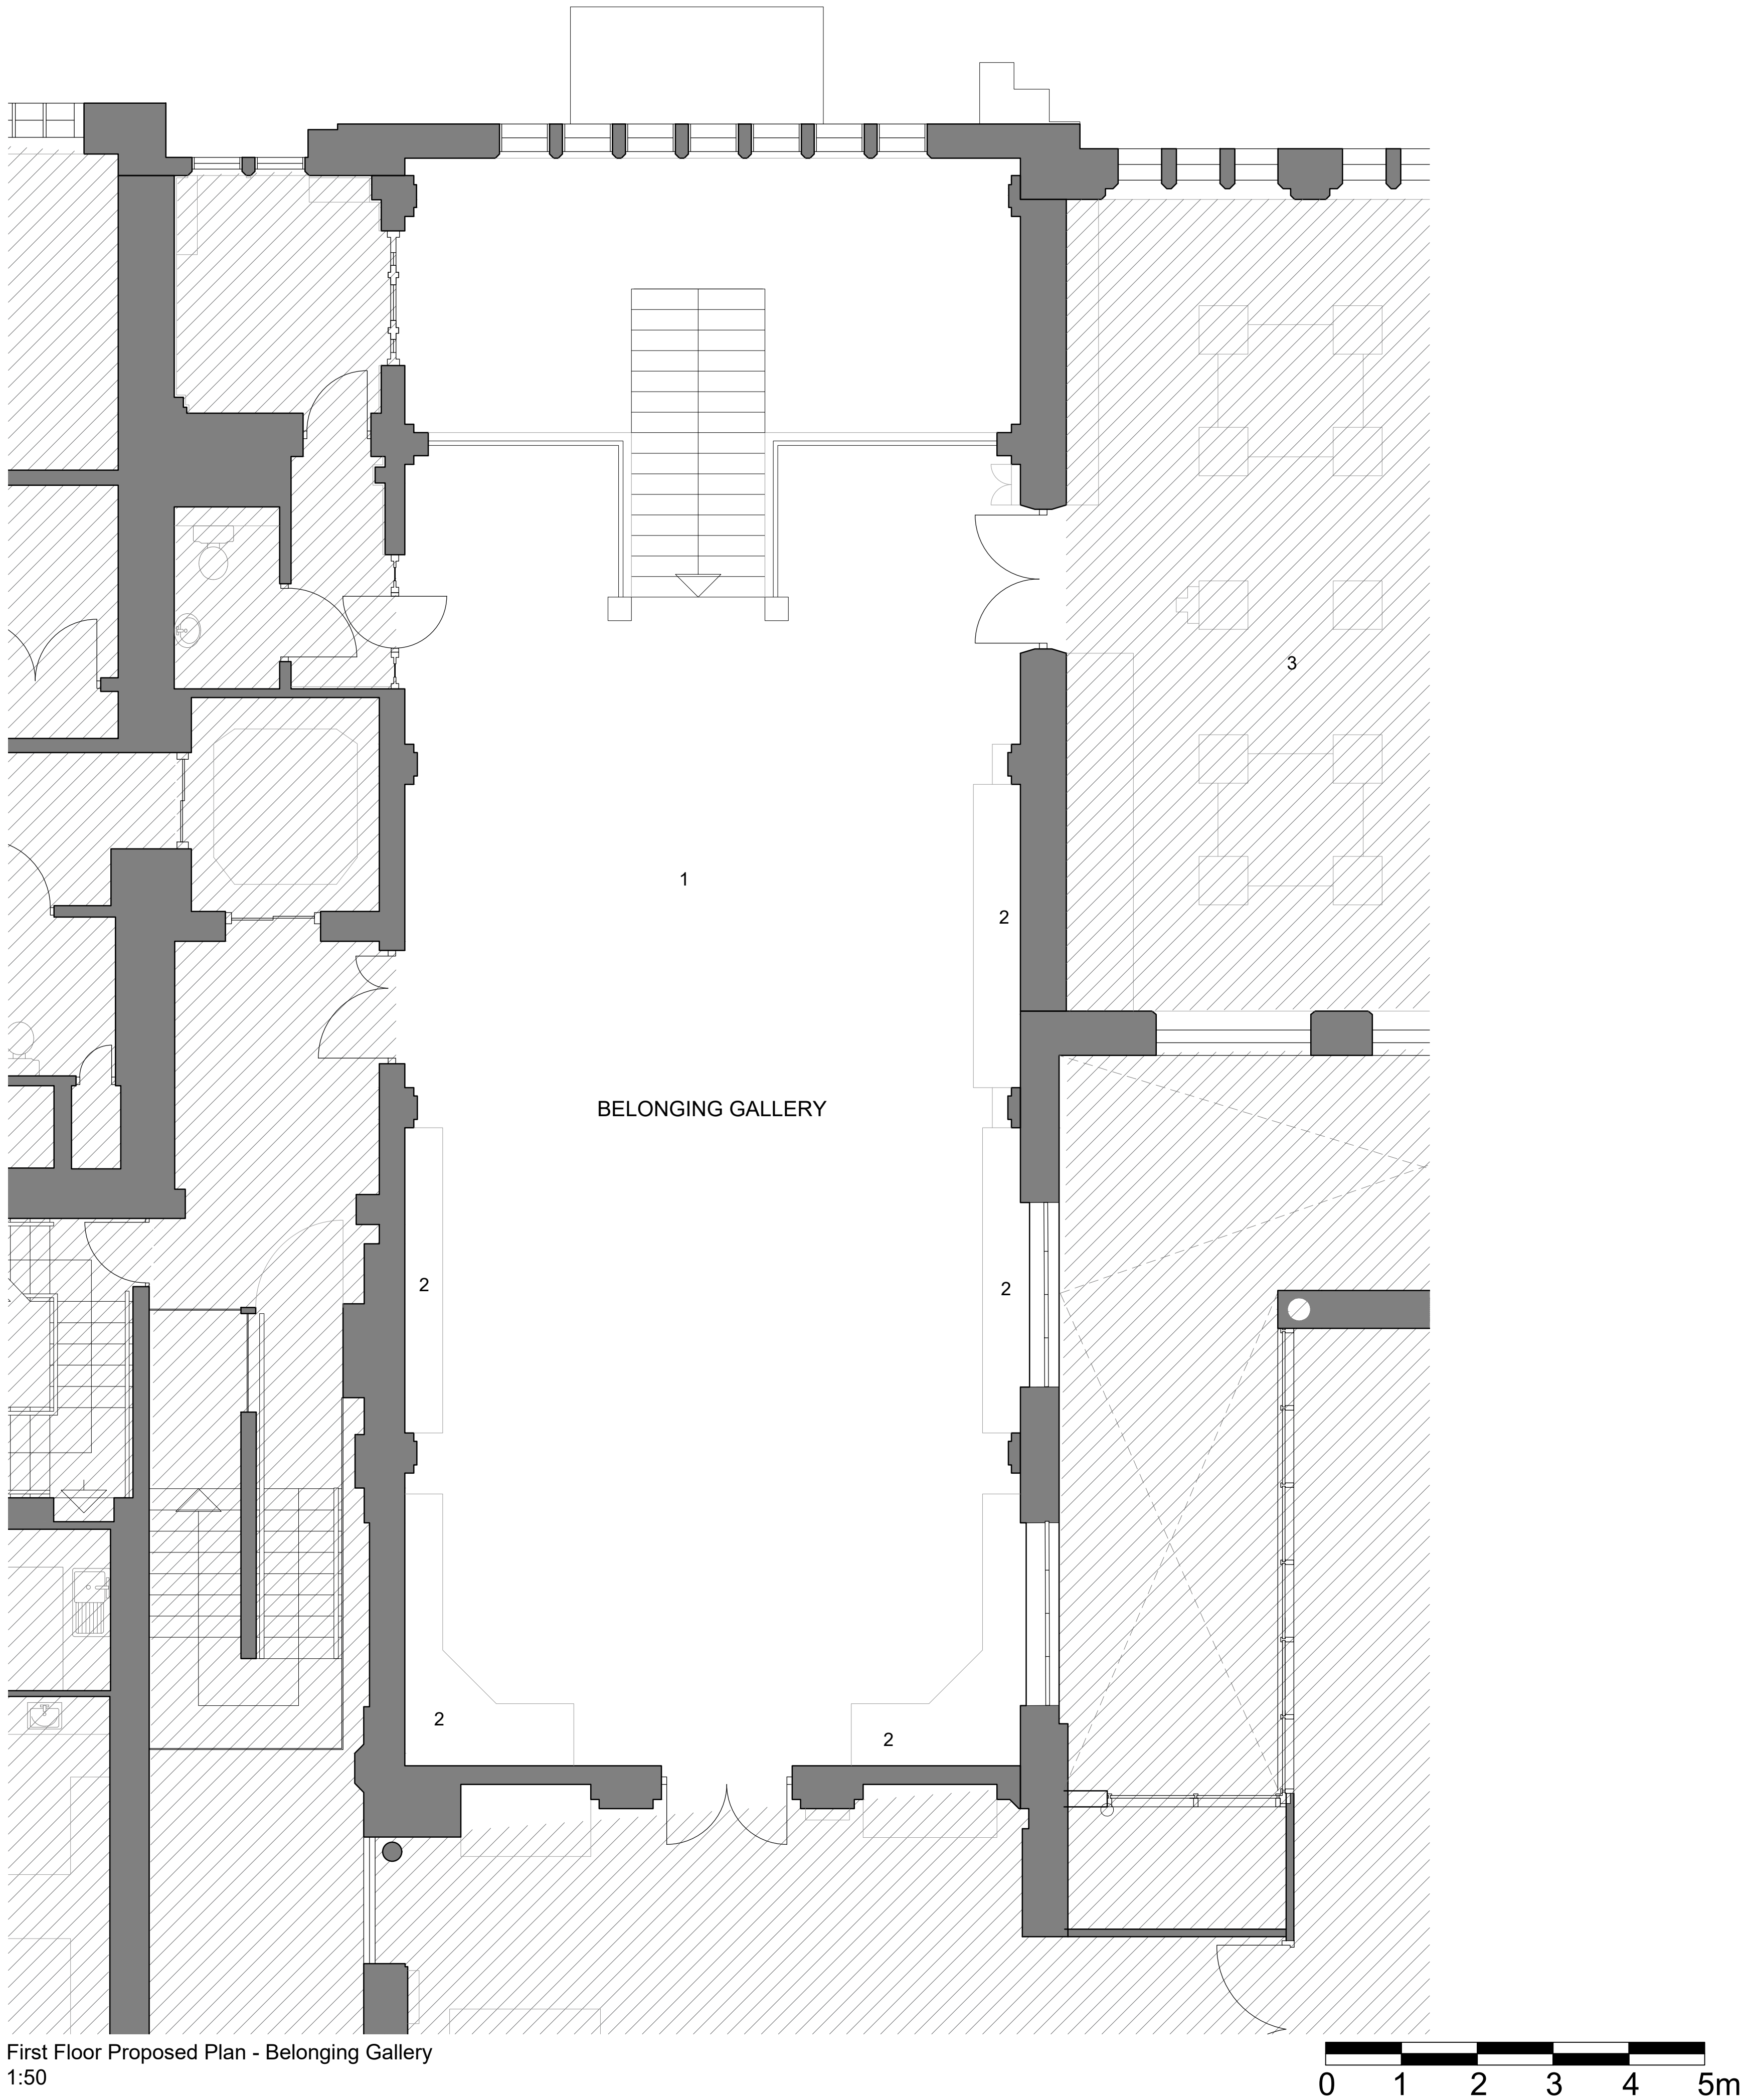

Key Plan First Floor

- KEY:
1. Full extents of floor to be replaced. Refer to finishes key for specification. Following removal of existing carpet, existing substrate is to be prepped with leveling compound to floor manufacturers recommendation prior to application of new flooring.
 2. Existing display cabinets retained and protected during works to floor.
- /// Area not included in scope
- NOTE:
Contractor must divert at least 95% of waste from landfill and recycle 90% of non-hazardous construction waste.

no.

by

chk.

revision

date

client

MANCHESTER
1824

The University of Manchester
Manchester Museum

project

Project Kick Start

by

chk.

date

scale

sheet size

ds

aw

10-09-2021

1:50

A1

title

First Floor proposed Plan - Belonging Gallery

status

job no. / dsg. no

revision

-

7011 L 1- 55

-

WILSON MASON