





LOCATION PLAN

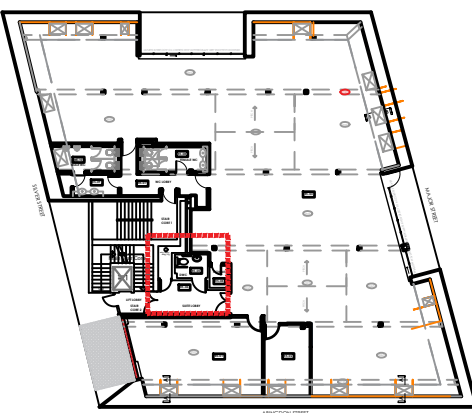


SPECIFICATION: DISABLED TOILET


- 1 DOC M PACK - IDEAL STANDARD DOC M CONTOUR 21+ CLOSE COUPLED WC WITH STAINLESS STEEL GRAB RAILS
- 2 WALL MOUNTED HAND DRYER, STAINLESS STEEL-NEW DYSON TO MATCH WCs
- 3 WALL MOUNTED SOAP DISPENSER- BRUSHED STAINLESS STEEL FINISH
- 4 STAINLESS STEEL WALL MOUNTED TOILET ROLL DISPENSER
- 5 STAINLESS STEEL WALL MOUNTED PAPER TOWEL DISPENSER
- 6 ALARM RESET BUTTON
- 7 MIRROR: WALL MOUNTED MIRROR WITH CONCEALED FIXINGS, FLUSH WITH TILES
- 8 WALL FINISH - SOLANA 400 X 250mm GLOSS WHITE TILES BY CERAMIC INTERNATIONALE LEEDS - CONTACT DANNY MALONE 07411 473571 GROUT : MAPEI110 MANHATTAN 2000
- 9 DOOR MOUNTED COAT HOOK (REAR OF DOOR) - STAINLESS STEEL
- 10 WHITE ACRYLIC PANEL FLUSH WITH WALL TILING 400 X 900mm
- 11 FLOOR TILING: SEE FLOOR FINISH DRAWING 1213-05-FL-01
- 12 DDA - ALARM PULL CORD
- 13 DDA - STAINLESS STEEL GRAB RAIL TO DOOR
- 14 BASIN MIXER TAP - IDEAL STANDARD SENSORFLOW 21 A4789(AA) MOUNTED SPOUT WITH INTEGRAL SENSOR, COPPER TUBE INLETS, SERVICING VALVES AND FILTER, MAINS SUPPLIED WITH PRE-MIXED WATER. CHECK TEMPERATURE IS SAFE AND USE AN APPROPRIATE TEMPERATURE REDUCTION DEVICE IF REQUIRED

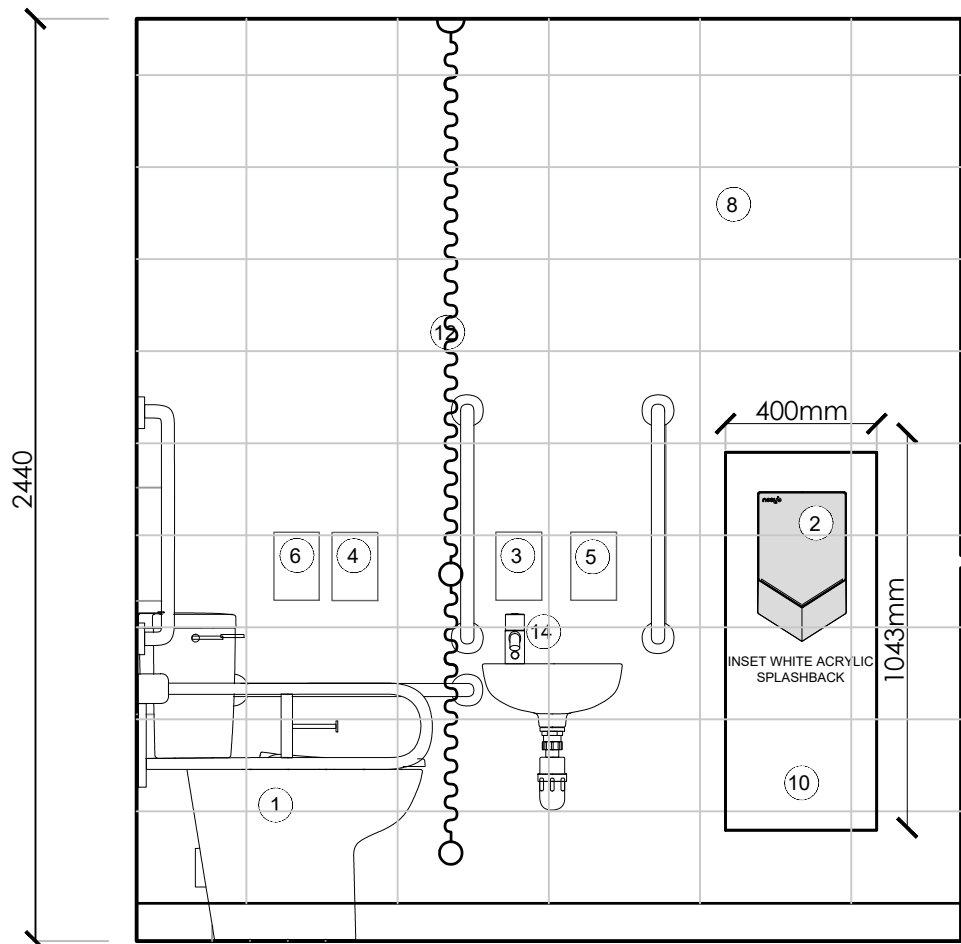


ELEVATION B-B

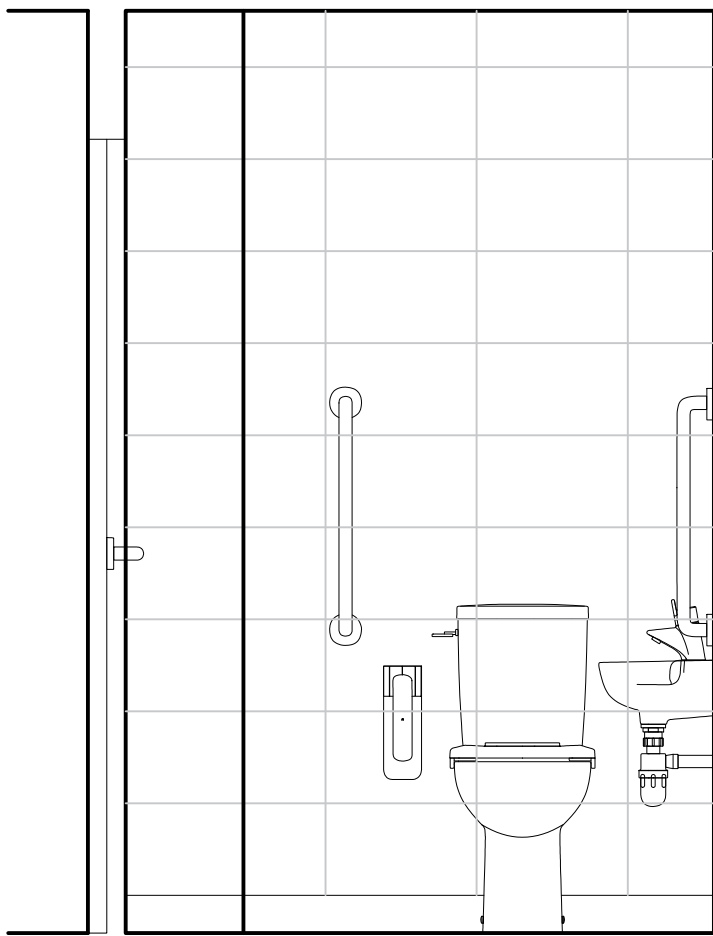


ELEVATION A-A

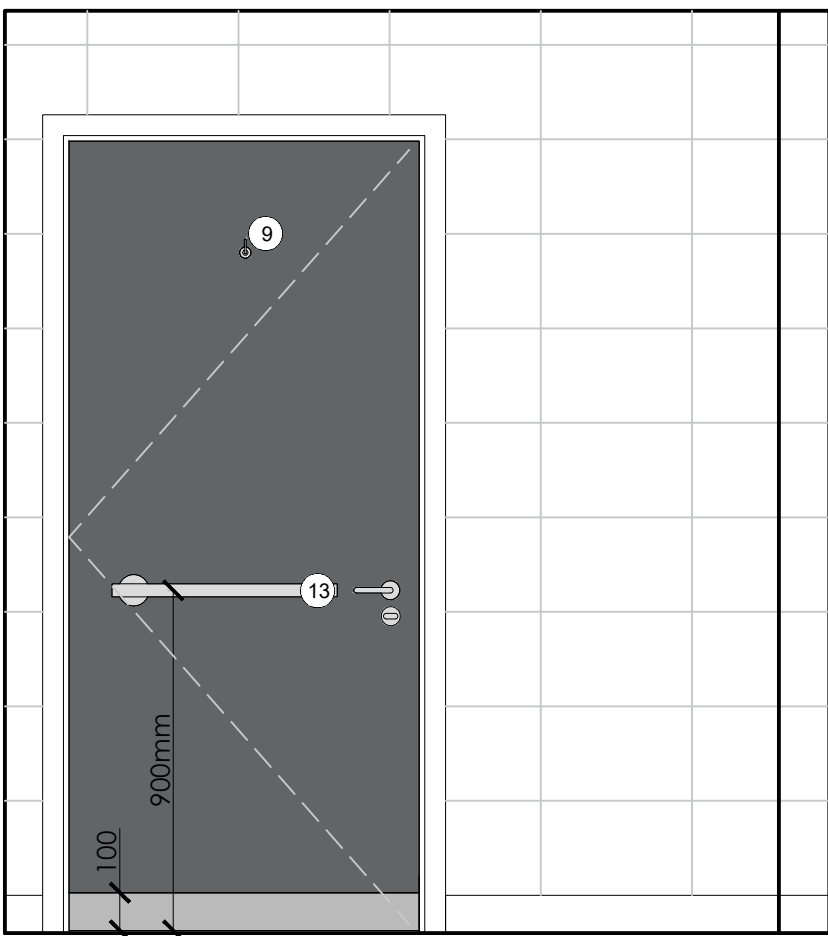

ELEVATION D-D

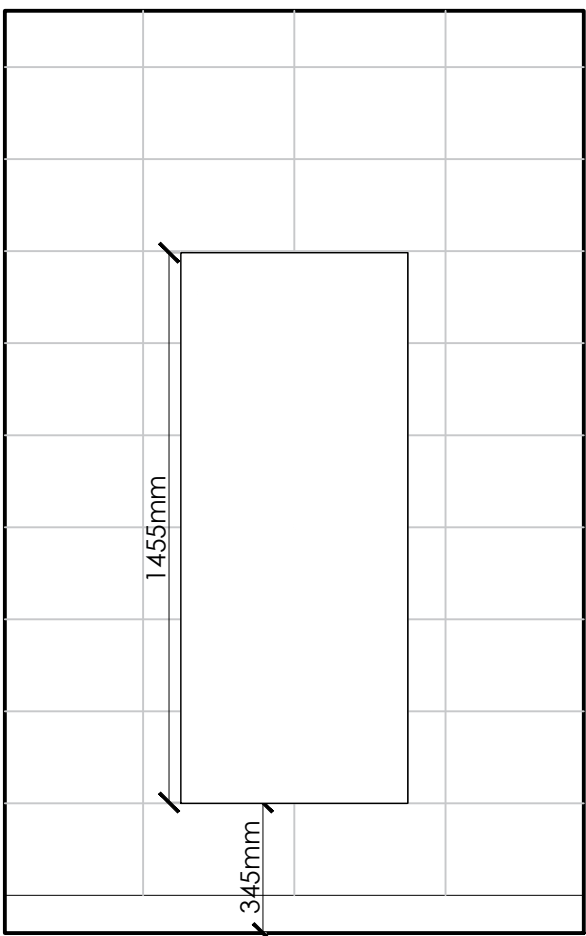

ELEVATION C-C

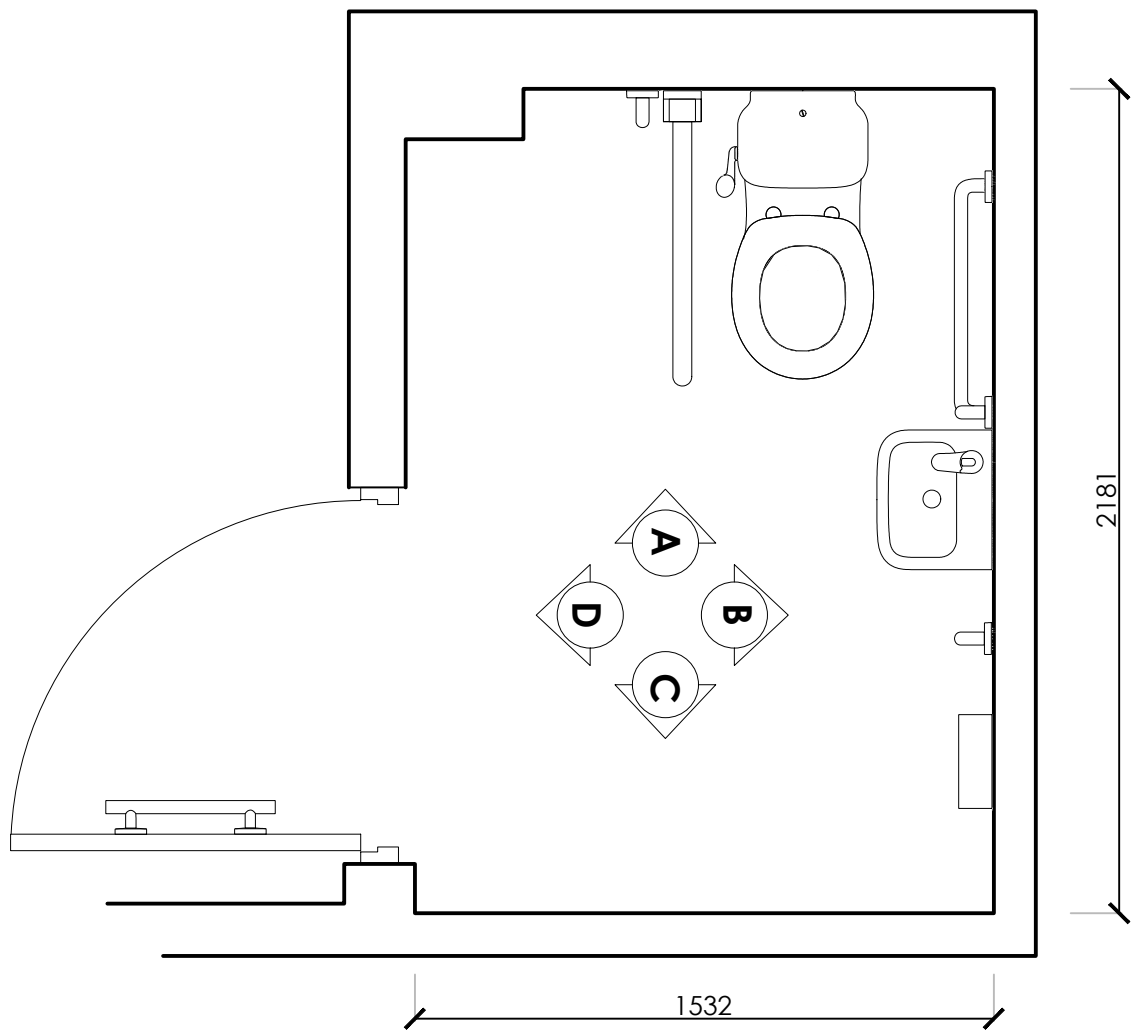

PLAN

Rev	Date	Description	Initials
A	23.11.21	FOR APPROVAL	CB

FOR APPROVAL

Client:

ASI

Project:

CAT A + REFURBISHMENT

Address:

101 PRINCESS ST
MANCHESTER

Drawing Title:

5TH FLOOR PROPOSED
DISABLED WC SHEET 3

Date:

19.11.2021

Project Number:

1213

Scale:

1:20@A1

Drawn by:

FLC

Drawing Number:

1213-05-WC03(A)