


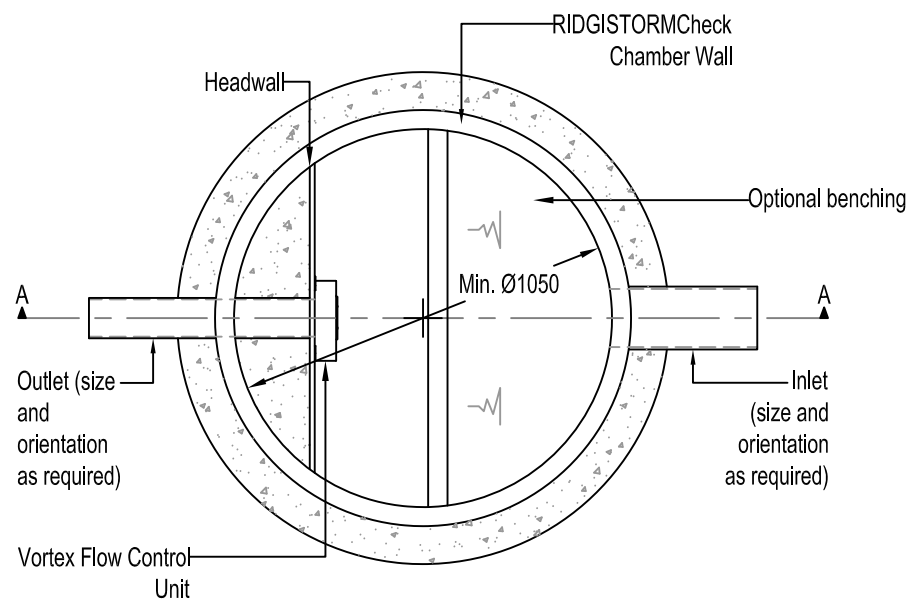


PLAN VIEW
Scale (1:30)

Table 1) Typical Chamber Specification

Chamber diameter (Ømm)	1050	1200	1500	1800	2100	2400	2700	3000
Step Rungs / Ladder	✓ ²⁾	✓	✓	✓	✓	✓	✓	✓
Lifting Lugs	✓	✓	✓	✓	✓	✓	✓	✓
Connections (Refer to Manhole sheet)	Connections available from 100mm - 3000mm - Dependant on Technical Approval							
Benching and channeling	✓	✓	✓	✓	✓	✓	✓	✓

1. Typically step rungs are only used to a depth of 3m, once this depth is exceeded ladders are typically required.
2. Ladders cannot be used in chamber diameters smaller than Ø1200mm
3. Lifting points are available in standard, extended and heavy duty forms, the correct lifting points will be chosen dependant on weight and diameter.

Note.
All builders work and manhole covers by others

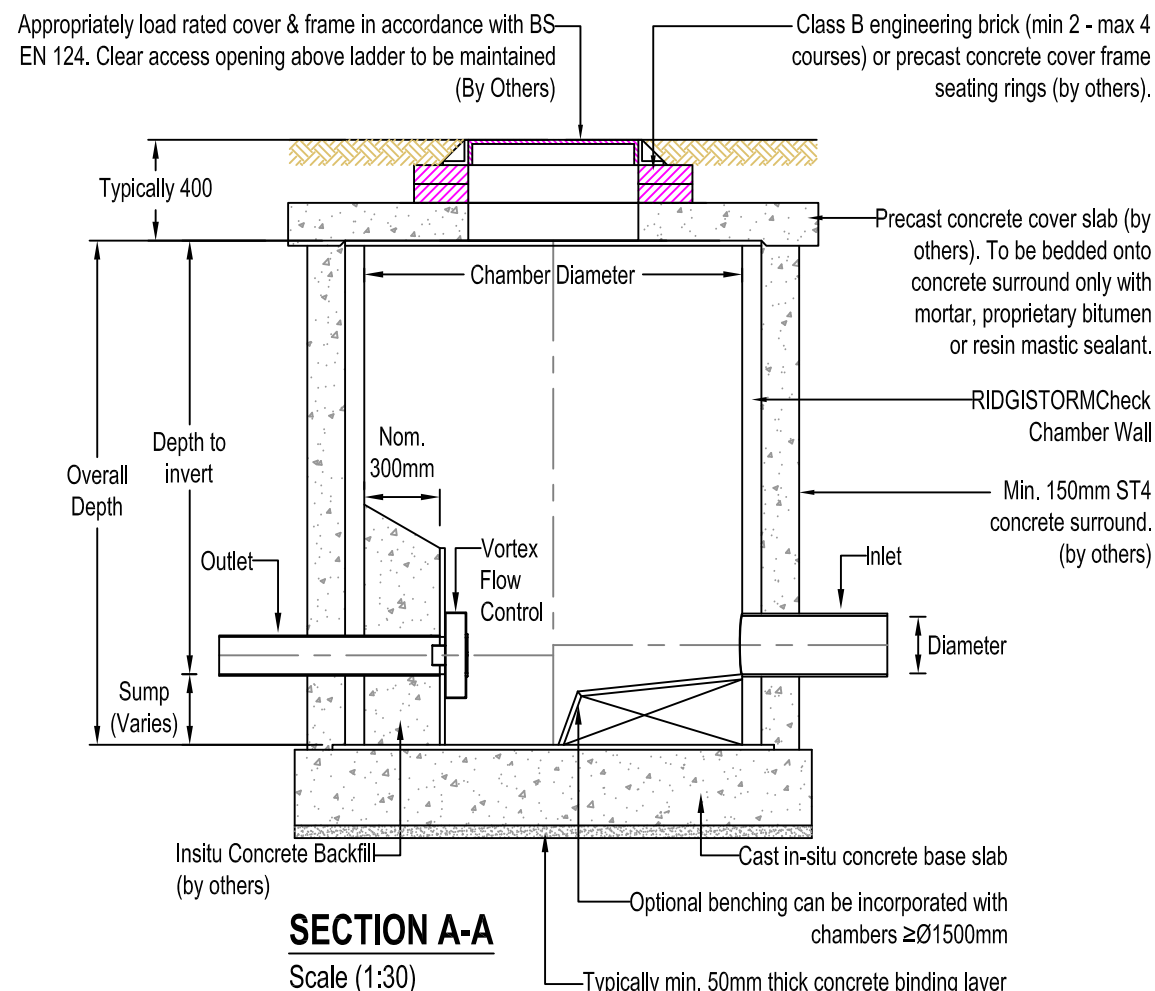

SECTION A-A
Scale (1:30)

Table 2) Information Required for Vortex Flow Control Specification

Internal chamber diameter (Ømm)	
Design Head (m)	
Design Flow Rate (l/s)	
Outlet pipe Diameter (Ømm)	
Benching Required (Y/N)	

NOTES - Step Rungs and GRP Ladders

1. Polypipe Civils can supply man access chambers with pre-installed step rungs or ladder. Please refer to Polypipe Ridgistorm-XL Technical Guide and standard detail RST_SD_CM_002.
2. Installer to ensure access to manholes to comply with HSE Safe work in confined spaces; Confined Spaces Regulations 1997 Approved Code of Practice (ACOP) L101 (Third Edition, published 2014).

NOTES - Lifting Points

1. Polypipe Civils can supply access chambers with pre-installed lifting lugs; subject to technical assesment. Please refer to Polypipe Ridgistorm-XL Technical Guide and standard detail RST_SD_CM_001.

NOTES - Stub Connections and Rocker Pipes

1. Polypipe Civils supply stub connections and rocker pipes if required. For guidance please refer to Polypipe Ridgistorm-XL Technical Guide and standard detail RST_SD_FT_003.

NOTES

1. All dimensions in millimetres, unless otherwise stated.
2. All dimensions are nominal and may vary within manufacturing or construction tolerances.
3. All site temporary and enabling works by others.
4. Ridgistorm-XL units to be installed in accordance with Polypipe Civils recommendations (refer to Polypipe technical guidance for further information); giving due consideration to the requirements of the approving and adopting organisation(s) who will be taking ultimate ownership of the installation.
5. Dimensions are based on a minimum stiffness class SN2 pipe; corresponding to the standardised pipe profiles current at the time of this drawing's issue.
6. This drawing is intended for guidance only. Confirmation of the information contained within this document should be sought from the consulting engineers before final design or construction activities commence.
7. Unless otherwise stated, all Ridgistorm-XL is supplied to site without direct means of lifting incorporated. The lift supervisor must assess and plan the lift, in the circumstances of the lift, and provide slings and/or other controls as deemed necessary to ensure a safe lift.
8. Minimum and maximum chamber depths applicable, dependant on project specification and fabrication restrictions.

All information in this document is of an illustrative nature and is supplied by Polypipe Civils & Green Urbanisation without charge. Polypipe may modify and change the information, products and specifications from time to time for a variety of reasons, without prior notice. Updates will not be issued automatically. This information is not intended to have any legal effect, whether by way of advice, representation or warranty (express or implied). We accept no liability whatsoever (to the extent permitted by law), if you place any reliance on this document you must do so at your own risk. The information within this document should not be solely relied upon to determine the suitability or installation requirements of our products for a proposed application and expected site conditions; expert advice should be sought in this respect. Copyright © 2020 Polypipe. All rights reserved. 'Polypipe logo' is a registered trademark of Polypipe. All Polypipe products are protected by Design Right under CDPA 1988.