SSD 450-500 socket silencer

Article Number: 9563



Description

Socket silencer for special requirements at the inlet side. The sound absorption at 250 Hz is in average dB. The SSD is manufactured from seawater resistant aluminium. The sound absorbing material is abrasion resistant up to a velocity of 20 m/s. The crank is extendable for service options.
Suitable for DVS/DHS, DVSI, DVN, DVNI, DVC, TFSK and DVEX.

Technical parameters

Dimensions and weights		
Weight	18.2	kg

Performances

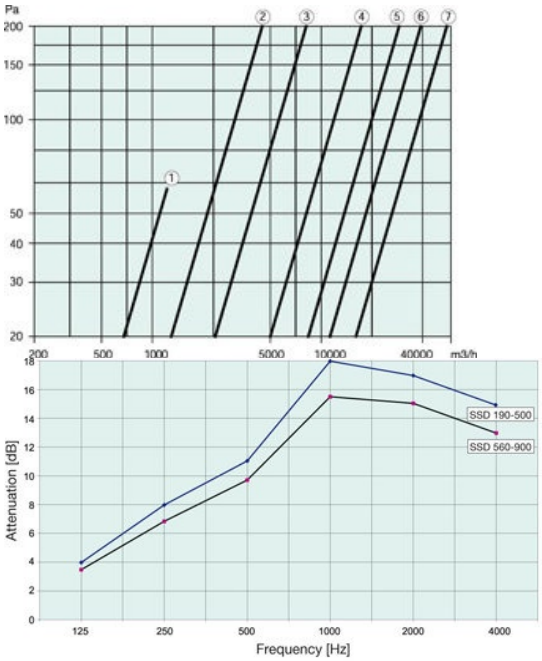

Dimension

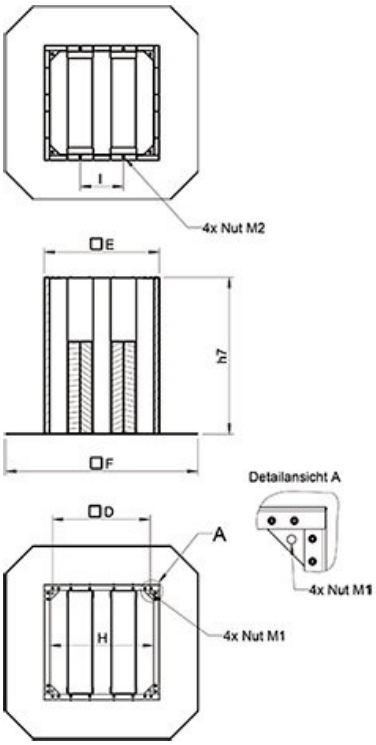

	D	E	F	H	nut M1	nut M2	I	h7	weight (kg)
SSD 190/225*	245	297	571	258	M6	M6	114	400	5
SSD 310/311**	330	398	710	345	M6	M6	152	500	8
SSD 315M/L***	450	478	797	434	M10	M8	179	650	13
SSD 355/400	450	562	874	472	M10	M8	214	650	17
SSD 450/499/500	535	628	900	538	M10	M8	241	650	19
SSD 560/630	750	898	1200	808	M10	M8	471	700	31
SSD 710	840	985	1300	898	M10	M8	508	800	41
SSD 800/900	1050	1212	1540	1118	M12	-	-	1000	65

Accessories

ASK 450/500 inflow box SSD (300907)