


All dimensions to be checked
on site prior to any
commencing work.

KEY

- Existing
- Proposed
- Downstand beams
- Existing to be removed
- Drawing reference
1/312 (TBC)

Note: Drawing to be read
in conjunction with 1665
C(423), 1665 C(802) NBS
the External works repair
schedule and the window
repair schedule.

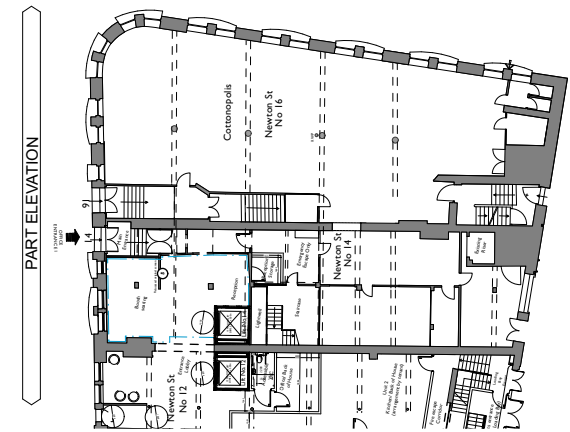

PART GROUND FLOOR PLAN

Existing windows with timber boarding - boarding to be carefully removed and window to be repaired in accordance with **item 11** in the external repair schedule.

Areas of vegetation growth on elevation- existing vegetation to be carefully removed and hacked out from joints with hand tools only. localised area to be sprayed with weedkiller. jointing to be repointed in accordance with **item 3** in the external repair schedule.

Areas of repointing
Mortar to be carefully hacked out and replaced where missing as per NBS C41/810-860 and **item 3** in the external repair schedule

L Indicates window decals to be retained.

[L] Indicates Non-original window decals to be carefully removed.

C Indicates existing window pane with penetration for services. Pane to be replaced in accordance with NBS

Generally

non-original and redundant fittings to be carefully removed by hand

Stone and brick to be cleaned with the Doff system in accordance with **items 12 and 13** of the external repairs schedule (NBS clause M40)

① numbers on elevations refer to works on the external repairs schedule

