

STREET - M ROAD LANTERN

IP66   


The Street Led fixture is a multi-use luminaire designed to meet the highest of specifications with both high efficiency and performance.

The cast aluminium fixture is fitted with high temperature toughened safety glass and incorporates the latest in led technology and optics.

Three luminaire sizes are available with a large range of lumen outputs and wattages which incorporates five optic variants resulting in excellent performance making the fixture suitable for various external applications.



A universal bracket is supplied as standard making the fixture suitable for either horizontal or post top mounting, the relevant brackets and spigots can also be supplied on request.

Product Code	ST/M
Input Wattage	31W - 56W
Color Temperature	4000K
Luminous Flux	3075-5800 LM
Input Voltage	AC230V
Frequency Range	50Hz
Power Factor	RF≥0.95
Colour Rendering Index	RA≥70
Temperature of Working Condition	-40-50°C
Humidity of Working Condition	20%-90%RH
LED Lifetime	50000H
Protection Grade	IP66
Spigot Diameter	Φ60mm
Installation Height	6-8m
Net Weight	5.5kg
Gross Weight	6.0kg
Packing Size	710*350*130mm

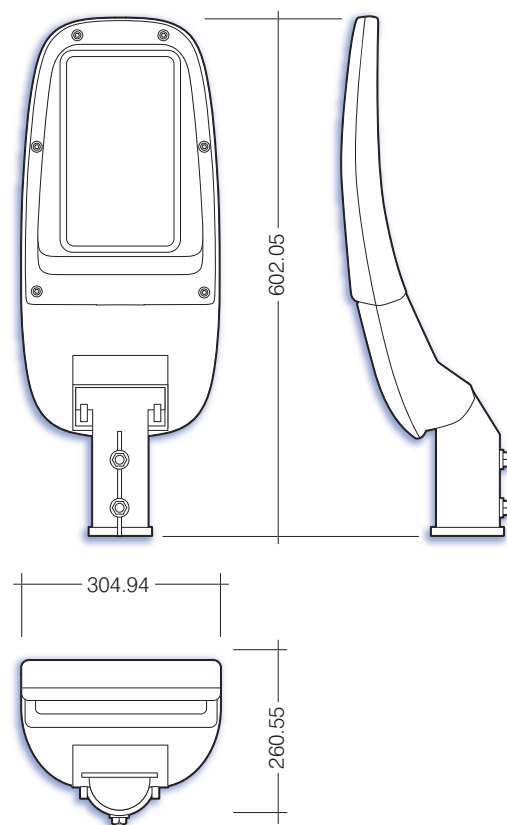


STREET - M ROAD LANTERN

IP66

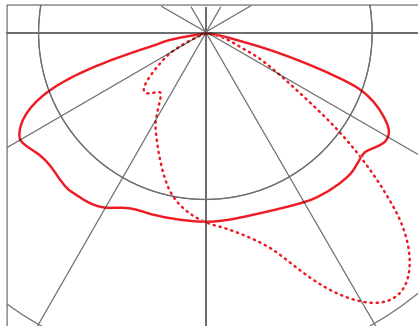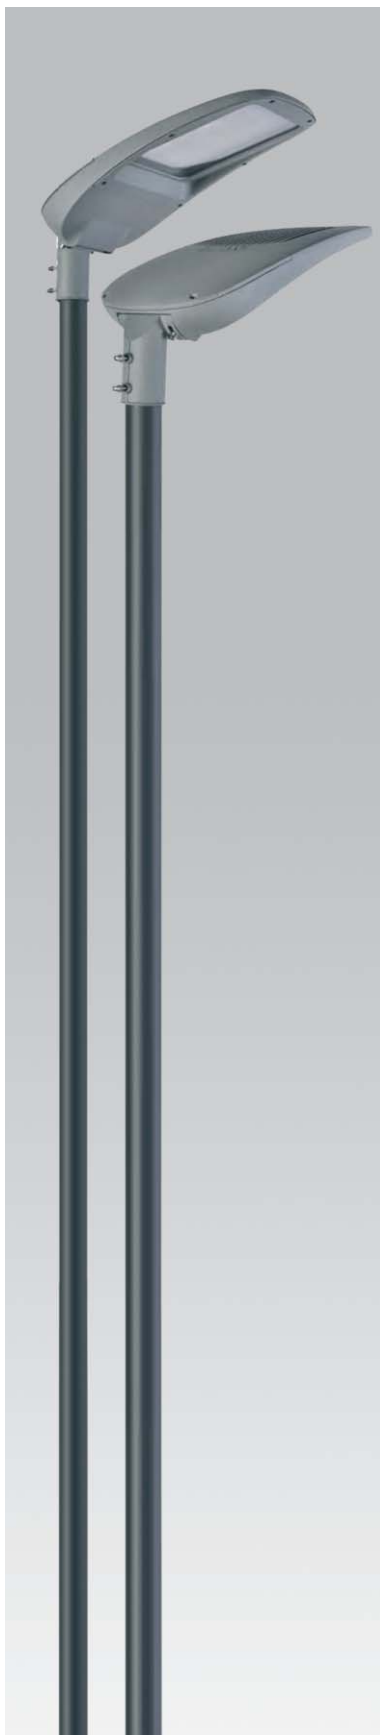


L1 STANDARD LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/M/L1/3200/74	3199	31	104
ST/M/L1/3600/74	3645	36	102
ST/M/L1/4200/74	4190	41	103
ST/M/L1/4600/74	4576	45	101
ST/M/L1/5100/74	5132	51	101
ST/M/L1/5500/74	5534	56	99

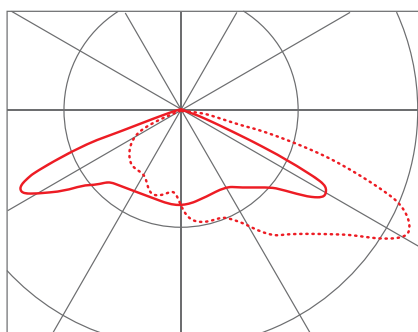


L2 WIDE LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/M/L2/3200/74	3236	31	105
ST/M/L2/3800/74	3765	36	105
ST/M/L2/4200/74	4209	41	104
ST/M/L2/4500/74	4528	46	99
ST/M/L2/5100/74	5131	51	101
ST/M/L2/5300/74	5336	56	96

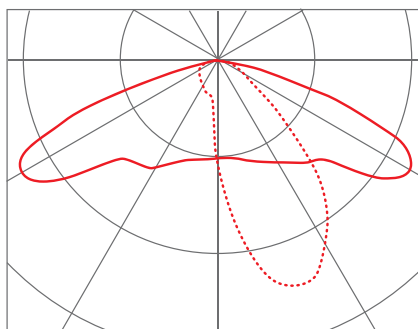


L3 STREET LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/M/L3/3400/74	3369	31	109
ST/M/L3/3900/74	3857	36	108
ST/M/L3/4400/74	4382	41	108
ST/M/L3/4900/74	4887	46	107
ST/M/L3/5400/74	5381	51	106
ST/M/L3/5800/74	5806	56	104

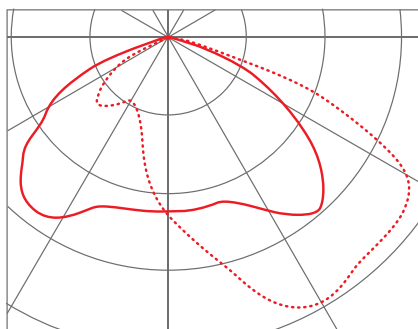

L4 FLOOD LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/M/L4/3200/74	3177	31	103
ST/M/L4/3600/74	3562	36	100
ST/M/L4/3900/74	3949	41	97
ST/M/L4/4500/74	4486	46	98
ST/M/L4/5000/74	4969	51	98
ST/M/L4/5500/74	5466	56	98

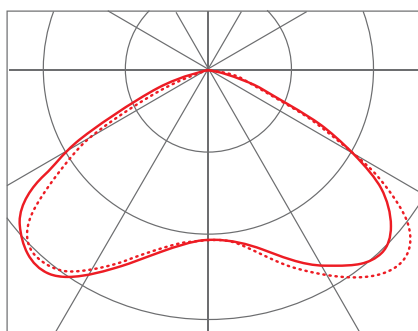

L5 CIRCULAR LENS

Part No.	Lumens	Wattage	Lumens/Watt
ST/M/L5/3100/74	3075	31	100
ST/M/L5/3600/74	3623	36	102
ST/M/L5/4000/74	3976	41	98
ST/M/L5/4500/74	4549	46	100
ST/M/L5/4900/74	4916	51	97
ST/M/L5/5400/47	5406	56	97


Light Distribution Ltd