




- 1 existing brickwork to be cleaned (method tbc)
- 2 new PPC aluminium windows
- 3 existing stone cills to be cleaned (method tbc)
- 4 slate roof re-laid with reclaimed tiles
- 5 existing stone copings to be repaired/replaced where necessary
- 6 existing timber doors repaired and re-instated
- 7 new PPC opening vents as part of window system
- 8 new PPC sleeve surround for new aluminium windows
- 9 new extension with black stained timber rainscreen cladding and glazed front
- 10 new timber gates to match cladding
- 11 mature trees
- 12 new timber door to existing escape stair
- 13 new cast iron rainwater downpipe + hopper
- 14 new circular vent for MVHR intake/extract

note
all windows are drawn with common fenestration. this may change pending further investigation

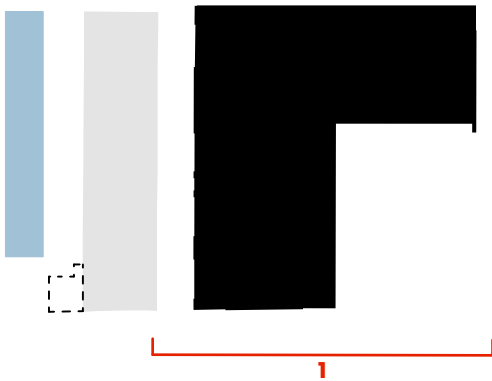

minshull house proposed elevation 01 • chorlton street

MINSHULL HOUSE
'CHORLTON SQUARE'

d • planning issue	20.01.17 • ch • him
c • draft planning issue	10.11.16 • him • ms
b • work stage 2	28.07.16 • ejd • him
a • draft work stage 2	14.07.16 • ejd • him
• first issue	04.07.16 • him • ms
rev • description	issued • drawn • checked

shedkm	+44 (0)151 709 8211 +44 (0)207 253 8881
project	kampus • listed buildings
client	ASDL
drawing number	AW(00)237d
scale	1:100 @ a1
status	work stage 3

minshull proposed short elevation 01
do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately