


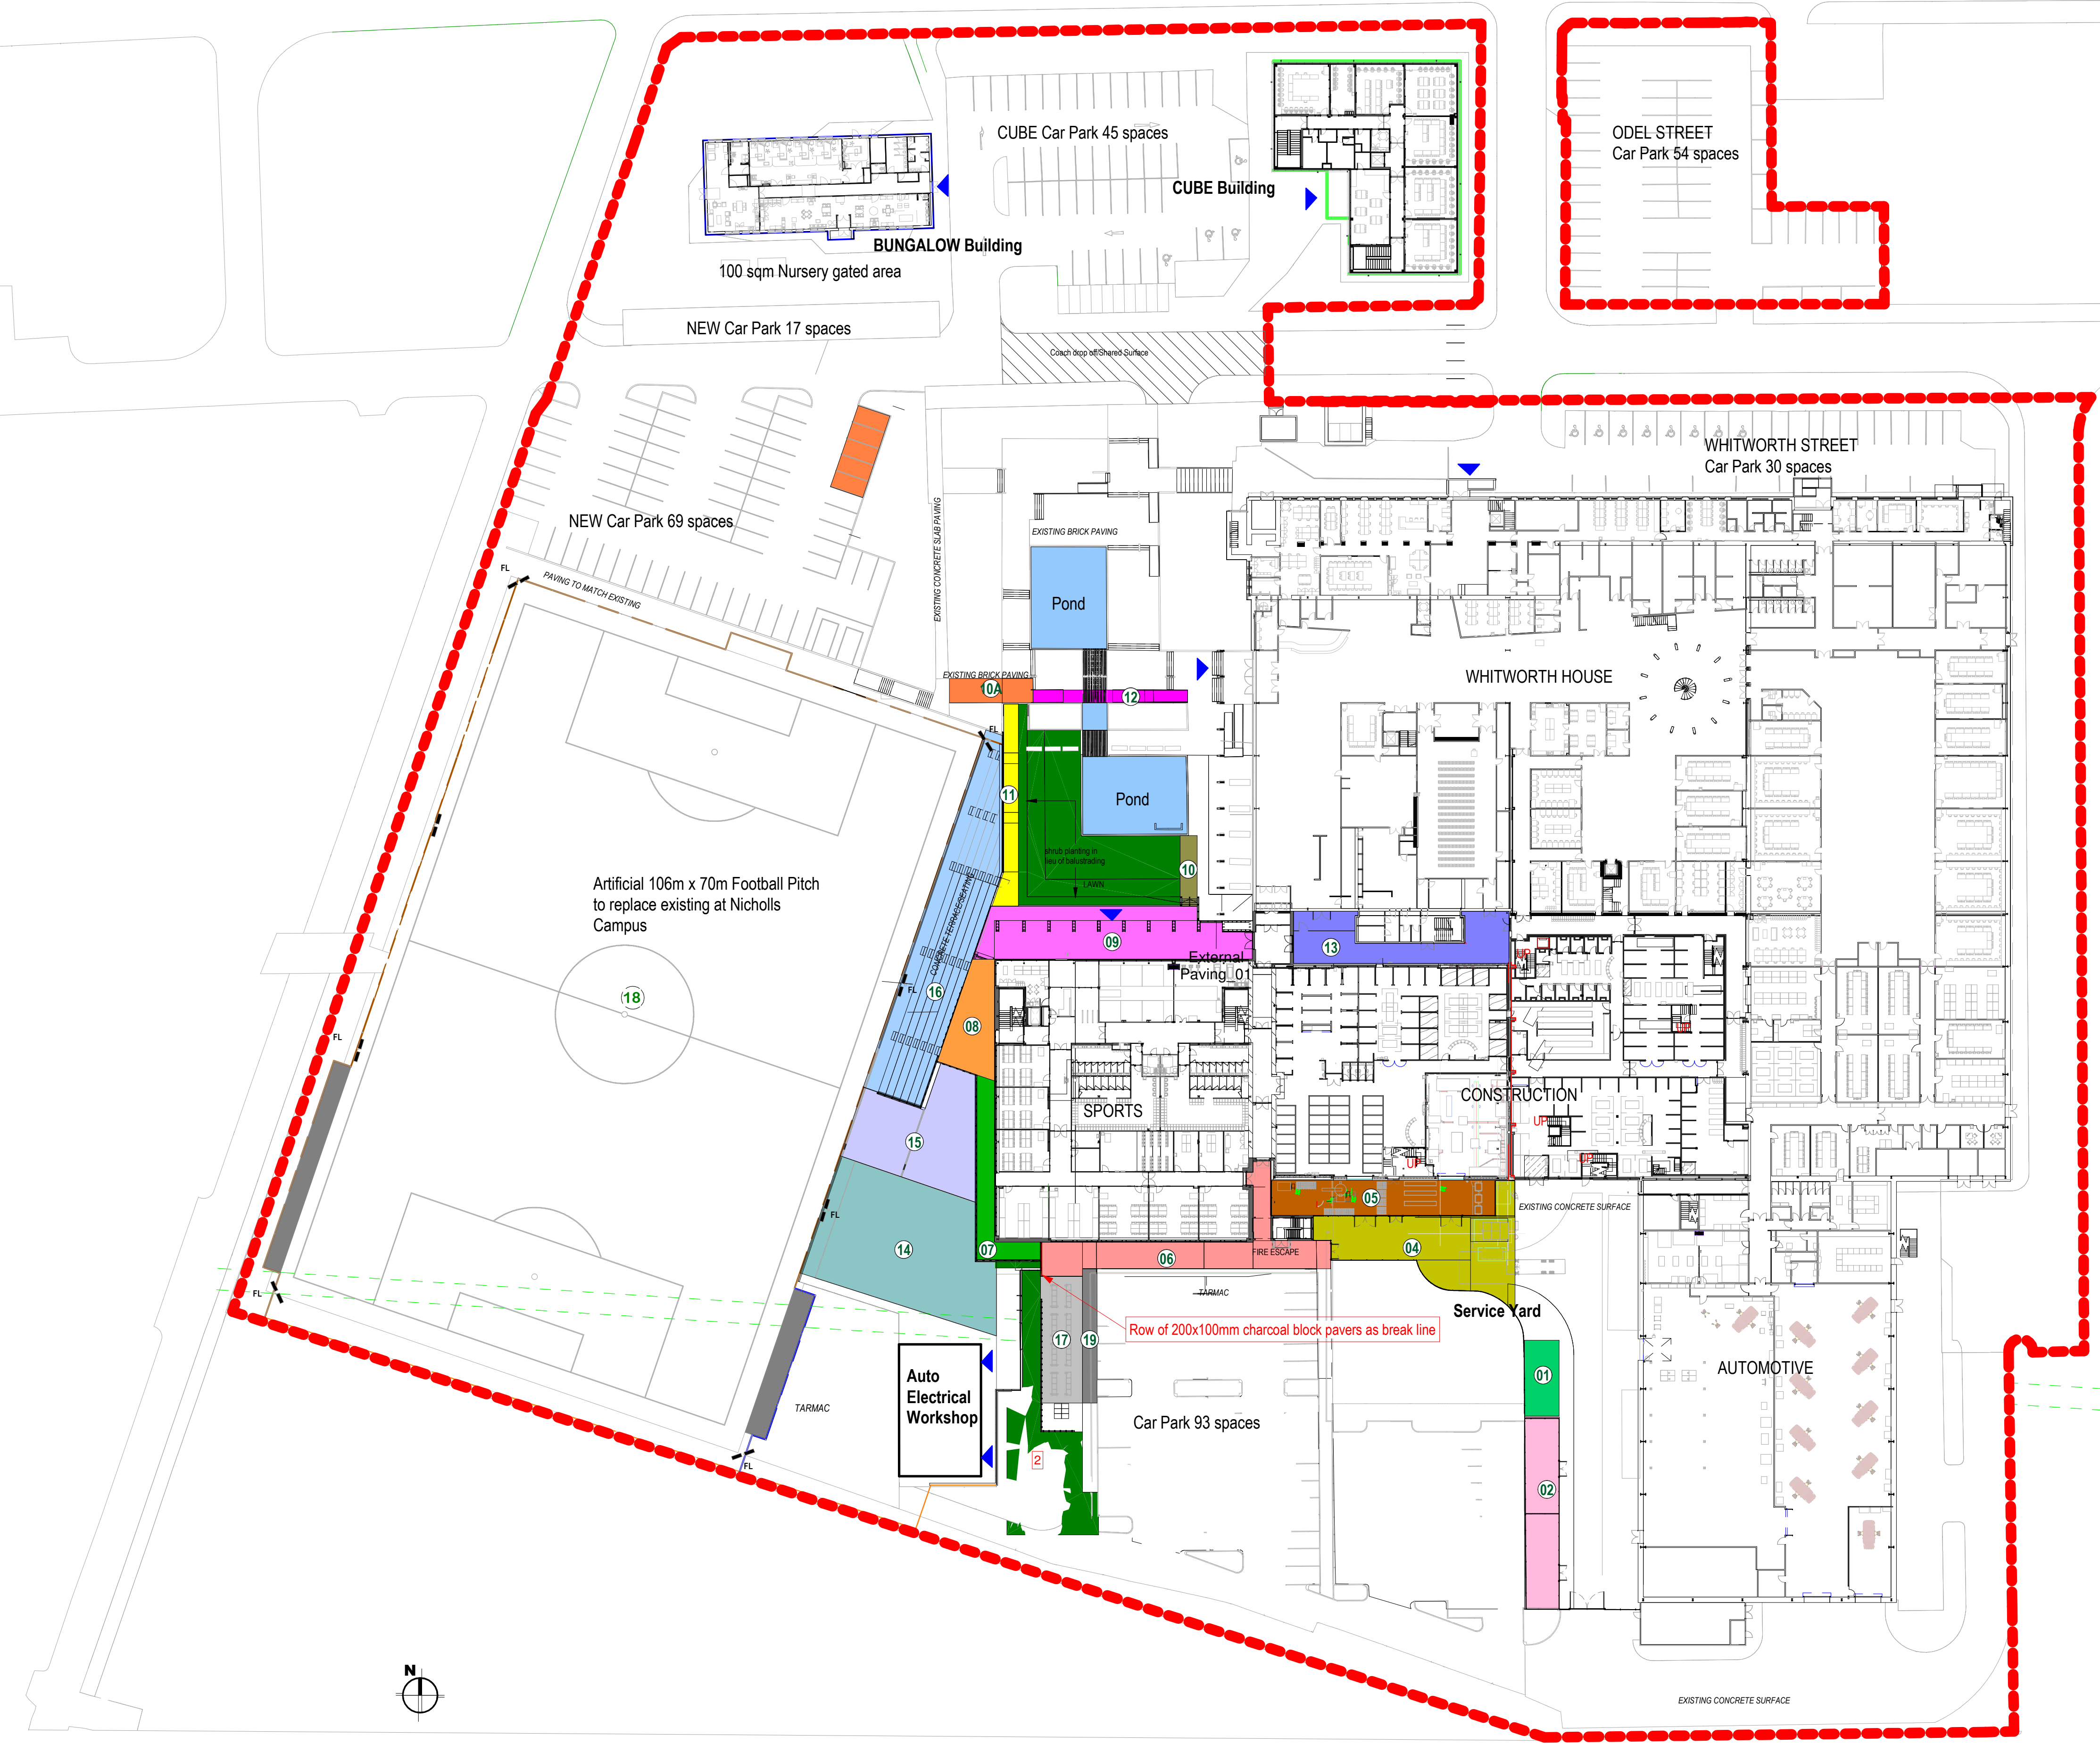

- INDICATES SITE BOUNDARY**
- 01. BIN STORE - SKIPS: Storage area for large skips, open to yard area, accessed at 45 degrees by forked skip truck. Fenced to separate from Car park. Existing slab with kerbs to rear. No Fencing Allowed.
 - 02. BIN STORE & YARD: Fenced compound to house wheelie / euro bins. Existing RC Concrete Slab with kerbs to rear. Fencing: 3.1m high Arco Type RL mild steel powder coated grating & 3 x gates to perimeter of bin store. 2400mm high close board timber fence to rear and 1800mm high to sides & front plus 1 pair of gates to each of the two compounds.
 - 03. OMITTED.
 - 04. NEW YARD AREA TO CONSTRUCTION WORKSHOP: Yard area: New RC Concrete Slab with kerbs to rear, as BDP mark-up, rec'd on TQ158 from PF Dec 2019. New concrete slab to revised levels. Remove existing concrete and brush finish.
 - 05. COMPOUND AREA UNDER CANOPY: New Construction Workshop compound, housing mortar mixing plant, dust extraction unit, timber storage, Security fenced. Remove Existing. New RC Concrete Slab, as BDP mark-up, rec'd on TQ158 from PF Dec 2019. Fencing as RDS CE 17 C5 (22118 to be updated) ; Darfen triton 2.4m high open mesh fence & gates.
 - 06. SPORTS HALL: PAVING REAR ELEVATION: Paving to rear elevation of Sports hall & Tie in to cut-back car park. 600 sq x 50mm PCC stgd grey paving slabs. New half batter kerb to cut edge of cut back car park + 2No drop crossings
 - 07. RAISED WALKWAY: Elevated walkway at G floor level, over entrance to LG Changing rooms, Incl' barrier fencing. 600x600 std 50mm PCC grey paving slabs on raised spacers/pedestals on tanked concrete membrane.
 - 08. PAVING TO TOP OF TERRACE: 600x600 std 50mm PCC grey paving slabs on raised spacers/pedestals on tanked concrete membrane.
 - 09. PAVING TO SPORTS HALL COLONADE: Paving to Colonnade area to front of new Sports Hall & tie into existing, partially outside original defined work area. 400x400mm tobermore mayfair with 1 x row of marshals Charcoal 100x200x50mm block paver on each column line plus charcoal key kerb edgings.
 - 10. NEW STAIR & PAVING: new pcc stairs with gradus nosings, remove and relay existing tegular block from area 10A and replace with grey 600x600mm paving slabs
 - 10A. NEW STAIR & PAVING: Replace existing tegular block from area and relocate and lay to 10 and replace with grey 600x600mm paving slabs
 - 11. RAMP TIE IN ADJACENT TERRACE: tegular block pavers with marshals charcoal grey kerb edging.
 - 12. ACCESS RAMP ADJACENT TO POND: Access ramps. Tegular block pavers to match existing.
 - 13. EXISTING FIRE EXIT ROUTE: Existing escape route. Hard Surface finish to be RC concrete and brush finish.
 - 14. LANDSCAPING ABOVE ATTENUATION TANK: Soft Landscape finish. Top soil & turf
 - 15. HARD LANDSCAPE FROM CHANGING ROOM TO TERRACE AREA: to be 80mm pedestrian Block paving in charcoal 100x200 marshals
 - 16. TERRACE SEATING: Terrace seating, with pitch Run off area & associated balustrading. Plain Grey PCC terrace units with sit-on step units, on steel support. Handrail to be stainless steel.
 - 17. CYCLE STORE & PAVING: Refer to drawing 10481. Broxap Coventry Gullwing cover, with 40No Sheffield Cycle hoops. brushed concrete slab finish.
 - 18. FENCING TO FOOTBALL PITCH ?: Football pitch fencing. 4.5m high enclosure to 3G pitch Refer to Phase Works.
 - 19. PATHWAY ADJACENT TO CYCLE STORE: 600x600mm flags as 06.

1 Proposed - Landscape Zoning Plan
1 : 500

REV	DATE	REVISION NOTE	BY	CHECK
C3	21.08.16	Notes updated to reflect comments received	SR	MG
C2	21.08.16	Hand-drawn updates to reflect comments received	SR	MG
C1	21.07.26	New Drawing to replace OC-EWA-ZZ-GA-A-10310_Landscape Zoning Plan (2602_A030311)	SR	MG