


Spirally Wound Duct

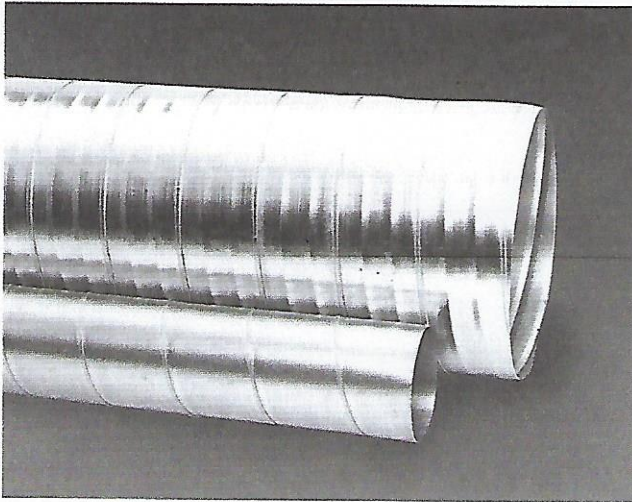

Description


Lindab spirally wound ducting is manufactured from high quality galvanised steel and is produced to comply with HVCA specification DW144 and is suitable for high, medium, low and negative pressure systems.

Available as standard 3m lengths in Eurovent sizes from 80mm to 2000mm this quality ducting is complemented by Lindab's comprehensive range of Vent and Safe fittings.

Item Code (3m length)	Diameter mm	Area M ²	Circumference M	Material thickness mm	Weight Kg/M	Weight Kg/ 3M
SS080	80	0.005	0.251	0.5	1.14	3.42
SS100	100	0.008	0.314	0.5	1.43	4.29
SS125	125	0.012	0.393	0.5	1.78	5.34
SS150	150	0.018	0.471	0.5	2.14	6.42
SS160	160	0.020	0.503	0.5	2.28	6.84
SS180	180	0.025	0.566	0.6	3.08	9.24
SS200	200	0.031	0.629	0.6	3.42	10.26
SS224	224	0.039	0.704	0.6	3.83	11.50
SS250	250	0.049	0.786	0.6	4.27	12.81
SS280	280	0.062	0.880	0.6	4.78	14.34
SS300	300	0.071	0.943	0.6	5.13	15.39
SS315	315	0.078	0.990	0.6	5.38	16.14
SS355	355	0.099	1.116	0.8	8.08	24.24
SS400	400	0.126	1.257	0.8	9.10	27.30
SS450	450	0.159	1.414	0.8	10.24	30.72
SS500	500	0.196	1.571	0.8	11.37	34.11
SS560	560	0.246	1.760	0.8	12.74	38.22
SS600	600	0.283	1.886	0.8	13.66	40.98
SS630	630	0.312	1.980	0.8	14.34	43.02
SS710	710	0.396	2.231	0.8	16.15	48.45
SS800	800	0.503	2.514	0.8	18.20	54.60
SS900	900	0.636	2.829	1.0	25.58	76.74
SS91000	1000	0.786	3.143	1.0	28.43	85.29
SS91120	1120	0.986	3.520	1.2	40.58	121.74
SS91250	1250	1.228	3.929	1.2	45.28	135.84
SS91422	1422	1.589	4.469	1.2	50.73	152.19
SS91500	1500	1.768	4.714	1.2	54.35	163.05
SS91600	1600	2.011	5.029	1.2	57.97	173.91
SS92000	2000	3.143	6.286	1.2	72.45	217.35

All above are nominal dimensions and weights.

SR Cutter

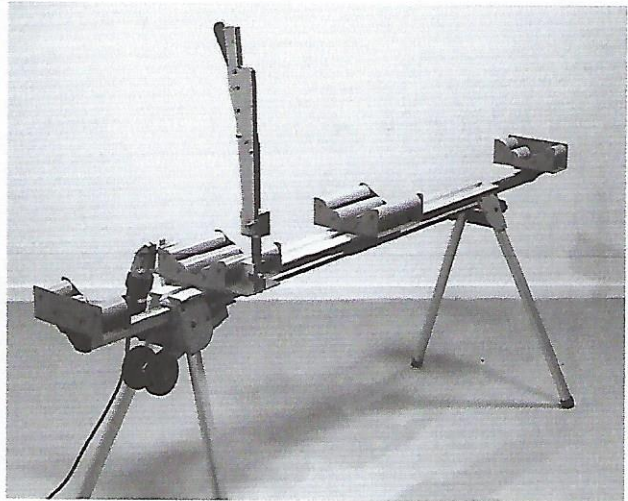

Description

For accurate and safe onsite cutting of spirally wound ducting Lindab's new SR cutter provides an ergonomically designed solution. With less noise than conventional cutting methods and no sparks this portable cutter provides a safe neat accurate cut every time.

The SR cutter will cut ducts up to 0.9mm thick and from 80mm to 315mm diameter and folds up quickly and neatly for transportation.

Available in 110v and cordless rechargeable versions.

