


Window schedule to be read in conjunction with the Window and Door Repair Schedule

3521_Window Schedule Basement												
Mark	Type Mark	Level	Comments	Count	Head Height	Rough Height	Rough Width	Sill Height	New	Existing	Heritage Window	C20 Window
WB1	W1	-01 Basement	New window with slimline double glazed sealed units (G)	1	2300	1750	1135	550	Yes	No	No	Yes
WB2	W1	-01 Basement	New window with slimline double glazed sealed units (G)	1	2300	1750	1135	550	Yes	No	No	Yes


3521_Window Schedule Ground Floor												
Mark	Type Mark	Level	Comments	Count	Head Height	Rough Height	Rough Width	Sill Height	New	Existing	Heritage Window	C20 Window
WG2	W2	00 Ground Floor	Extg window refurbished with slimline double glazed sealed units (G)	1	3165	2175	1135	990	No	Yes	Yes	No
WG1	W2	00 Ground Floor	Extg window refurbished with slimline double glazed sealed units (G)	1	3165	2175	1135	990	No	Yes	Yes	No
WG3	W3	00 Ground Floor	Window WG3 removed and cill wall reduced to floor level. reveal of opening to be lined. (Rev K)	1	2325	2325	1135	0	No	Yes	Yes	No

Key to location of window types

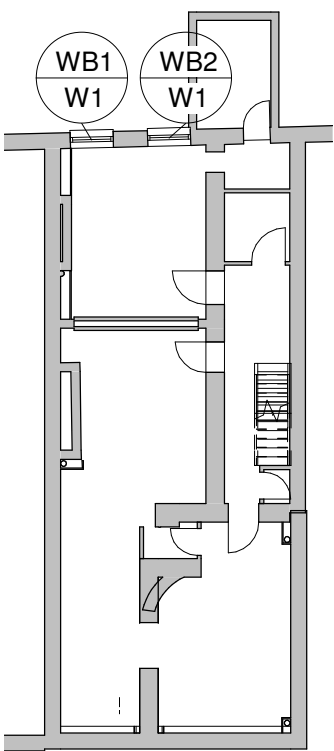


Basement Plan Proposed

1 : 200

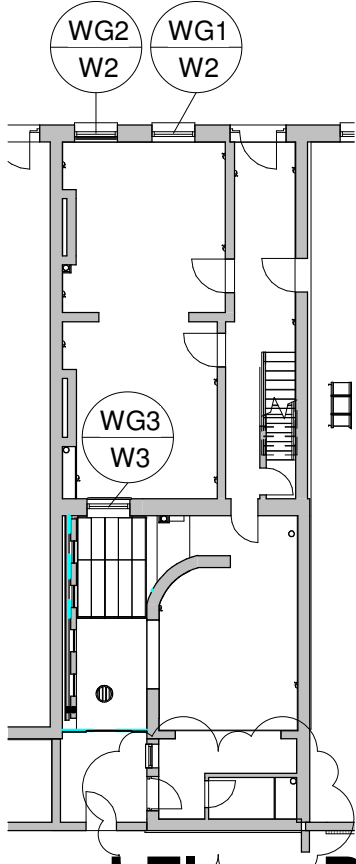


Ground Floor Plan Proposed

1 : 200

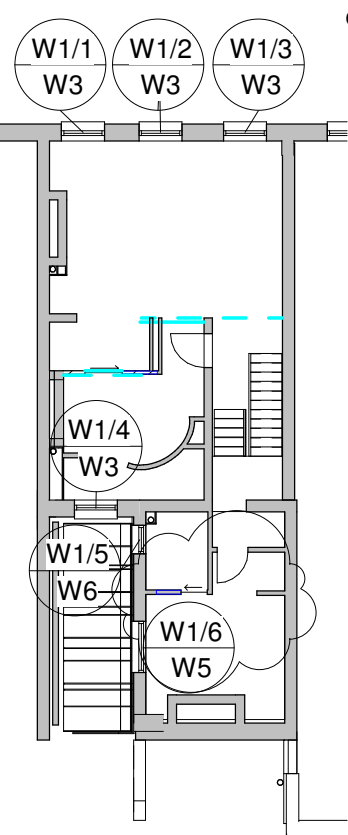

First Floor Plan Proposed

1 : 200

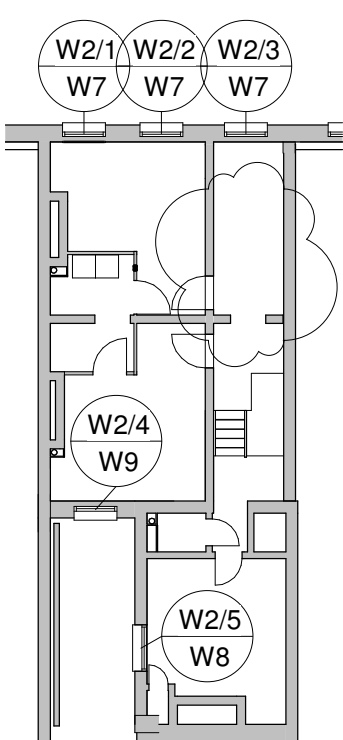


Second Floor Plan Proposed

1 : 200

DO NOT SCALE FROM THIS DRAWING
ALL DIMENSIONS MUST BE CHECKED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION

3521_Window Schedule First Floor													Notes
Mark	Type Mark	Level	Comments	Count	Head Height	Rough Height	Rough Width	Sill Height	New	Existing	Heritage Window	C20 Window	
W1/1	W3	01 First Floor	Extg window refurbished with slimline double glazed sealed units (G)	1	3065	2325	1135	740	No	Yes	Yes	No	Existing historic windows to be repaired and overhauled. Existing rebates to frames and astragals are to be carefully routed out approximately 5mm to suit new 12mm Pilkington's slimline double glazed, sealed units with toughened glass outer pane (Rev G).
W1/2	W3	01 First Floor	Extg window refurbished with slimline double glazed sealed units (G)	1	3065	2325	1135	740	No	Yes	Yes	No	Existing historic windows to be repaired and overhauled. Existing rebates to frames and astragals are to be carefully routed out approximately 5mm to suit new 12mm Pilkington's slimline double glazed, sealed units with toughened glass outer pane (Rev G).
W1/3	W3	01 First Floor	Extg window refurbished with slimline double glazed sealed units (G)	1	3065	2325	1135	740	No	Yes	Yes	No	Existing historic windows to be repaired and overhauled. Existing rebates to frames and astragals are to be carefully routed out approximately 5mm to suit new 12mm Pilkington's slimline double glazed, sealed units with toughened glass outer pane (Rev G).
W1/4	W3	01 First Floor	New window with slimline double glazed sealed units (G)	1	3065	2325	1135	740	Yes	Yes	No	Yes	Astragal profile is thicker than that used in the heritage windows. The shape of the astragal is crudely splayed and does not match the refined ovolo/lambs tongue section of the heritage windows.
W1/6	W5	01 First Floor	Extg window refurbished with slimline double glazed sealed units (G)	1	2092	1750	1350	342	No	Yes	No	Yes	Existing windows to be repaired and overhauled. Existing rebates to frames and astragals are to be carefully routed out approximately 5mm to suit new 12mm Pilkington's slimline double glazed, sealed units with toughened glass outer pane (Rev G).
W1/5	W6	01 First Floor	New window with slimline double glazed sealed units (G)	1	2272	1750	750	522	Yes	Yes	No	Yes	



H	03.06.21	MP	Amended for revised planning application
G	27.05.20	AP	Revised for Planning
F	09/01/20	HP	Amendmenst shown in blue
E	03/12/19	HP	Amendments following Interior Designer comments
D	08/11/19	LT	Clarification on evidence of C20 windows being non-heritage
C	25/10/19	LT	Clarification on extent of works to window WG3 of window type W3
B	24/10/19	LT	Clarification for window mark of type W3 with varying spec
A	23/10/19	LT	Specification for Window Type W3 amended
Rev	Date	Int	Description



Client:

Nilesh Bhatt

Project:

13 St John Street,
Manchester

Description:

Window Schedule

Purpose of Issue:

Building Regulations

Drawn By: Checked By: Date: Scale @ A2:

LT VS 14/10/19

Job No: Status Code: Drawing No: Rev:
3521 S2 227 H

File Identifier:

SJ-BTP-00-SH-DR-A-3521_227

Elizabeth House, 486 Didsbury Road, Heaton Mersey, Stockport, SK4 3BS
t 0161 443 1221 e info@bernardtaylor.co.uk w www.btparchitects.co.uk