

##

SITE SPECIFIC HAZARDS

IN ADDITION TO THE RISKS NORMALLY ASSOCIATED WITH THIS TYPE OF WORK TAKE NOTE OF THE FOLLOWING:

NOTE: THE NUMBERS REFER TO THE HIGHWAY DESIGNER'S RISK ASSESSMENT FOUND IN DOCUMENT NO. 766-016-DRA-WLD-DOC-C-002.

01

WORKING ADJACENT TO STATUTORY UNDERTAKERS EQUIPMENT/ SERVICES.

02

WORKING ADJACENT TO LIVE TRAFFIC

03

ROUTES FOR PEDESTRIANS

04

ACCESS TO SITE

05

NEEDLE STICK INJURIES

06

MUD AND DEBRIS ON PUBLIC HIGHWAY

07

CONTROL OF NOISE, DUST OR VIBRATION

08

WORKING FROM HEIGHT OR ON EMBANKMENTS

09

PLANT MOVEMENTS

10

HOT THERMOPLASTIC MATERIALS

11

BIOLOGICAL HAZARDS

12

MANUAL HANDLING

13

ANTISOCIAL BEHAVIOUR

THESE HAZARDS ARE SITE WIDE

01

04

05

06

07

08

09



10

11


12



200 SERIES: SITE CLEARANCE

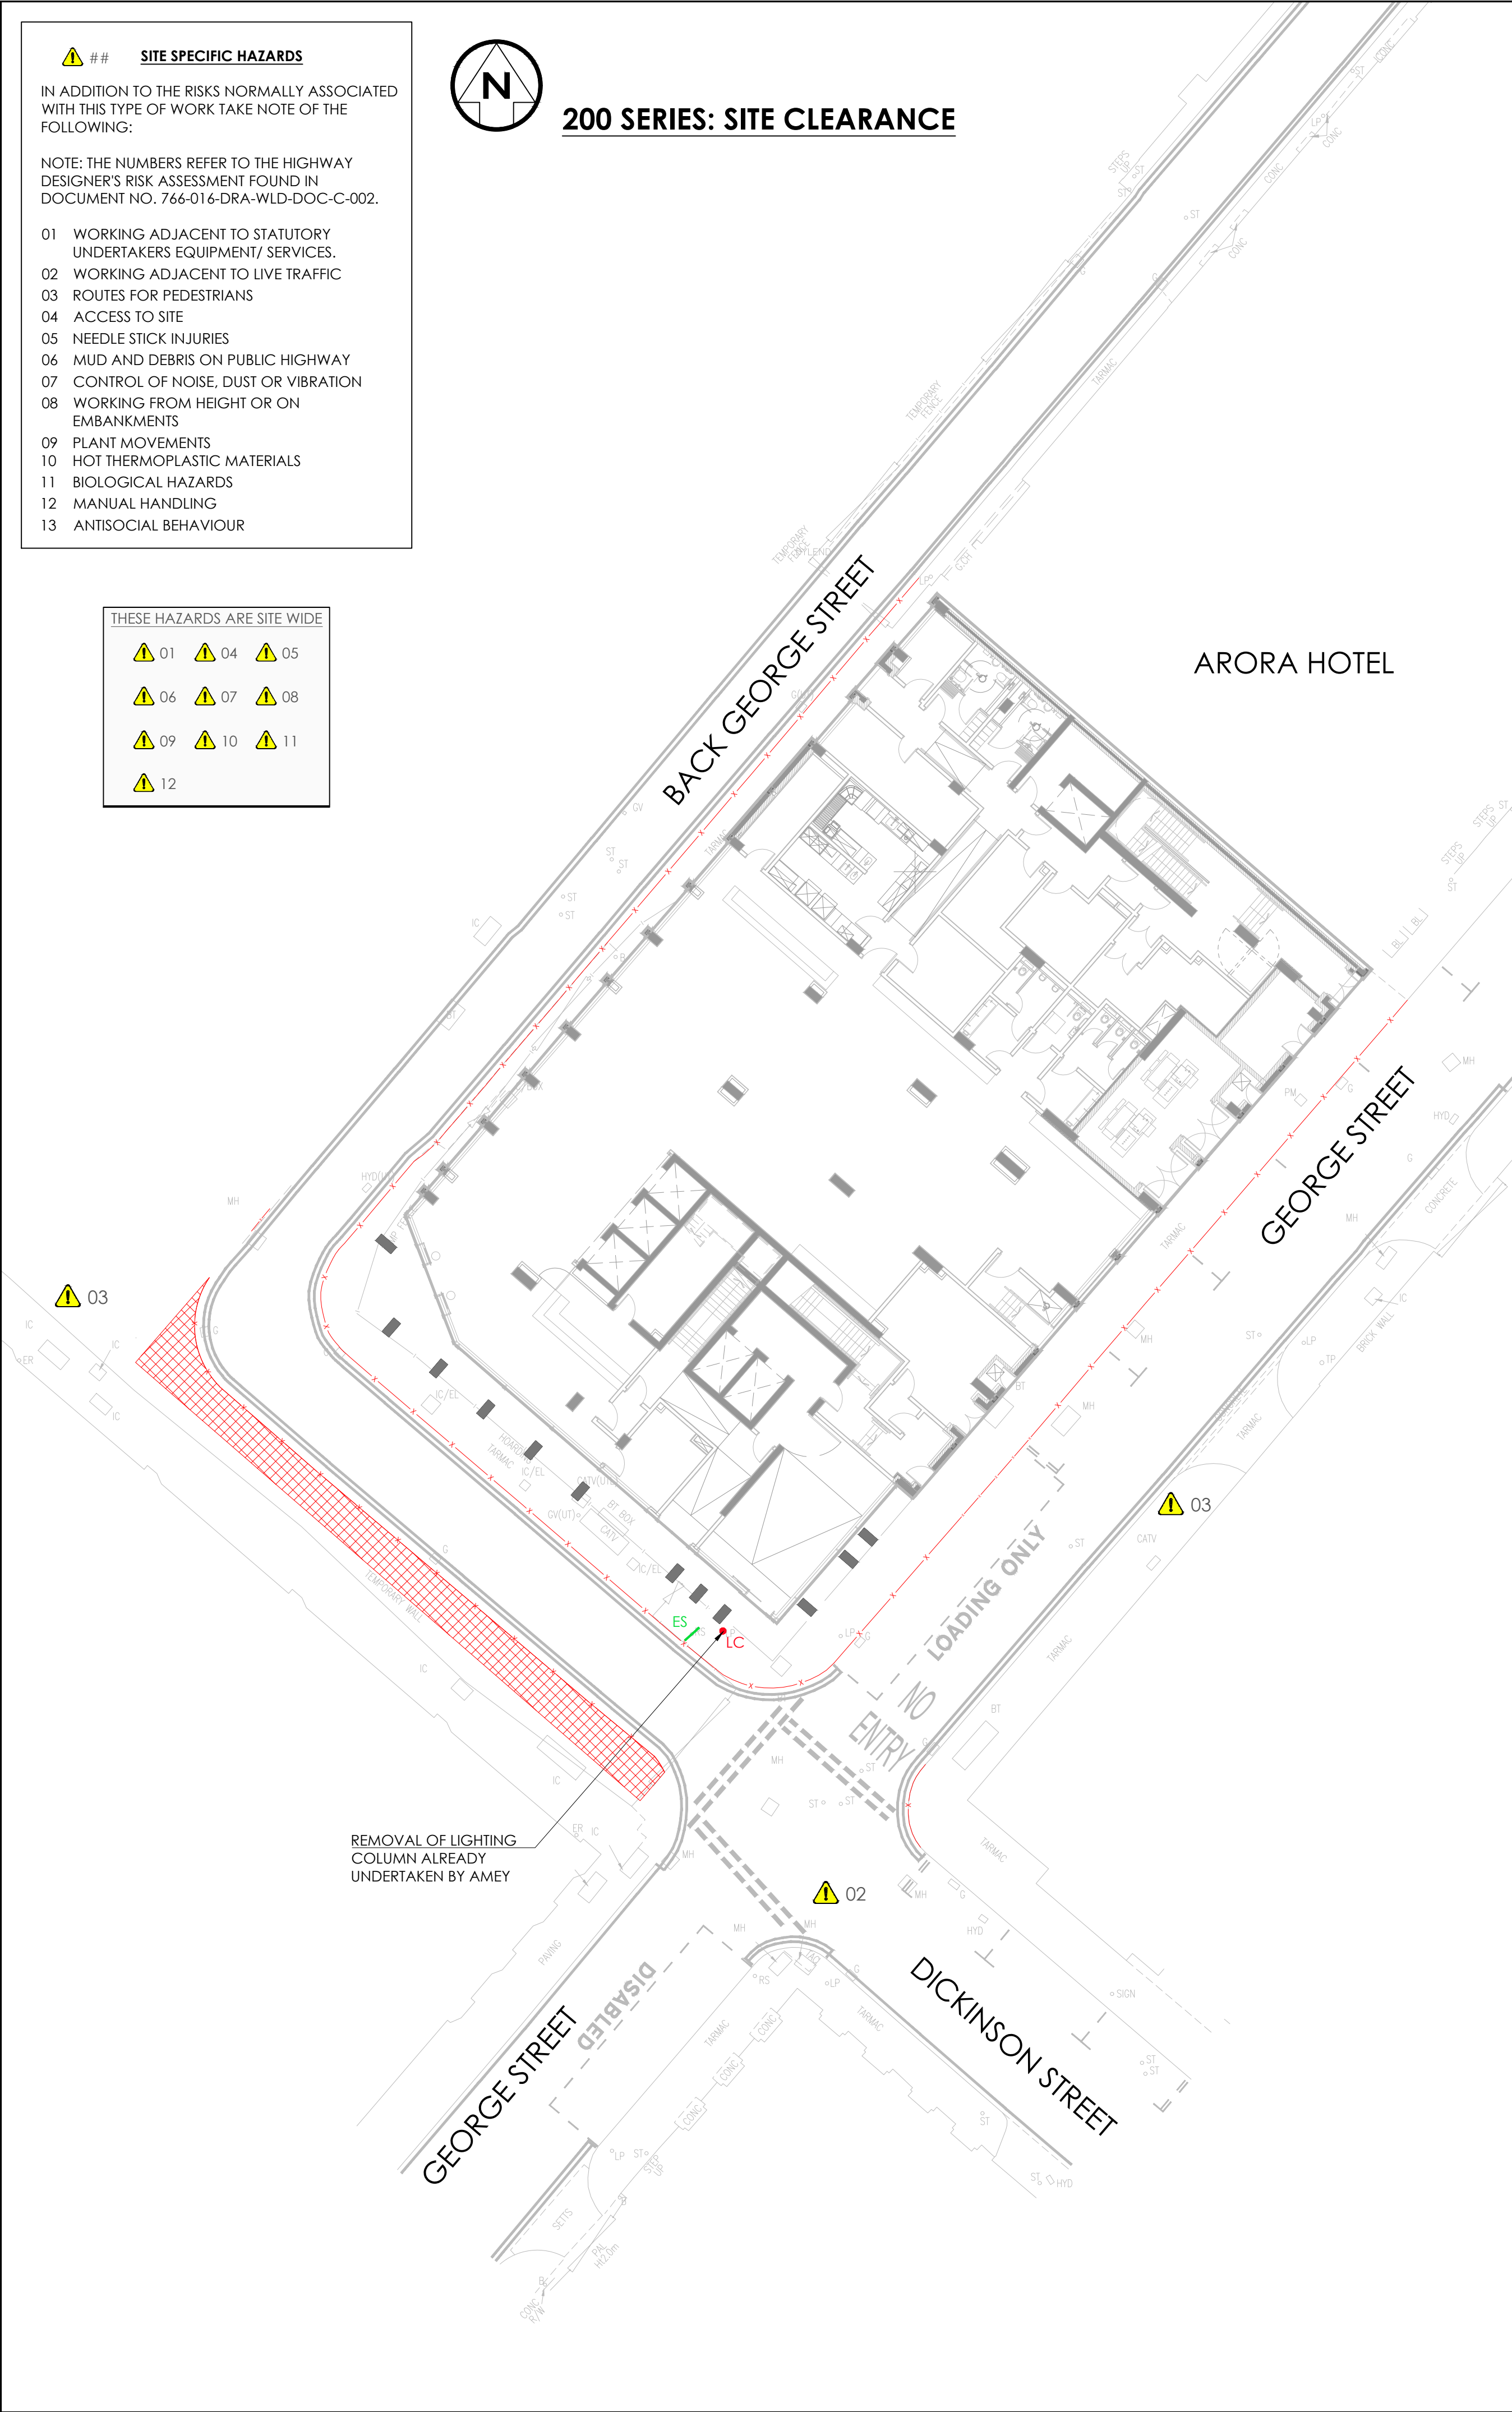

600 SERIES: EARTHWORKS

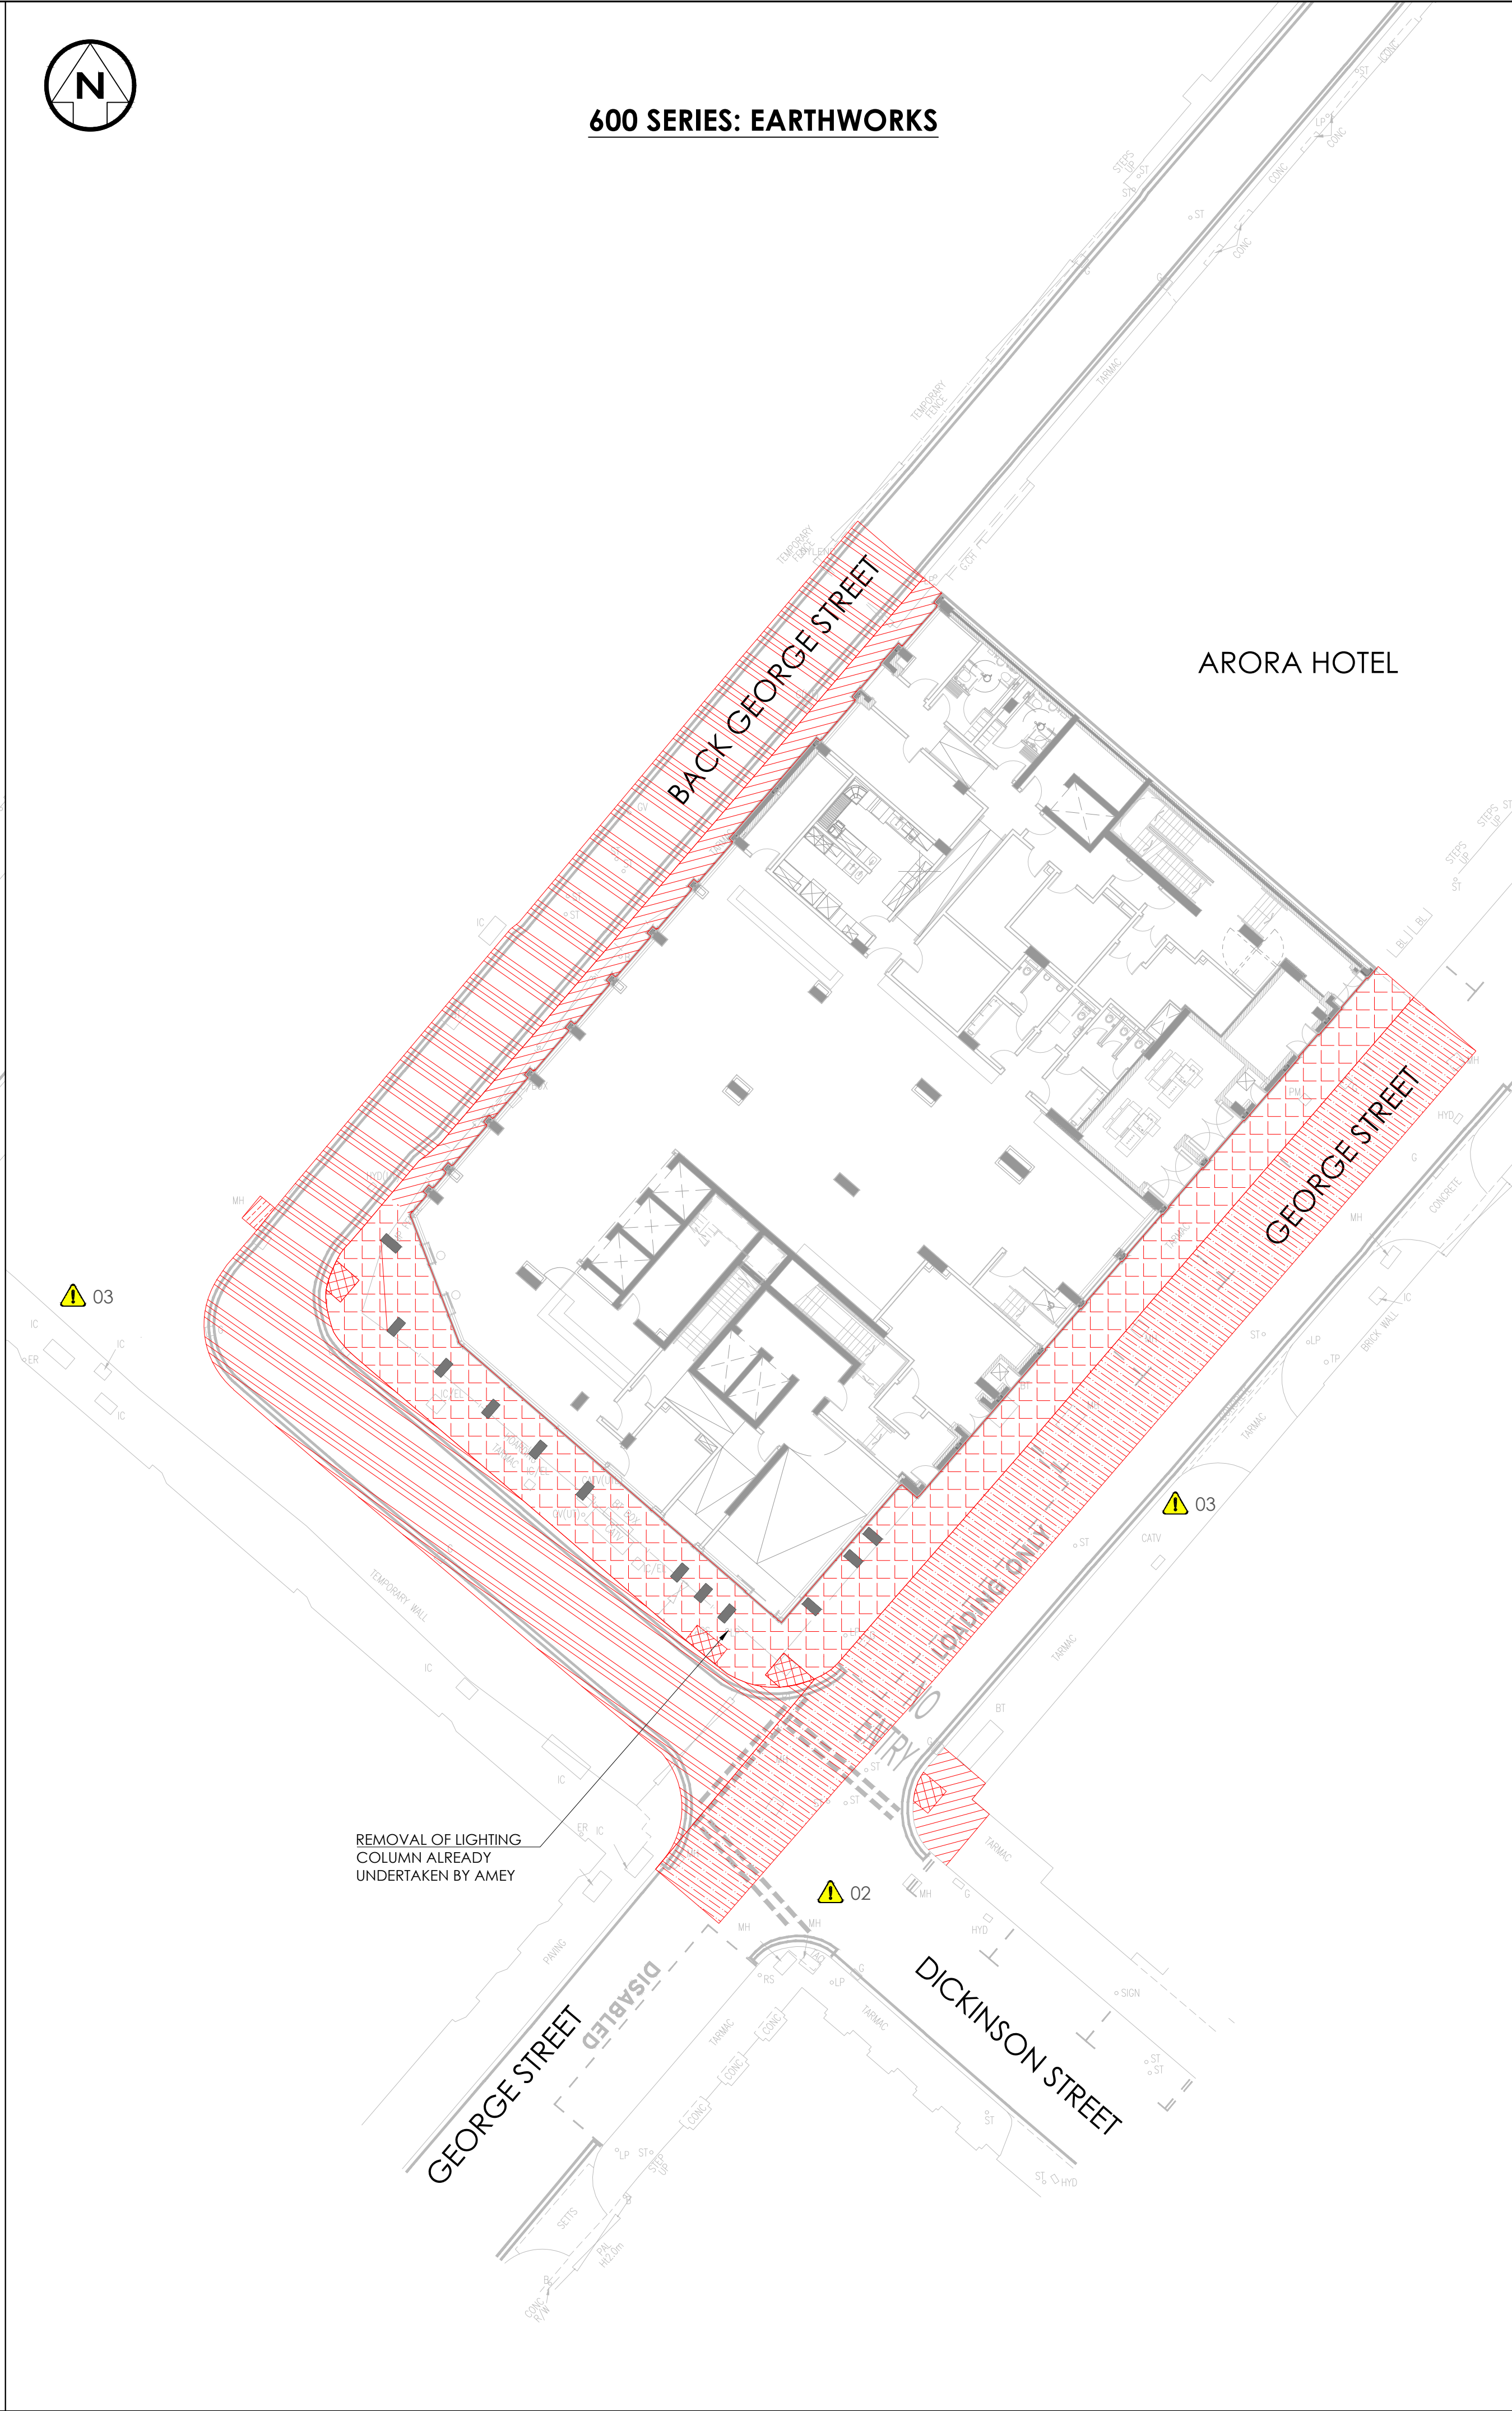

- NOTES – GENERAL**
- 1) ALL DIMENSIONS ARE STATED IN MILLIMETRES UNLESS NOTED OTHERWISE.
 - 2) ALL LEVELS ARE STATED IN METRES.
 - 3) ALL DIMENSIONS, LEVELS AND CO-ORDINATES ARE BASED UPON TOPOGRAPHICAL SURVEY DRAWING (NO. 50183/1) BY MALCOLM HUGHES DATED AUGUST 2017 & LEVELS TAKEN FROM SITE BY RUSSELLS ON JULY 2020 DRAWING (LRW-7566-L(90)02L).
 - 4) DO NOT SCALE. PLEASE REFER ANY QUERIES TO THE PROJECT MANAGER / SUPERVISOR.

- NOTES – SERIES 200: SITE CLEARANCE**
- 1) IN ADVANCE OF TAKING UP OR DOWN ANY LIGHTING, SIGNAGE, CABINETS OR FURNITURE AND THE LIKE WITH AN ELECTRICAL / MAINS SUPPLY, THE CONTRACTOR IS TO ENSURE PRIOR SAFE ISOLATION / DISCONNECTION FOR SAFE REMOVAL. ALL WORKS TO BE UNDERTAKEN IN ACCORDANCE WITH THE CONTRACTORS OWN SAFE ISOLATION PROCEDURE.
 - 2) THIS DRAWING IS TO BE READ IN COLOUR.
 - 3) GREEN, BLUE, AND RED IS USED TO INDICATE STORAGE / REMOVAL REQUIREMENTS FOR CLEARANCE ITEMS.

- KEY – SERIES 200: SITE CLEARANCE**
- I1 – TAKE UP OR DOWN AND SET ASIDE FOR REUSE
I2 – TAKE UP OR DOWN AND REMOVE TO STORE OFF SITE
I3 – TAKE UP OR DOWN AND REMOVE TO TIP OFF SITE

- I12 PAVED AREAS AND THE LIKE
- I12 YORKSTONE PAVING FLAGS – 900 X 600mm
- I14 KERBS, CHANNELS, EDGINGS, COMBINED DRAINAGE AND KERB BLOCKS, LINEAR DRAINAGE CHANNEL SYSTEMS, FENCING, SAFETY BARRIERS, VEHICLE PARAPETS, TRANSITIONS, TERMINALS, PEDESTRIAN GUARDRAILS AND PEDESTRIAN PARAPETS AND THE LIKE
- KERBING — P.C.C
— CHANNEL — P.C.C
— EDGINGS — P.C.C

- I17 ROAD LIGHTING COLUMNS, BRACKETS AND WALL MOUNTINGS, TRAFFIC SIGN, GATES, STILES, STREET FURNITURE, ROAD STUDS AND THE LIKE
- LC LIGHTING COLUMN (FOR DETAILS ON STREET LIGHTING REFER TO STREET LIGHTING DRAWINGS)
—EUS TRAFFIC SIGN (UNLIT)
—EIS TRAFFIC SIGN (LIT)

- KEY – SERIES 600: EARTHWORKS**
- EXCAVATE BITUMINOUS MATERIAL FOR FLEXIBLE FOOTWAY CONSTRUCTION TO A DEPTH OF 170mm
- EXCAVATE BITUMINOUS MATERIAL FOR YORKSTONE PAVING CONSTRUCTION TO A DEPTH OF 225mm
- EXCAVATE BITUMINOUS MATERIAL TO A DEPTH OF 230mm
- EXCAVATE YORK STONE PAVING TO A DEPTH OF 230mm
- COLD MILLING OF EXISTING SURFACE TO A DEPTH OF 40mm
- PLANE OFF/ REMOVE MATERIAL TO TOP OF SETTS AND LANCE CLEAN SETTS

REV	DRN	CHK	APP	DATE	DESCRIPTION
Wilde Consulting Civil & Structural Engineers ISO 9001 REGISTERED Brindley Lodge, Adcroft Street, Stockport, Cheshire. SK1 9HS www.wildecivil.co.uk Tel : 0161-474-7479 Fax : 0161-474-7492					
Client PROPERTY ALLIANCE GROUP LTD					
Project 3 ST PETER'S SQUARE MANCHESTER					
Title SITE CLEARANCE & EARTHWORKS					
Scale 1:200	Drawn JW	Date 13.05.20	Chkd ML	Approved TF	Revision -
Drawing No. 766-016-0200-001				Revision -	
Status FOR CONSTRUCTION				Sheet Size A1	