




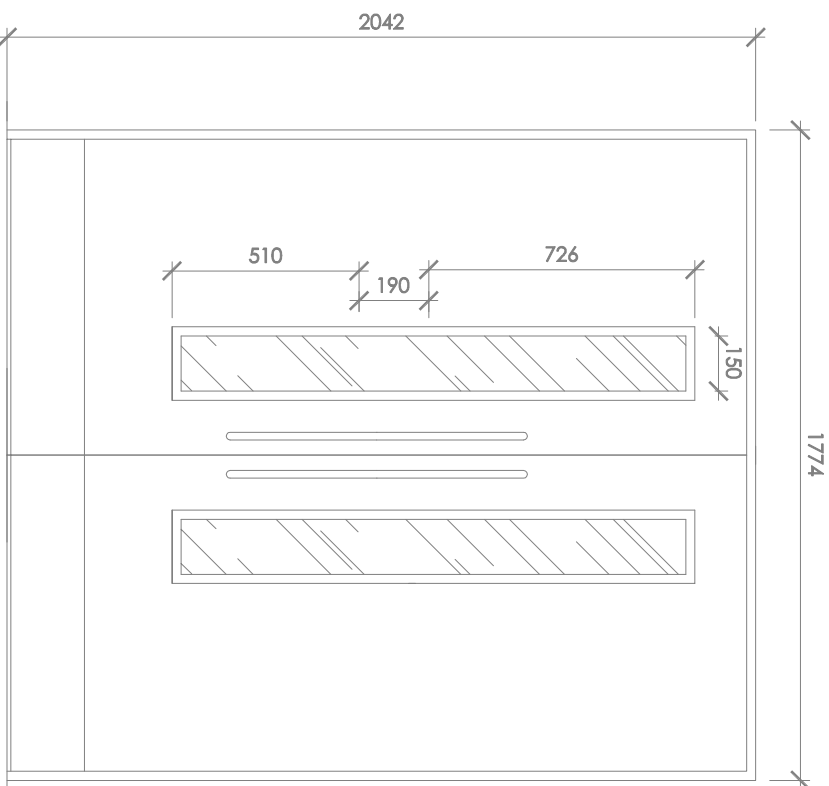

- | Qty | Description |
|-----|---|
| 3 | 100x75mm Brass butt hinges with square corners CE Marked for fire escape to BS EN 1935 4-7-61*1-4-0-13 subject to regular lubrication to manufacturers instructions |
| 2 | Slide arm suitcase mounted Fig1 overhead door closer. Controlled closing adjustable size 2-5 Universal fittings for timber doors Certified listed to BS EN 1154 |
| 2 | Brass 700x100mm push plate to conceal fittings to push side of the leaf |
| 2 | Floor mounted door stop, Brass with integral rubber bump stop |
| 2 | 150 high kick plate, stainless steel 1.2mm drilled and countersunk, sized to suit leaf with minus 5mm either side |
| 2 | 22mm Ø 800mm long T-bar pull handles to the pulling side of the leaf |
| 2 | Toughened fire rated glass clear insulated to retain the doors integrity |
| 1 | Intumescent brush and smoke seals |

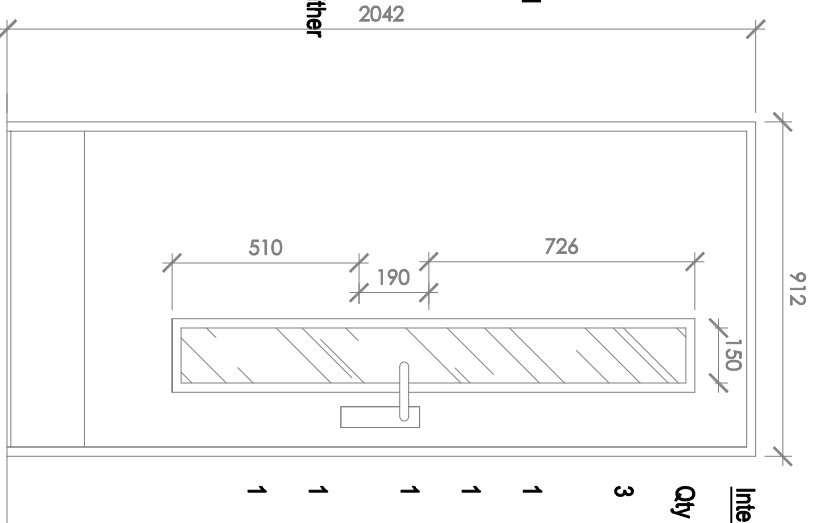


- | Qty | Description |
|-----|---|
| | <u>Internal door type B (FD30S): Single door Cate (G03 & Kitchens F04, F09, F010)</u> |
| 3 | 100x75mm brass butt hinges with square corners CE marked for fire escape doors to BS EN 1835 4-7-6-1-4-0-13 subject regular lubrication to manufacturers instructions |
| 1 | Assa Abloy Hospitality Security System incorporating VingCard Classic RFID Milane lockset to match existing |
| 1 | 76mm diameter fire door keep shut symbol, satin stainless steel |
| 1 | Slide arm surface mounted overhead door closer. Controlled closing adjustable size 2-5 universal fixings for timber doors certified listed to BS EN 1154 |
| 1 | Toughened fire rated glass clear insulated to retain the doors integrity. |
| 1 | Intumescent brush and smoke seals. |

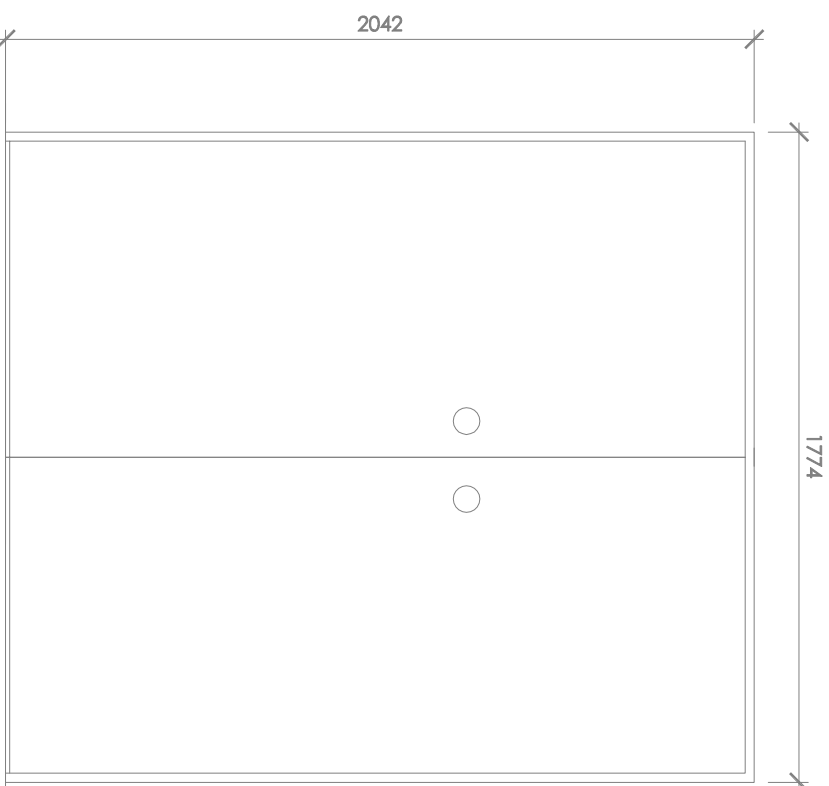

- | Qty | Description |
|-----|--|
| 3 | 100x75mm Satin Stainless steel butt hinges with square corners CE Marked for fire escape to BS EN 13835 +7-61-1-4-0-13 subject to regular lubrication to manufacturers instructions. |
| 1 | 76mm diameter fire door keep shut symbol, countersunk fixed, satin stainless steel. |
| 1 | Euro profile dead lock ref: 12.861 |
| 2 | Flush bolts top and bottom ref: 34.007, non active leaf |
| 1 | intumescent brush and smoke seals |



- | Qty | Description |
|-----|---|
| | <u>Internal door type D (Pain Grade) : Bedroom bathrooms (F07 & F08)</u> |
| 3 | 100x75mm satin stainless steel butt hinges with square corners CE marked for fire escape doors to BS EN 1835 4-7-6-1-1-4-0-3 subject to regular lubrication to manufacturers instructions |
| 1 | Lever handle furniture with thumb turn emergency release to match existing installation |

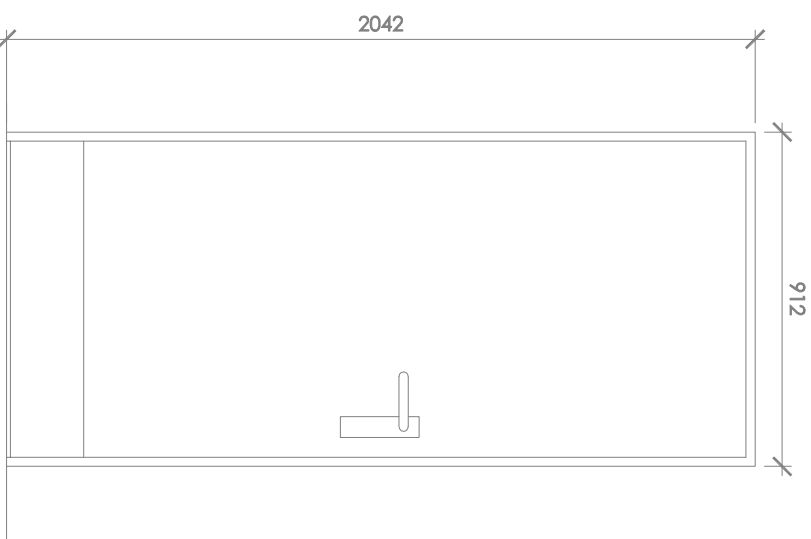

- | Qty | Description |
|-----|--|
| 3 | 100x75mm satin stainless steel butt hinges with square corners CE marked for fire escape doors to BS EN 1936 4-7-6-1-1-4-0-13 subject to regular lubrication to manufacturers instructions |
| 1 | Assa Abloy Hospitality Security System incorporating VingCard Classic RFID Mifare lockset to match existing |
| 1 | 76mm diameter fire door keep shut symbol, satin stainless steel |
| 1 | Slide arm surface mounted overhead door closer, Controlled closing adjustable size 2.5 universal fittings for timber doors certified listed to BS EN 1154 |
| 1 | Intumescent brush and smoke seals. |
| 1 | Brass half moor door stop |

Internal door type E (Paint Grade) : Bedroom Doors (F05 & F06)

Qty	Description
-----	-------------

- 3 100x75mm satin stainless steel butt hinges with square corners CE marked for fire escape doors to BS EN 1835:4.7-6.1-1.4-6.13 subject to regular lubrication manufacturers instructions
- 1 Asa Abloy Hospitality Security System incorporating VingCard Classic RFID Mifare lockset to match existing
- 1 76mm diameter fire door keep shut symbol, satin stainless steel
- 1 Slide arm surface mounted overhead door closer. Controlled closing adjustable size 2.5 universal fittings for timber doors certified listed to BS EN 1154
- 1 Intumescent brush and smoke seals.
- 1 Brass half moor door stop

Internal door type B (FD30S): Single door Cafe (GO3 & Kitchens F04, F09, F010)

Qty	Description
-----	-------------

- 3 100x5mm brass pull hinges with square corners CE marked for fire escape doors to BS EN 1838 4-7-6-1*-4-0-13 subject regular lubrication to manufacturers instructions
- 1 Asa Abloy Hospitality Security System incorporating VingCard Classic RFID Milane lockset to match existing
- 1 76mm diameter fire door keep shut symbol, satin stainless steel
- 1 Slide arm surface mounted overhead door closer. Controlled closing adjustable size 2-5 universal fittings for timber doors certified listed to BS EN 1154
- 1 Toughened fire rated glass clear insulated to retain the doors integrity.
- 1 Intumescent brush and smoke seals.

NOTES

1. DO NOT SCALE FROM THIS DRAWING.
2. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
3. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE SPECIFICATION AND ALL RELEVANT ARCHITECTURAL, ELECTRICAL, MECHANICAL, AND STRUCTURAL DRAWINGS.

IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING SIGNIFICANT RESIDUAL RISKS:-

Item	Hazard	Risk

[illegible]

PLANNING

Project
CHANCELLORS HOTEL ALTERATIONS TO FORM STUDENT RESIDENCE
Building Name
CHANCELLORS HOTEL S & CONFERENCE SUITE
Sub Site Name
CHANCELLORS WAY
Site Name
MOSELEY ROAD, MANCHESTER

PM	Drawn	Checked	Authorised
RECOM	PB	--	--
Scale	Date	Date	Date
1:20 @A2	03/03/20	--/--/--	--/--/--