




Document Title:	Standard Operating Procedure for Herras Type Fencing Erection		
Document Reference No:	BDL SOP – 003		
Issue Date:	01/07/2019		
Revision Number:	1		
Approved by:	Name	M. Degnan	Signature

Herras type fencing will be delivered to site at date previously agreed with the Site Supervisor and the supplier of the Herras type fencing.

Appropriate person will be the designated operated task with unloading the panels. These will be done with the mechanical aid of a forklift of which the designated person will be competent in using. No manual handling is expected at this stage, nor is any working at height expected.

The disconnection of any security straps etc are the responsibility of the delivery driver of whom is expected to adhere to his own company's delivery procedures. Under no circumstances anyone person is expected or permitted to climb onto the bed of the wagon.

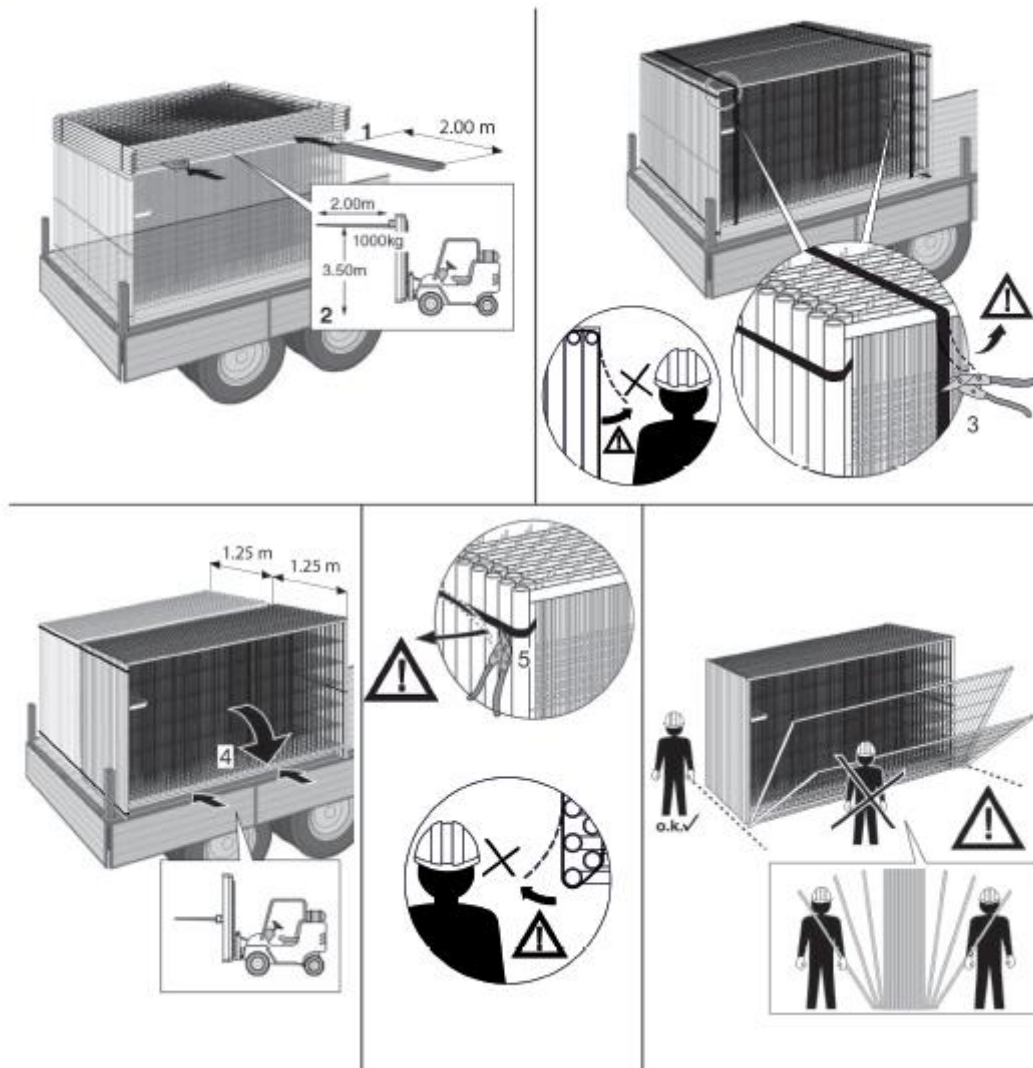



Once all panels have been unloaded, a team of operatives will then be tasked with their erection. Heras fencing panels will be erected in the areas identified on site as per the site plan, for the purposes of site security and the demarcation of demolition exclusion zones and will be done so following manufacture requirements, frequently consisting of the following practices:

Note that all panels must be DOUBLE clipped.

