

TRENCHARD DRIVE

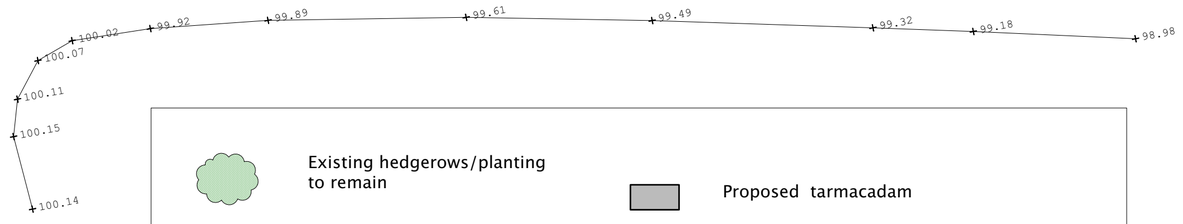

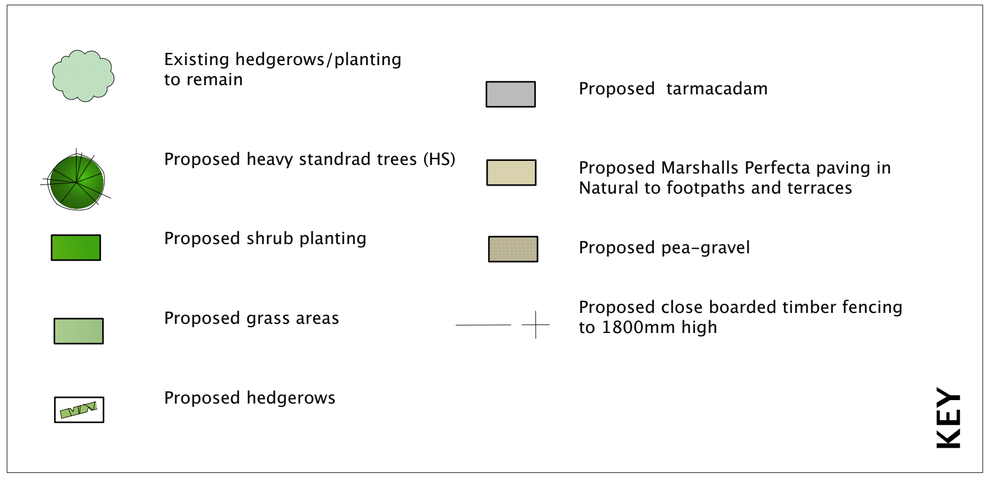

PREPARATION

1. Soil to be graded to smooth, flowing contours to tie into existing levels.

2. Areas within the canopy of existing trees to be re-graded to original levels. These should be worked by hand.

3. Soils shall only be worked when the ground conditions are reasonably dry.

4. Immediately before spreading and regrading topsoil, all stones larger than 75mm in anyone direction shall be removed off site. Likewise, all arisings, contaminants and debris to be removed off site.

TOPSOILING

5. Any imported topsoil shall be free if fragments of roots, aggressive weeds, sticks, straw, subsoil, pieces of bark, concrete, glass, wire, lumps of clay or vegetation, and the like.

6. Topsoil (imported or existing) shall be to a depth of 350mm for all areas to be planted, and 150mm for grassed areas.

7. Once spread, topsoil to be gently firmed but not compacted.

8. Finished levels shall marry into adjoining areas.

PIT PREPARATION TREES, HEDGEROWS & SHRUBS

9. Tree pits to be 600x600x500mm
Shrubs 300x300x300mm
Hedgerows 400mm wide x 300mm deep

TREE PLANTING

10. All tree planting, necessary amelioration for stock and maintenance to be in general compliance with BS8545:2014 'Trees: from nursery to independence in the landscape'.

11. All trees are to be staked and secured as followed: -

i) Standard trees are to be double staked to 750mm above ground and secured using a single rubber tie and spacer.

PLANTING - ORNAMENTAL SHRUBS & HEDGEROW PLANTING AREAS

12. Plant handling at the nursery, and during transit up to delivery , shall be in accordance with 'Plant Handling' the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association) which refers to the receipt, unloading and temporary storage of plants.

13. Plants shall be first class examples of their species or variety, free from all pests and diseases with good fibrous root systems and materially undamaged. (Refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock')

14. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.

15. The contractor must ascertain for themself the exact location of any under-ground services and maintenance points.

16. Water as necessary to ensure the establishment and continued thriving of planted and grassed matter.

17. Carry out all work when soil and weather conditions are suitable:
i) Do not plant during periods of frost or strong winds.
Plant only during the following periods: -

- Bare root deciduous trees and shrubs: Late October to late March
- Container grown plants: At any time if ground water and weather conditions are favourable.

18. Ensure that adequate weed control is available following planting.

PLANTING NOTES

ORNAMENTAL SHRUB MIX A		Bed No.	C	D
0.7m centres		Bed Area (m2)	15	
Species	**Size**	**Type**	**No.**	**No.**
Berberis darwinii 'Nana'	30-40cm	2L	6	6
Cornus canadensis	30-40cm	bare root	7	7
Cotoneaster 'Coral Beauty'	30-40cm	2L	6	6
Hypericum 'Hidcote'	30-40 cm	1L	7	7
Lonicera 'Maygreen'	40-60cm	3L	6	6
Prunus 'Zabeliana'	40-60cm	3L	6	6
		Total	**38**	**38**

ORNAMENTAL SHRUB MIX B		Bed	A	B
0.7m centres		Bed Area (m2)	5	3
Species	**Size**	**Type**	**No.**	**No.**
Cotoneaster 'Skogholm Coral Beauty'	30-40 cm	2L	5	3
Rosa pimpinellifolia 'Dunwich Rose'	30-40 cm	bare root	5	3
Prunus 'Zabeliana'	45-60 cm	3L	5	3
		Total	**15**	**9**

TREE PLANTING			
Species	**Size**	**Type**	**No.**
Malus tschonoskii (Mt)	10-12cm girth	Rootballed	2
Prunus X Sargentii (Ps)	10-12cm girth	Rootballed	3
Sorbus aucuparia 'Lutescens' (Sa)	10-12cm girth	Rootballed	2
		Total	**7**
HEDGEROW PLANTING			
H1			
5 per lin m - double staggered row			
Species	**Size**	**Type**	**No.**
Corylus avellana	45-60cm	bare root	18
Crataegus monogyna	45-60cm	bare root	45
Ilex aquifolium	30-40cm	1L	9
Prunus spinosa	45-60cm	bare root	18
		Total	90
H2			
5 per lin m - double staggered row			
Species	**Size**	**Type**	**No.**
Fagus sylvatica	45-60cm	bare root	210
		Total	**210**

PLANTING SCHEDULES

0 10m 20m 30m

27-29 TRENCHARD DRIVE, WYTHERNSHAW

MR K SINGH

Proposed Landscape Works

General Arrangement Plan

PR/210209/GA/01

Contractors are advised to check dimensions with the architect before setting out on site

The plant room

Vanessa Swift Bsc Dip LA CMLI
Landscape Architect
M: 07918 081407
F: 08717 145212
E:vanessa@theplantroom.co.uk
www.theplantroom.co.uk

Chartered Member of the Landscape Institute

March 2021

1:200 @ A2
1:400 @ A4