

- GENERAL NOTES:
- 1. ALL DIMENSIONS ARE IN MM AND ALL LEVELS ARE IN M UNITS.
 - 2. THE CONTRACTOR IS RESPONSIBLE FOR THE ACCURACY OF ALL SITE DIMENSIONS AND THE CORRECT SETTING OUT OF WORK ON SITE.
 - 3. EXISTING STRUCTURE TO BE EXPOSED BY THE GENERAL CONTRACTOR AS REQUIRED BY THE ENGINEER FOR CHECKING PRIOR TO COMMENCING ANY STRUCTURAL WORK
 - 4. FINAL STRUCTURAL DETAILS TO BE DETERMINED BY THE ENGINEER AFTER THE EXISTING STRUCTURE HAS BEEN EXPOSED AND INSPECTED.
 - 5. NO VARIATION TO THE STRUCTURAL DETAILS SHOWN ON THE DRAWINGS IS ALLOWED WITHOUT PRIOR APPROVAL BY THE ENGINEER.
 - 6. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR THE TEMPORARY WORKS DESIGN INCLUDING THE STRUCTURAL STABILITY AND INTEGRITY OF THE EXISTING WALL THROUGHOUT THE DURATION OF THE WORKS.



Capital Programmes Division

Manchester City Council
PO Box 532, Town Hall
Manchester
M60 2LA

DRAWING STATUS: Information

PROPERTY TITLE
HEATON PARK GARDEN CENTRE
HEATON PARK, PRESTWICH
M25 2GT

UPRN: 010090241973
DfE NO.: -

PROJECT TITLE
HEATON PARK - GARDEN CENTRE WALL
NEW WALL & FOUNDATION

DRAWING TITLE
Ancon Wall Tie


JOB NO.: AMP/44733/1
DATE: 22/11/2021
REV: 1

SCALE: 1: 2 @ A3
AUTHOR: RH
CHECKED BY: OJ
APPROVED BY:

DRAWING NO.: 002

DEBONDED TIES SHOULD BE INSTALLED WITH A 10MM GAP AT THE END OF THE SLEEVE TO ALLOW FOR EXPANSION OF THE MASONRY

ANCON PPS WALL TIE - 225MM
SHOWN WITH A 120MM DEBONDING SLEEVE
STANDARD TIE LENGTHS = 200, 225MM

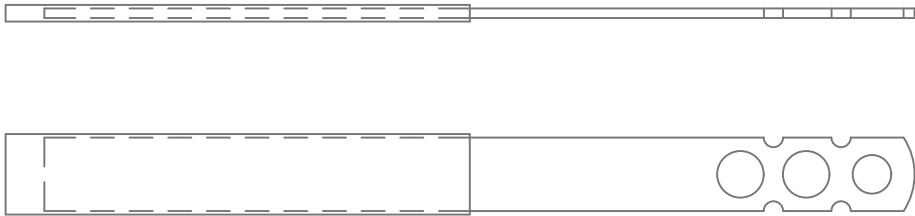


POLYSULPHIDE EXPANSION JOINT SEALANT IS REQUIRED FOR SEALING ALL MOVEMENT JOINTS.

10MM AEROFILL IN EXPANSION / CONTRACTION JOINT

(1:2)

16MM COMPRESSIBLE FILL AND MASTIC

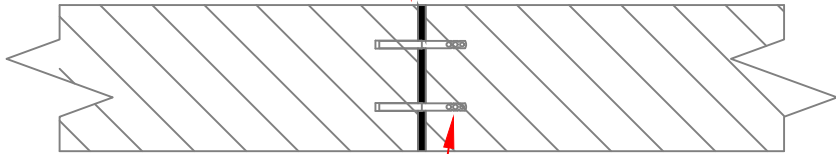

ANCON PPS (225) HALF DEBONDED WITH SLEEVE AT 450MM VERTICAL CENTRES

PLAN (1:20)