


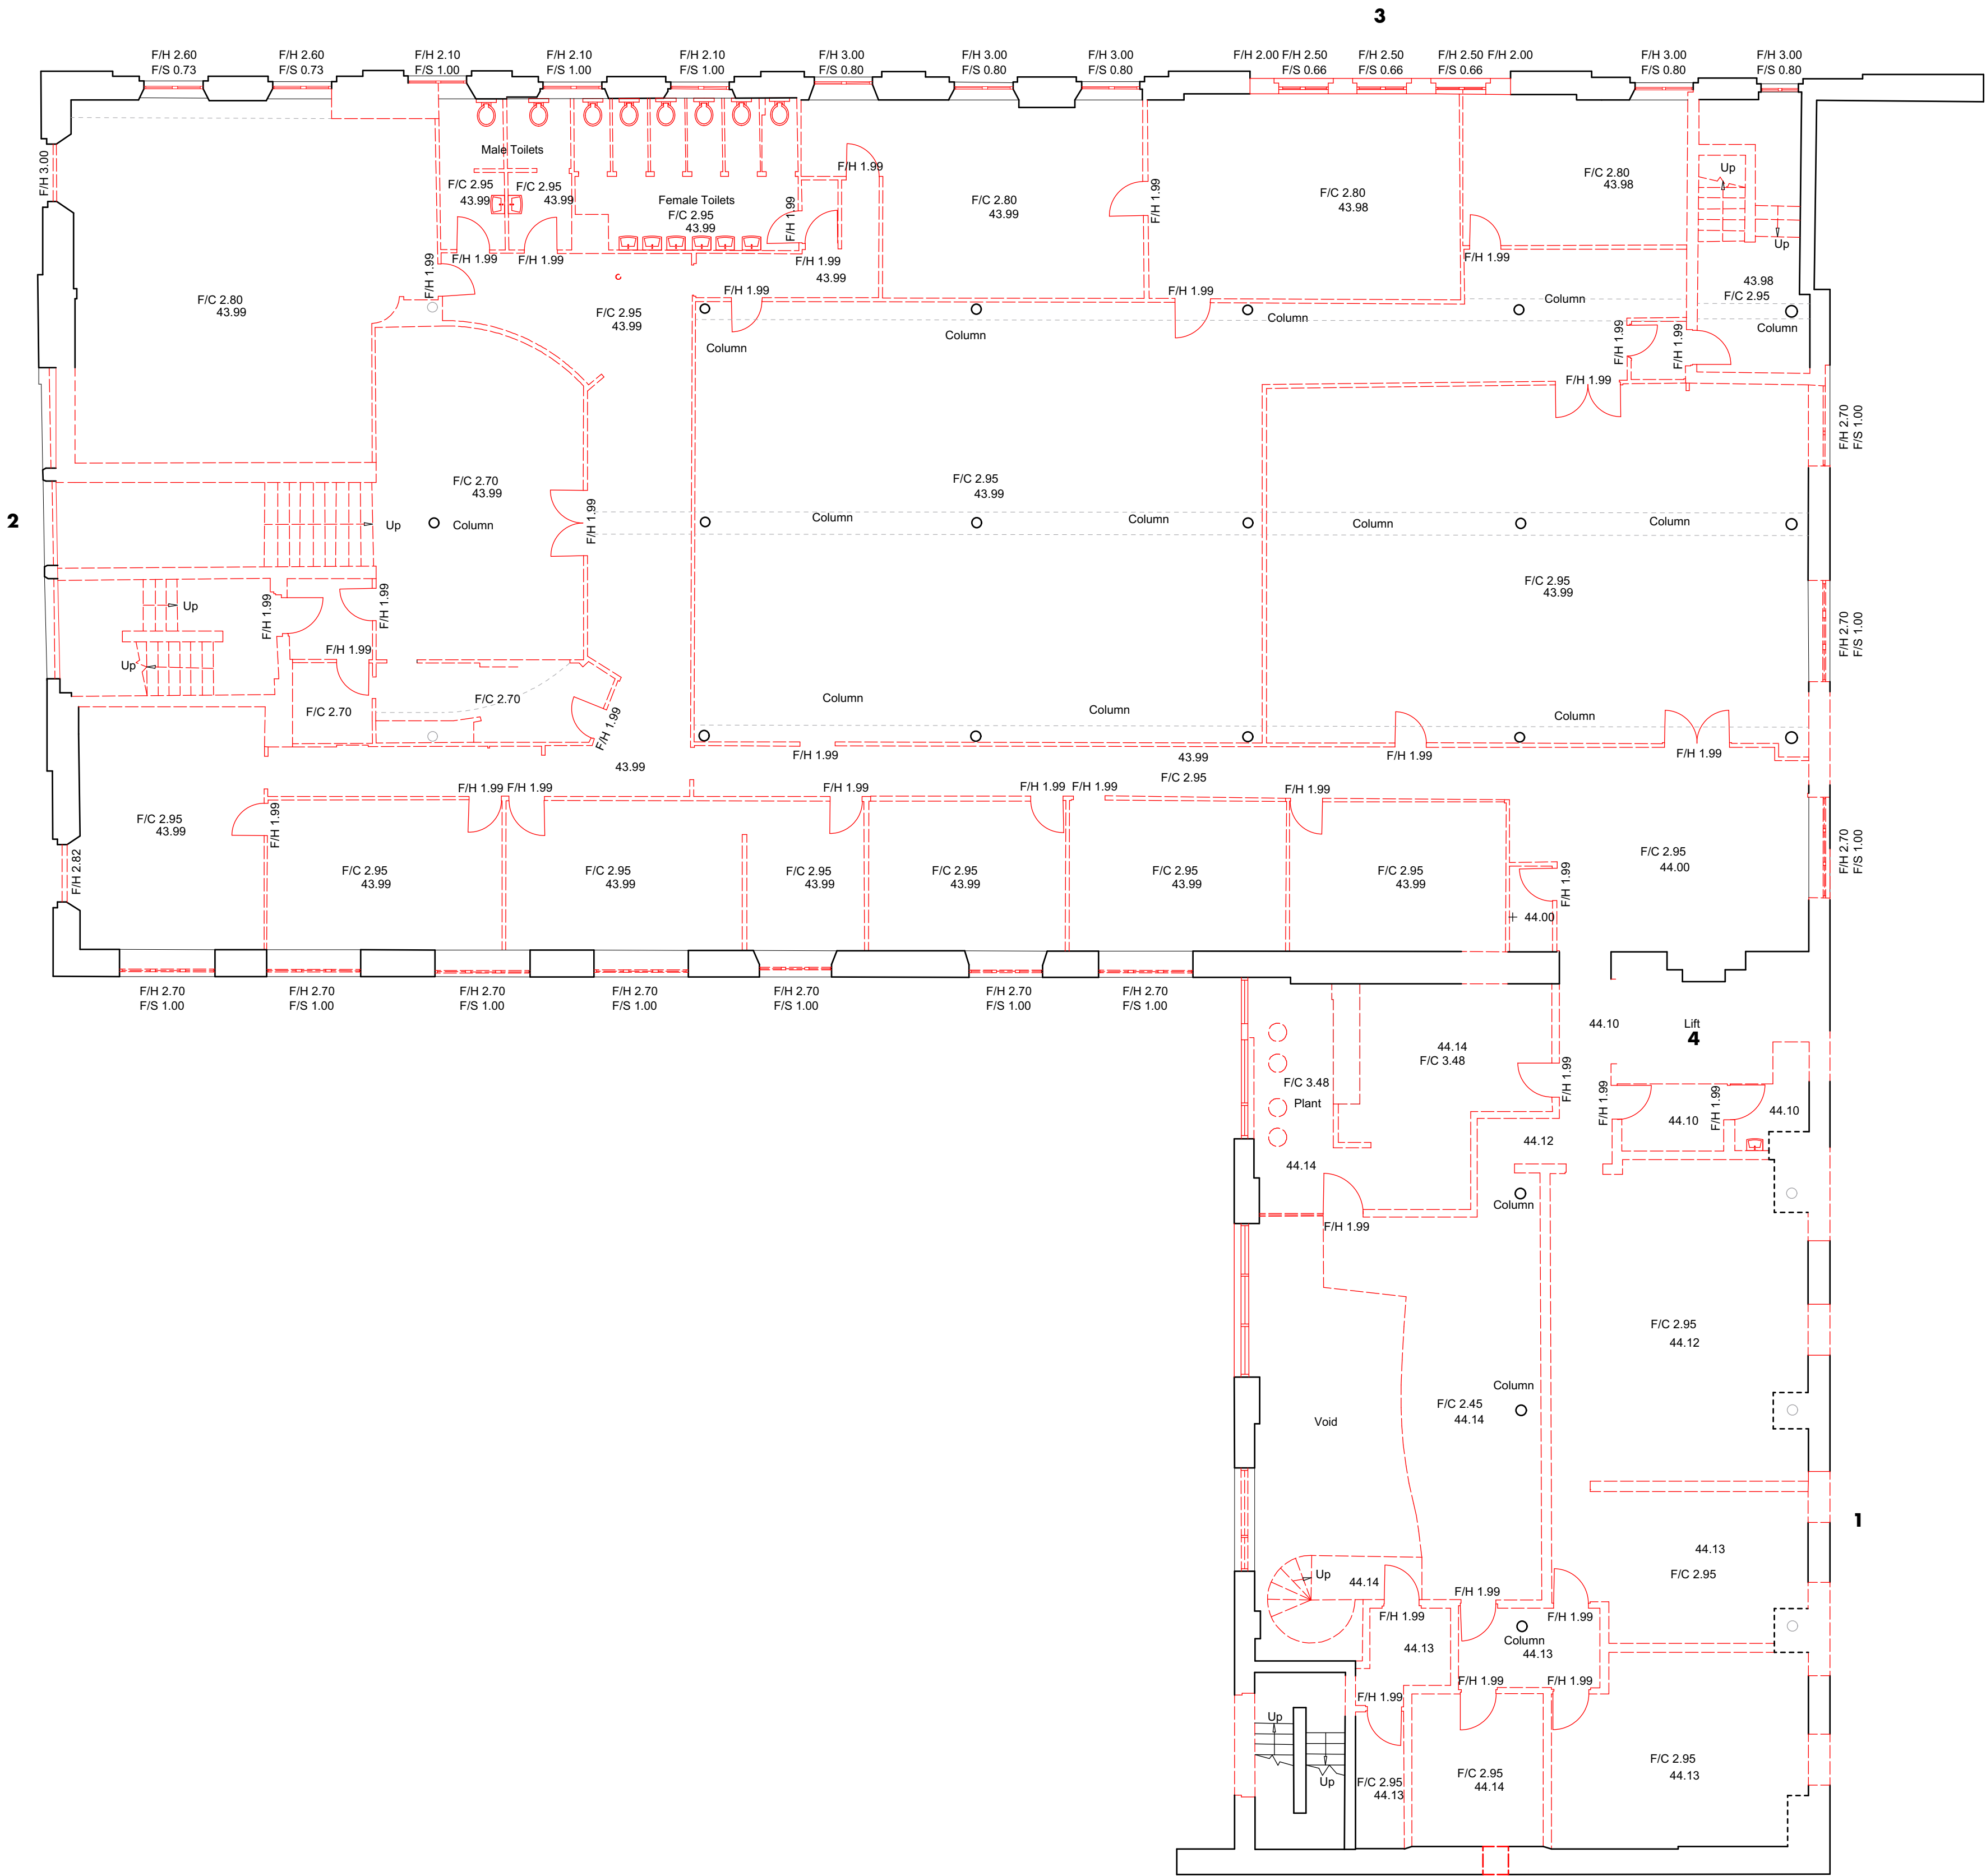

notes typically:

all existing windows to be carefully removed

all existing lightweight internal partitions / doors and suspended ceilings to be removed

all existing loose fittings and fixtures, sanitaryware etc to be removed from internal spaces

all existing pipework / services internally to be removed, all connecting services to be safely terminated in advance

all existing lightweight staircases to be removed.

all walls to lift/hoist shafts interfering with proposed accommodation arrangement to be demolished

carry out brickwork repairs locally where necessary, areas of repointing not deemed to be lime mortar type to be raked and reinstated as such

cleaning method to existing brickwork / masonry (cills / lintels etc internally to be agreed with LA

- key:**
- to be removed/demolished
 - assumed boxing in / concealed column position
- 1** existing brickwork to be removed to create new apertures
- 2** glass block and door to archway to be removed
- 3** brick infill / smaller apertures to archway to be removed and rationalised
- 4** lift shaft to be removed

d • planning issue	20.01.17 • ch • hlm
c • status/notes updated + draft planning issue	10.11.16 • hlm • ms
b • work stage 2	28.07.16 • hlm • ms
a • draft work stage 2	14.07.16 • ajd • hlm
- • first issue	27.05.16 • hlm • ms
rev • description	issued • drawn • checked

shedkm	+44 (0)151 709 8211 +44 (0)207 253 8881
project	kampus • listed buildings
client	ASDL
drawing number	AW(00)126d
scale	100 @ a1
status	work stage 3

minshull • first floor demolitions

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately