


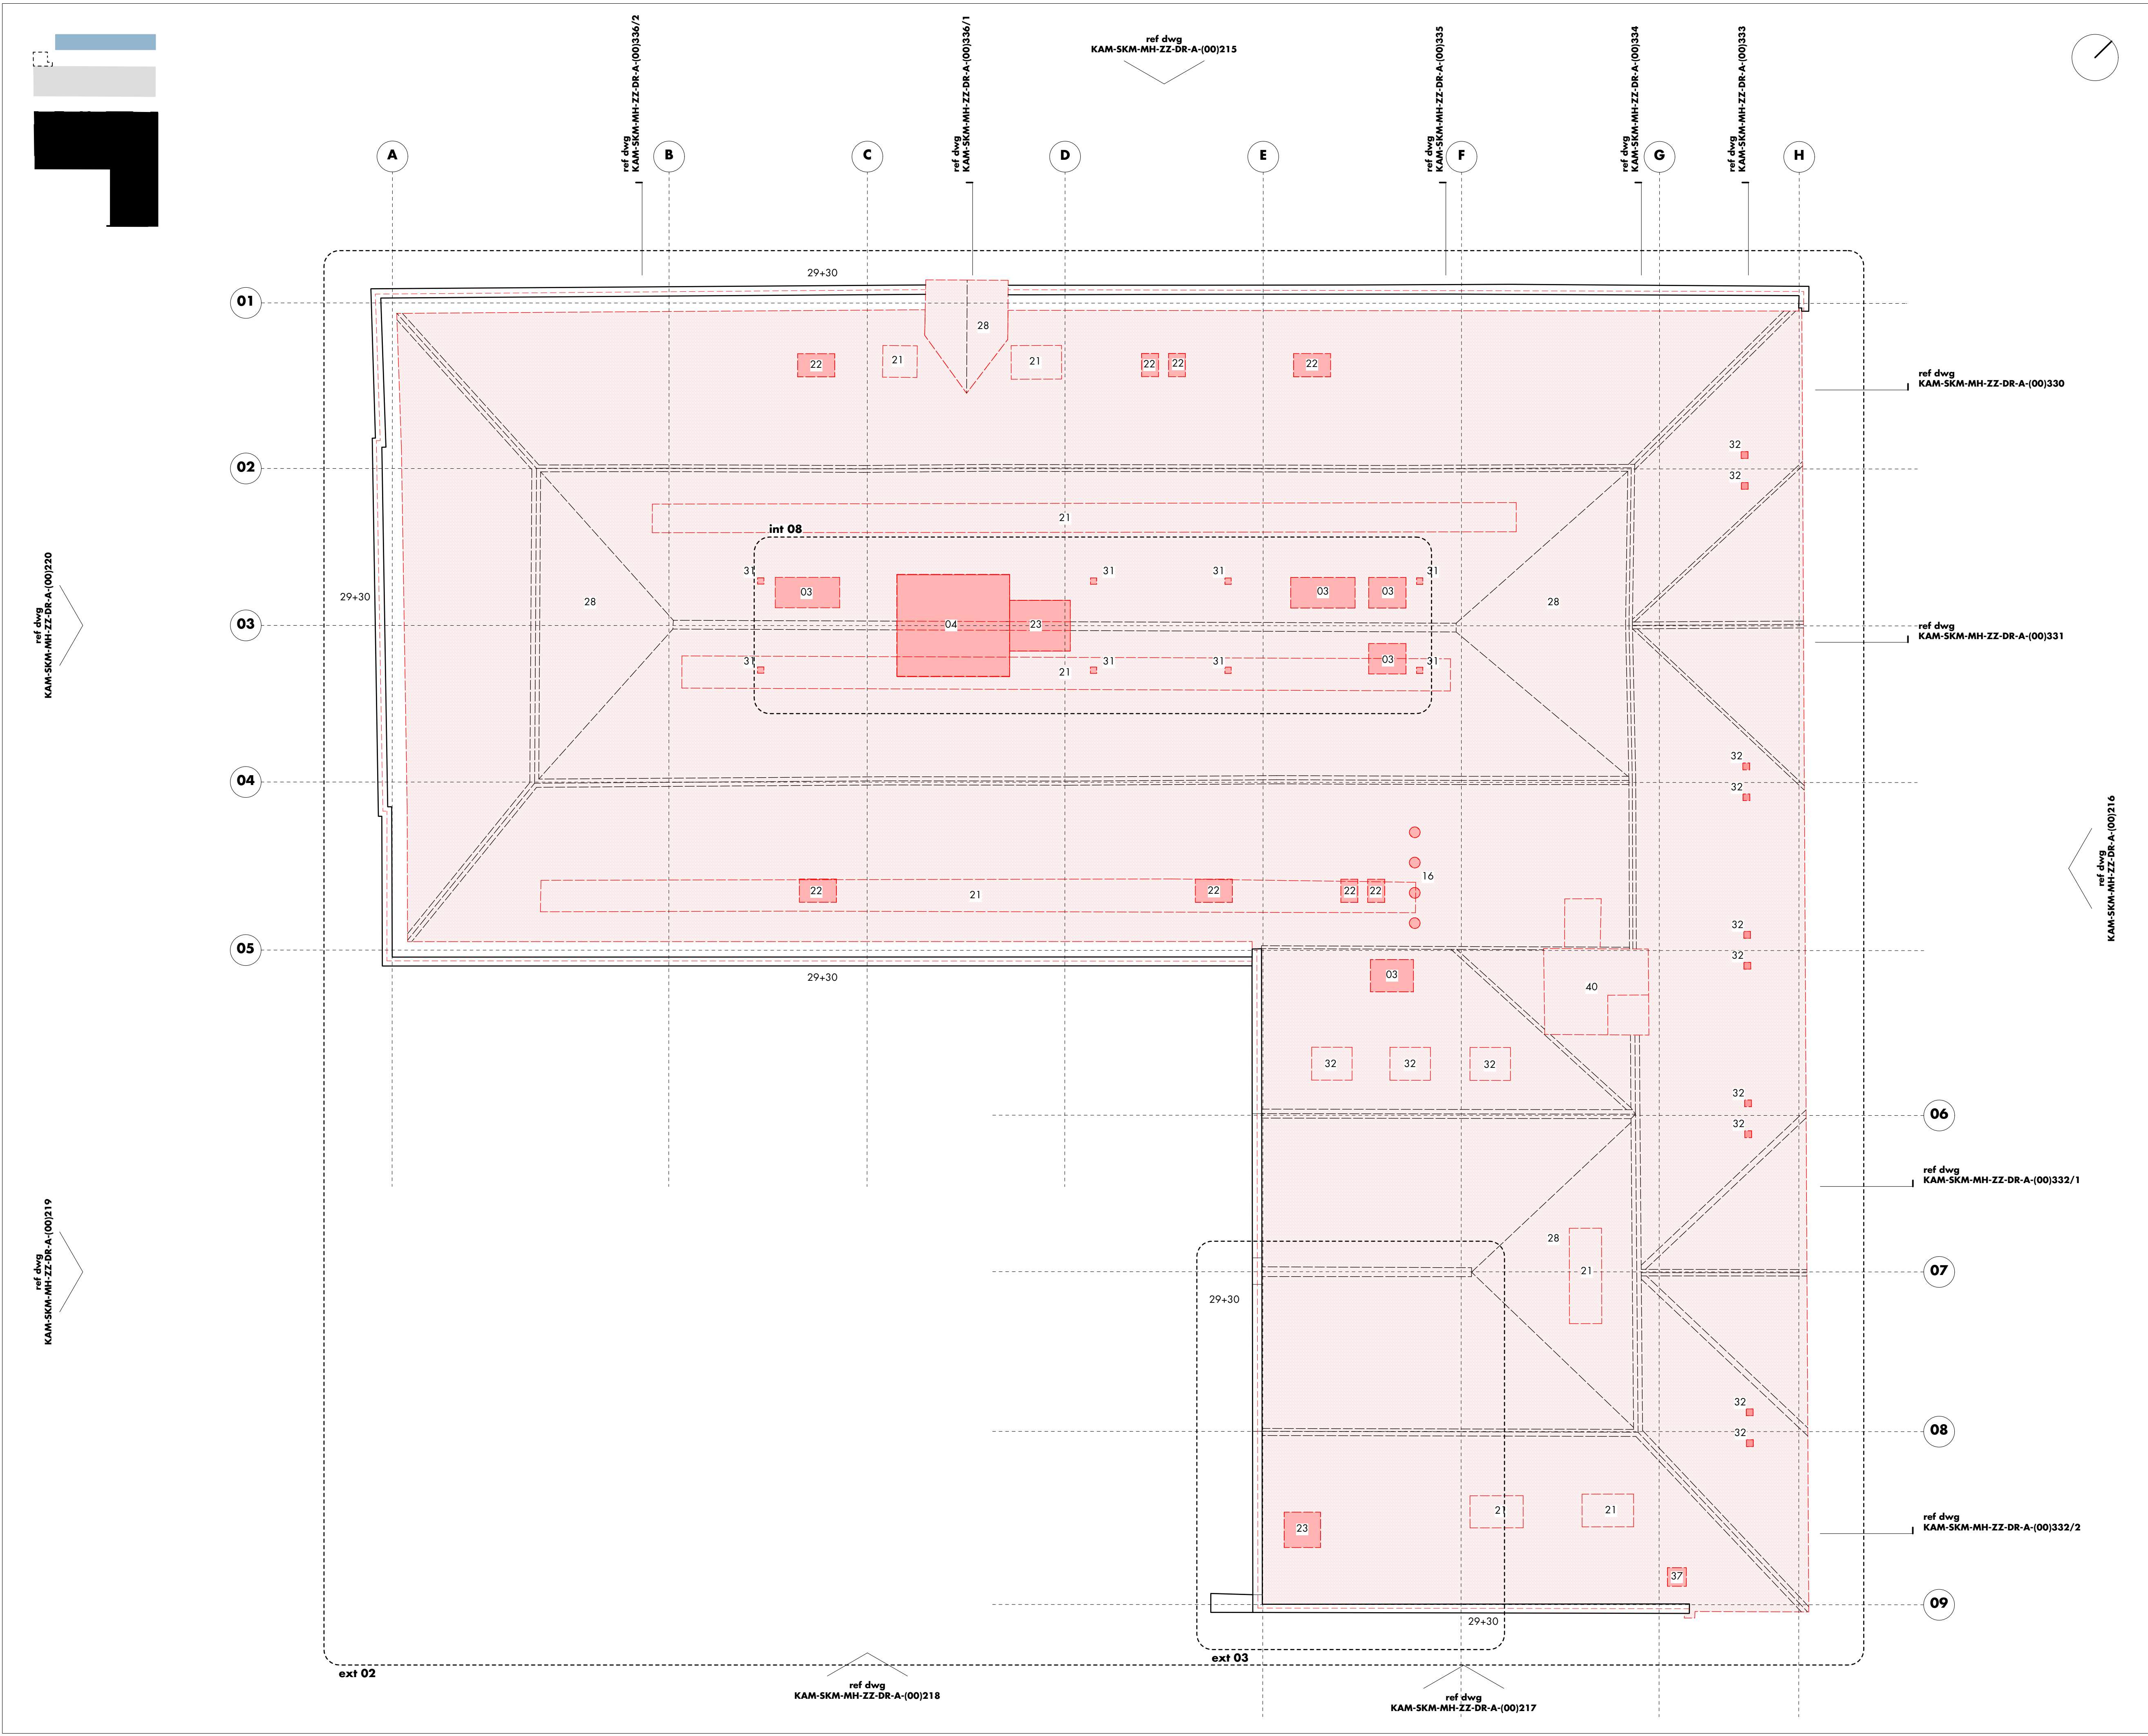

01 existing lift shaft removed

02 stair + half landings removed - brick enclosure retained

03 new void for service riser

04 new void for lift shaft + service riser, iron beam removed.

05 lift pit excavated to manufacturers guidelines

06 new void for stair core, iron beam + joists removed

07 existing openings taken to ground to create new entrances and infill to match surrounding - G4 commercial entrance

08 new opening for corridor

09 composite concrete slab removed to ground floor wall line.

10 existing brickwork removed to create new window opening

11 new window opening with stone plinth cut locally.

12 glass block wall removed, concrete frame retained

13 existing door to be carefully removed, restored and reinstated, ref heritage report

14 existing window removed and cills to be lowered

15 existing corrugated metal deck floor build up and foam insulation to be removed

16 opening to accommodate light well

17 new opening for door/window, existing brickwork removed

18 existing door opening widened

19 corrugated facade cladding removed

20 floor boards removed back to ground floor brick piers

21 existing roof lights and supporting timbers removed

22 new rooflight opening

23 new opening for aov

24 joist to be removed

25 roof purlin to be removed

26 stair + half landings and brick enclosure removed

27 pipes/services to be removed

28 roof tiles to be carefully removed

29 existing gutters, flashing and waterproofing to be removed

30 parapet stone coping to be removed, refurbished and reinstated where possible

31 opening to allow plant deck support steel

32 ventilation tile for mvr outlet

33 wall/partition/door/fixture to be removed

34 steel staircase to be removed

35 existing entrance porch to be removed

36 concrete plinth/steps to be removed

37 chimney to be removed

38 window to be removed

39 electric cupboard to be removed

40 existing lift overrun to be removed

41 rainwater goods to be removed, original items to be assessed for potential reuse

42 partial removal of existing purlin to provide zone for column penetration

43 new opening for service duct

44 new opening for escape stair

45 - localised removal of 2no joists

- existing opening adopted

- lintel to be lifted to suit addition of raised floor

notes

all existing windows to be carefully removed, subject to MCC approval

any remaining lightweight internal partitions / doors and suspended ceilings to be removed

all existing pipework / services internally to be removed. all connecting services to be safely terminated in advance

all areas of vegetation to be removed and treated to eradicate

areas of failed mortar/repainting to be raked out, repointed with mortar mix to align with WML specification and LA agreement

cleaning method to existing brickwork / masonry (cills / lintels etc internally to be agreed with LA

all roof slates to be removed, replacement strategy proposed subject to agreement with MCC.

notes

- survey based on murphy surveys - global consulting engineers

- survey info issued on 21.06.18

grid set as follows ...

- horizontal grid along gridline 03 established at third floor between centres of columns at gridline junction 03/B and 03/G

- horizontal grid along gridlines 02, 04, 06, 07 + 08 established at third floor parallel to gridline 03 at centre of column on gridline G

- vertical grid established at third floor at centres of columns along gridline 03

for plan drawings ref:

KAM-SKM-MH-ZZ-DR-A-(00)121-125

for elevation drawings ref:

KAM-SKM-MH-ZZ-DR-A-(00)215-217

for section drawings ref:

KAM-SKM-MH-ZZ-DR-A-(00)330-336

for core GA detailed demolition ref:

KAM-SKM-MH-ZZ-DR-A-(00)172-174

for elevation demolition ref:

KAM-SKM-MH-ZZ-DR-A-(00)215-220

for section demolition ref:

KAM-SKM-MH-ZZ-DR-A-(00)330-336

for external remedial schedule ref:

KAM-SKM-MH-ZZ-SC-A-150

key:

to be removed/demolished

floor to be removed/demolished

joist removal refers to floor above associated plan

floor removal refers to floor of associated plan

s/o setting out subject to alignment with existing brick coursing.

change from original application, refer to changes schedule for further details

• section 19/73 application issue

23.04.21 • hlm • jr

rev • description

issued • drawn • checked

shedkm

+44 (0)151 709 8211

+44 (0)207 253 8881

project

kampus • listed buildings

client

mount anvil

drawing number

KAM-SKM-MH-RF-DR-A-(00)125

• a

scale

1:100 @ a1

status

planning

minshull house • roof demolition plan

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately