

© COPYRIGHT

The copyright in this drawing is vested in Sheppard Robson and no license or assignment of any kind has been, or is, granted to any third party whether by provision of copies or originals or otherwise unless agreed in writing.

DO NOT SCALE FROM THIS DRAWING

The contractor shall check and verify all dimensions on site and report any discrepancies in writing to Sheppard Robson before proceeding work.

FOR ELECTRONIC DATA ISSUE

Electronic Data drawings are issued as "read only" and should not be interrogated for measurement. All dimensions and levels should read, only from those values stated in text on the drawing.

KEY:

Pall Mall Medical Centre
Future FAB

AREAS NOT IN SCOPE

Type

CLXXA

Package Identifier
Ceiling

Secondary Letter
Variations in colour/finish

NOTES:

- Refer to 220XX series for Internal Wall Cladding
- Ceiling heights subject to further co-ordination with services engineer.
- Refer for plastering above unless a finish when required.
- All dimensions to be checked on site and any discrepancies to be highlighted prior to construction.
- Acoustic requirements subject to further co-ordination with acoustic consultant.

CEILING CODES:

- CL01-20 Plasterboard
- CL21-20 Suspended Tile
- CL41-50 Acoustic
- CL51-60 Joist/Specialist
- CL61-70 Other
- CL71-80 Not Ceiling
- CL81-90 Boardwalk Ceiling

REV. DATE AMENDMENT

P01	18.02.2022	Stage 2 - First issue for stage approval
P02	05.04.2022	Draft issue for planning and listed building consent
P03	12.04.2022	Draft issue for planning and listed building consent
P04	25.04.2022	Stage 3 issue
P05	29.04.2022	Issue for Planning and Listed Building Consent

NOTES


- Please note that there are areas with limited access. Some areas may differ from the survey information.

- All dimensions to be checked on site and any discrepancies to be highlighted prior to construction.

- If in doubt about any element of the works, please consult the Architect before proceeding. Any proposed works that deviate from this drawing are to be reviewed by the Architect prior to carrying out these works.

- Special care to be taken when working adjacent to heritage features such as mosaic tiles or brick floors to stair cores, so as not to disturb or damage these features. Ensure adjacent elements are not damaged.

KEYPLAN

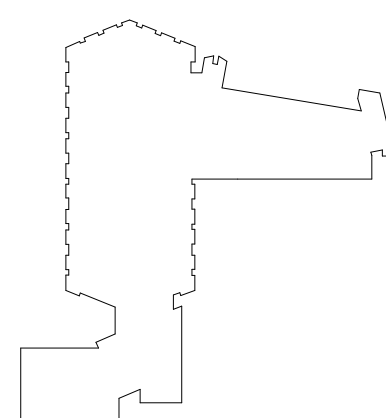

CLIENT

Bruntwood Works

bruntwood
Works

ID:SR

SHEPPARD ROBSON

27th Floor City Tower Piccadilly Plaza Manchester M1 4BT
T: +44 (0)161 233 8900 E: enquiries@sheppardrobson.com

PROJECT
Pall Mall Court

SCALE@A0 DATE 29.04.2022 ORIGINATOR JZW CHECKED EG AUTHORISED ML

Ceilings

- Level 05 Plan
- Scoping

RIBA Stage 3

STATUS PURPOSE FOR ISSUE SR NO.

S2 Planning 6911

DRAWING NO. REV.

6911 - IDSR-XX-05-DR-I-35205 P05

35 Series
Ceilings

Plasterboard system(s)	Acoustic system(s)	Specialist system(s)	Bespoke system(s)	Other	Basebuild/Existing
CL01 [K40/XXX] Plasterboard CL02 [K40/XXX] Moisture Resistant Plasterboard	CL42A [K40/XXX] Acoustic System Panel Colour 1 CL42B [K40/XXX] Acoustic System Panel Colour 2 CL42C [K40/XXX] Acoustic System Panel Colour 3 Acoustic requirements tbc subject to further coordination with acoustic consultant	CL51A [K40/XXX] Linear Slats CL52A [K40/XXX] Raft System CL54A [N10/XXX] Timber Panel System	CL61A [K40/XXX] Timber framed Coffered Ceiling	CTXX Curtain Tracks Bulkhead (High Level) Denotes extent of high level bulkheads (Refer to 220XX series for details) All bulkhead to be painted with WFS2A - Taupe. Paint colour TBC at Stage 4. Refer to 428XX series drawings for high level painting & decorating finishes	Where no ceiling indicated: concrete slab to be exposed and existing coffer ceilings to be retained Exposed slab to be cleaned and made good. All existing services to be removed.

