




- notes typically:**
- all existing windows to be carefully removed
 - all existing lightweight internal partitions / doors and suspended ceilings to be removed
 - all existing loose fittings and fixtures, sanitaryware etc to be removed from internal spaces
 - all existing pipework / services internally to be removed, all connecting services to be safely terminated in advance
 - all existing lightweight staircases to be removed.
 - all walls to lift/hoist shafts interfering with proposed accommodation arrangement to be demolished
 - carry out brickwork repairs locally where necessary, areas of repointing not deemed to be lime mortar type to be raked and reinstated as such
 - cleaning method to existing brickwork / masonry (cills / lintels etc internally to be agreed with LA

key:

--- to be removed/demolished

- brickwork removed to create new apertures
- profiled sheet metal / asbestos cladding to be removed
- lift shaft to be removed

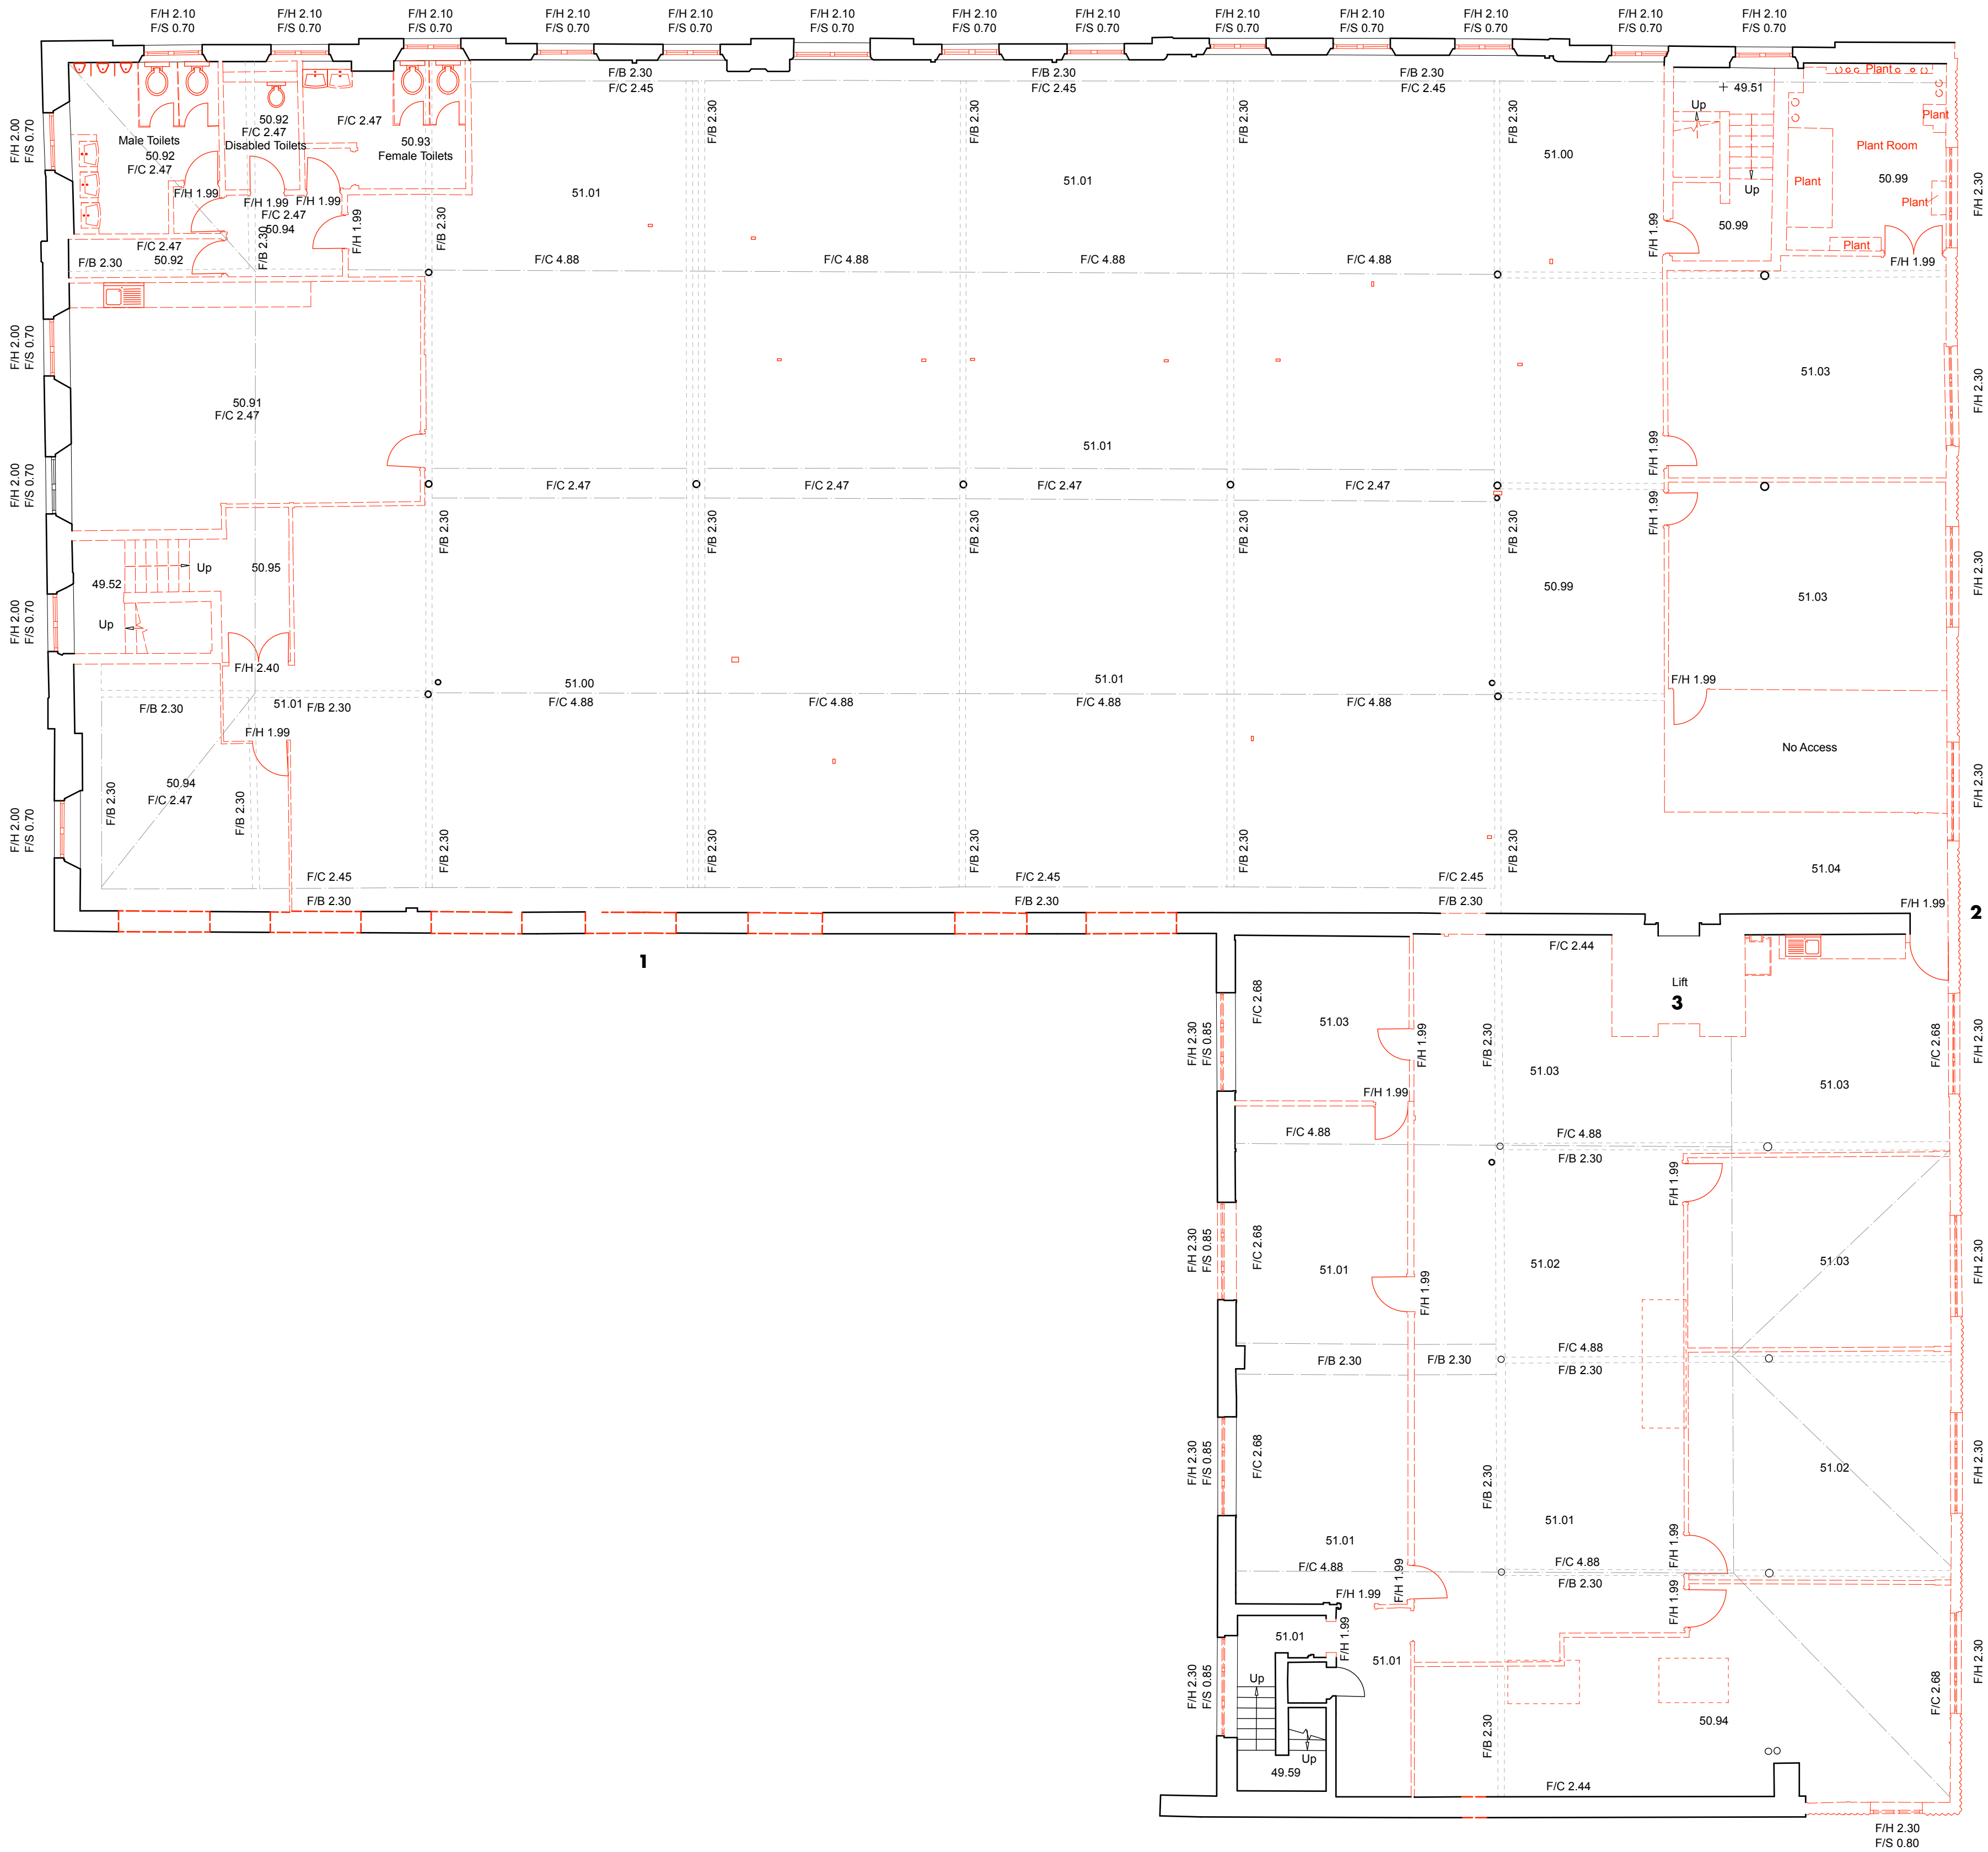

e • planning issue	20.01.17 • ch • him
d • cage ladder on demolitions	14.12.16 • ch • him
c • status/notes updated + draft planning issue	10.11.16 • him • ms
b • work stage 2	28.07.16 • him • ms
a • draft work stage 2	14.07.16 • ajd • him
- • first issue	27.05.16 • him • ms
rev • description	issued • drawn • checked

shedkm	+44 (0)151 709 8211 +44 (0)207 253 8881
project	kampus • listed buildings
client	ASDL
drawing number	AW(00)128e
scale	100 @ a1
status	work stage 3

minshull • third floor demolitions

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately