

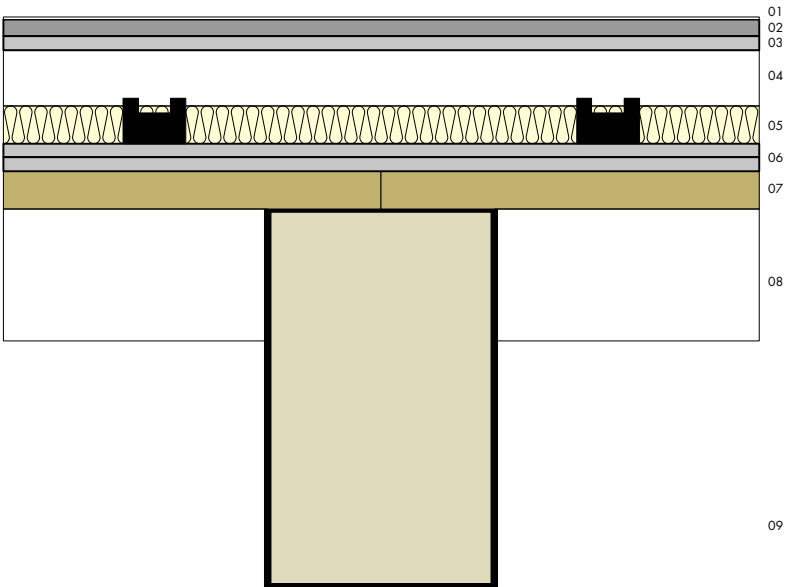
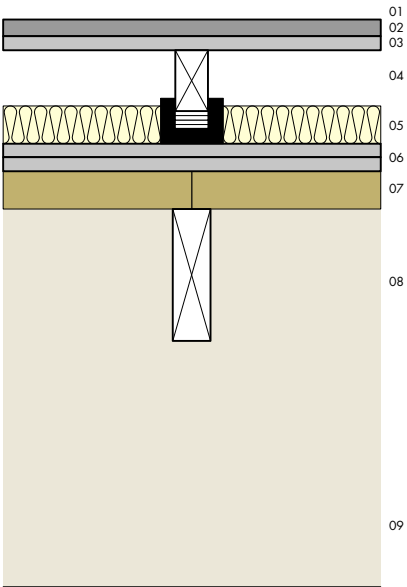


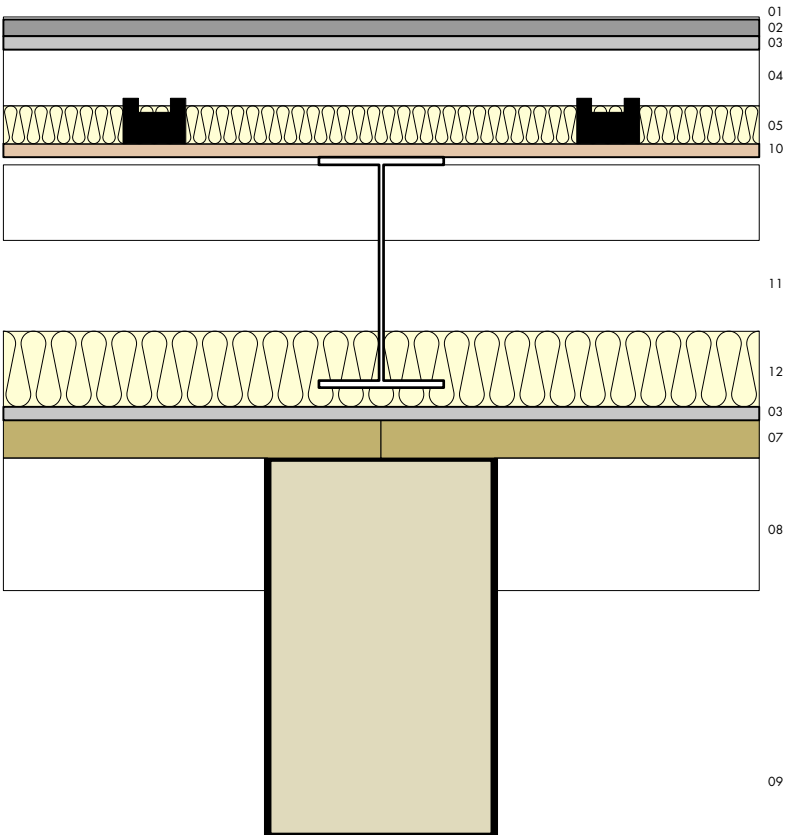

502/01 minto + turner • typical floor build-up residential + commercial to commercial

- 01 floor finish as required
- 02 22mm T&G cement particle board flooring (plus sealant if used as floor finish)
- 03 18mm fermacell
- 04 acoustic cradle and batten floor packed at each node to achieve level floor finish.
- 05 50mm insulation
- 06 2 x 18mm fermacell
- 07 existing floor boards (see footnote for finishes)
- 08 new timber floor joists (175 x 50mm @ 450mm centres - see footnote for finishes)
- 09 existing primary timber beam (see footnote for finishes)
- 10 18mm ply
- 11 independent structure (305 UB / C24 joists)
- 12 100mm insulation

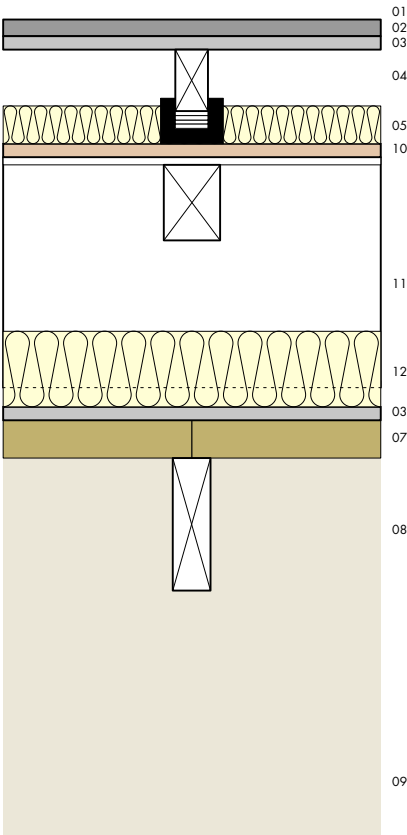

502/02 minto + turner • typical floor build-up commercial to residential

o • planning issue
• first issue
rev • description

20.01.17 • hlm • ch
14.12.16 • hlm • ch
issued • drawn • checked

project	kampus • listed buildings
client	ASDL
drawing number	AW[23]502a
scale	1:10 @ a3
status	work stage 3

typical floor build ups • minto + turner

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately