GIH Flood Light Specifications



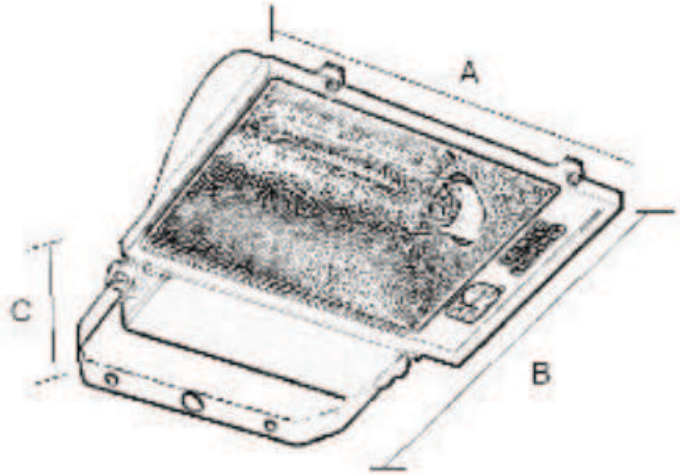

Features
- General purpose floodlight, ideal for large area lighting
- Removable gear tray
- IP65
- Maximum projected area = 0.17m2

Construction
- Die cast aluminium body, black polyester powder coated
- Hinged toughened glass
- Supplied with lamp and gear

Cat No	Lamp	A	B	C	Weight (kg)	
GIH400HPI	1 x 400W HPI/T	510	410	155	9.80	
GIH400S	1 x 400W SON/T	510	410	155	11.10	

Note: Die cast aluminium bodied floodlight for use with high wattage discharge lamps as per 'GIH' range

Floodlights are located on an "L" shaped brackets (see image).
The brackets are secured to the structure by scaffold doubles
>>>>



INFINITY
OUTDOOR LIMITED