FULL FILL CAVITY WALL

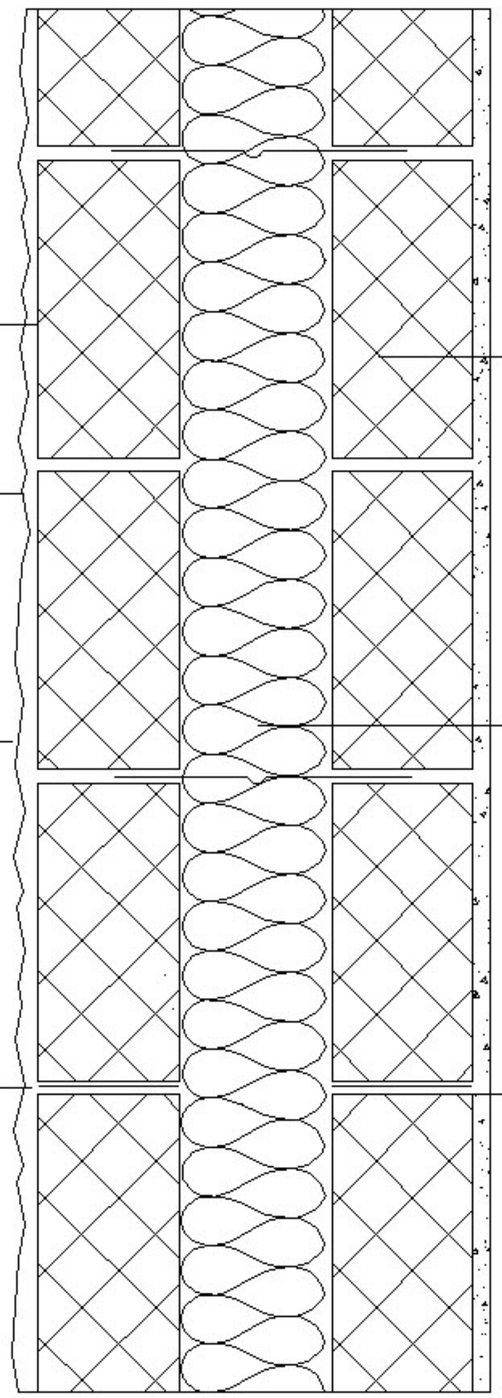

Walls to be built with 1:1:6 cement mortar

20mm two coat sand/cement render with waterproof additive

Stainless steel retaining wall ties built in at 750mm ctrs horizontally, 450mm vertically and 225mm ctrs at reveals and corners in staggered rows

Horizontal strip polymer (hyload) damp proof course to both leafs minimum 150mm above external ground level

100mm block K value 1.13, e.g Lafarge Stancrete

110mm Rockwool Cavity insulation as manufactures details

Internal finish to be 12.5mm plasterboard on dabs