




proposed elevation 1 • little david street

datum 35.00m

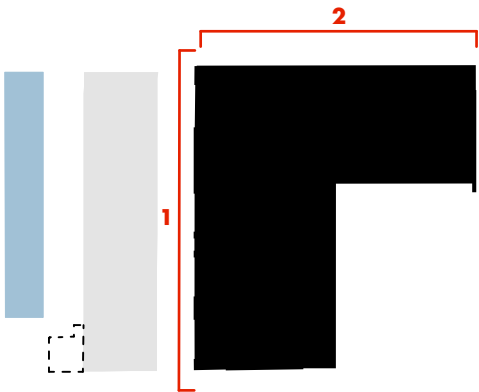

proposed elevation 2

datum 35.00m

- 1 existing brickwork to be cleaned (method tbc)
- 2 new PPC aluminium windows
- 3 existing stone cills to be cleaned (method tbc)
- 4 slate roof re-laid with reclaimed tiles
- 5 new rooflights on central pivot
- 6 existing stone copings to be repaired/replaced where necessary
- 7 new timber doors for access/egress to commercial units with signage + lighting above
- 8 new PPC opening vents as part of window system behind timber slats
- 9 fixing point for festoon lighting
- 10 fixing point for hanging luminaires
- 11 new canopies over external spaces for G4/G5 commercial units to shield view/noise to apartments above
- 12 black stained timber rainscreen cladding
- 13 new glazed doors for access to commercial units
- 14 new cast iron rainwater downpipes
- 15 new terracota airbricks for MVHR intake/extract
- 16 new circular vents for MVHR intake/extract
- 17 new vent tiles for MVHR intake/extract from third floor
- 18 new windows with louvers at ground floor
- 19 existing apertures dropped to create commercial entrances
- 20 existing timber shoot retained
- 21 brickwork infill to match existing

note

all windows are drawn with common fenestration. this may change pending further investigation

e • planning issue	20.01.17 • ch • him
d • draft planning issue	14.12.16 • ch • him
c • draft planning issue	10.11.16 • him • ms
b • work stage 2	28.07.16 • ejd • him
a • draft work stage 2	14.07.16 • him • ms
- • first issue	04.07.16 • sv • ms
rev • description	issued • drawn • checked

shedkm

+44 (0)151 709 8211
+44 (0)207 253 8881

project	kampus • listed buildings
client	ASDL
drawing number	AW(00)235e
scale	1:100 @ a1
status	work stage 3

minshull proposed long elevations

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately