


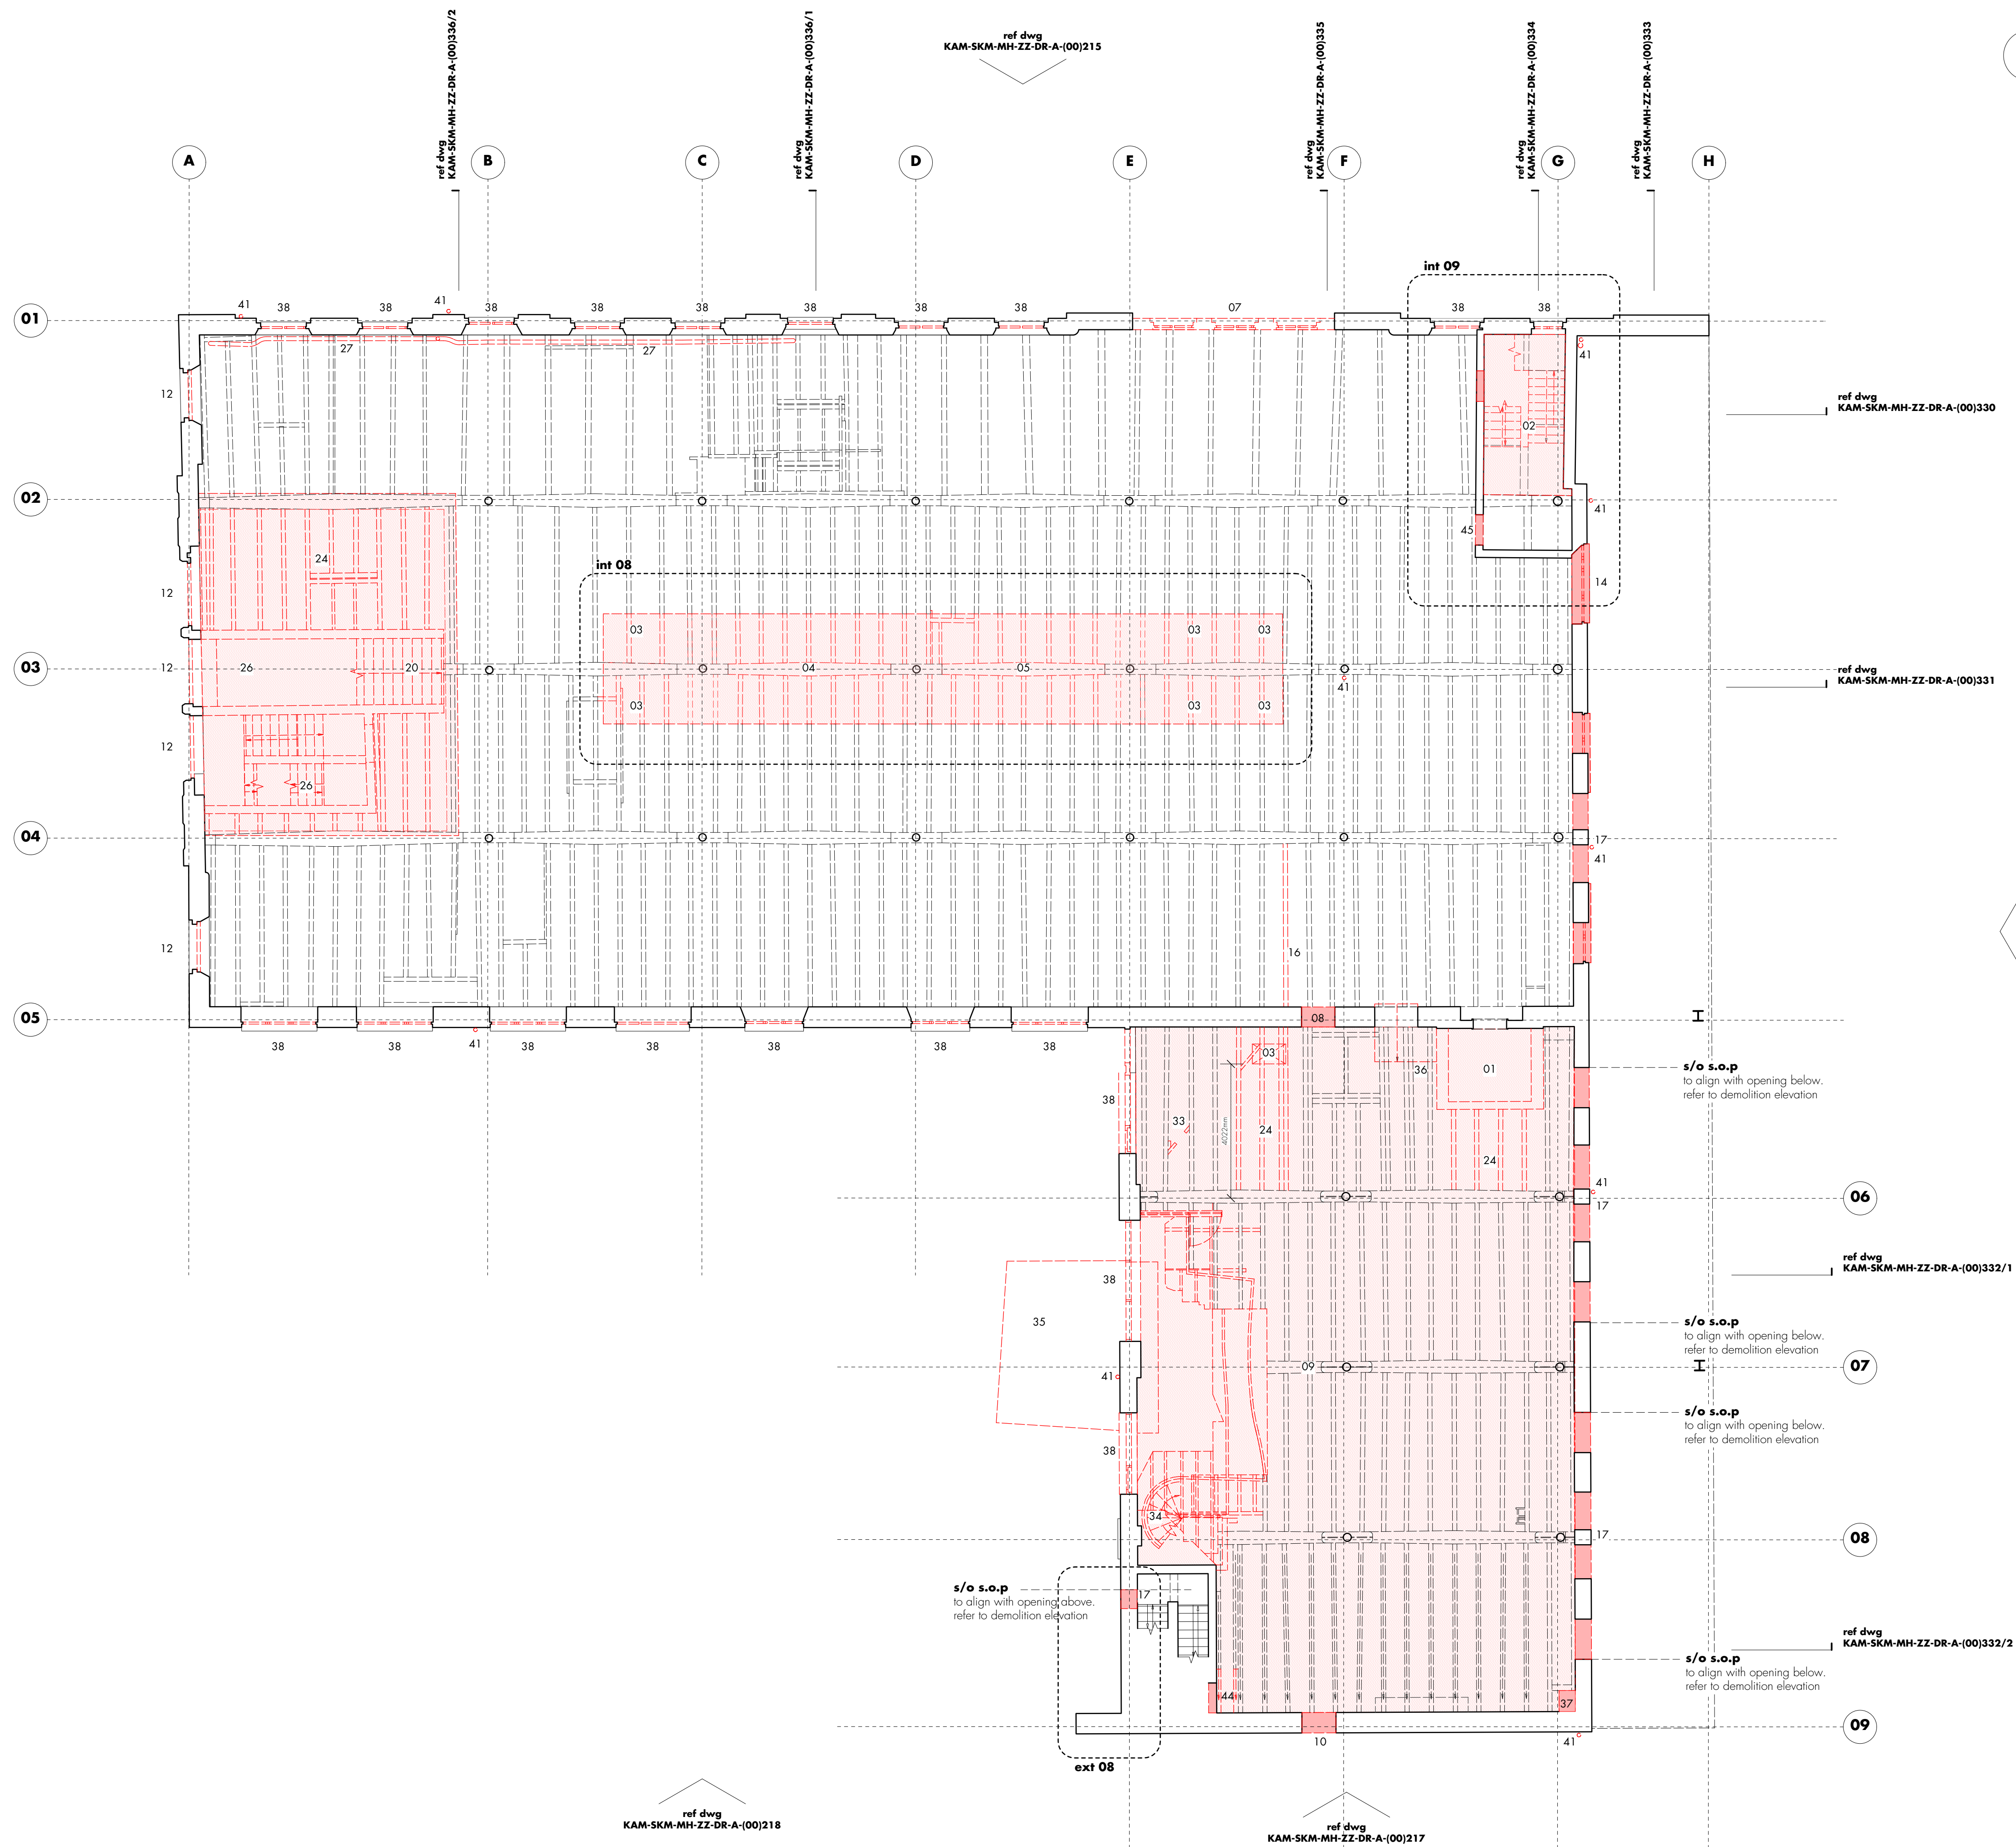

- 01 existing lift shaft removed
- 02 stair + half landings removed - brick enclosure retained
- 03 new void for service riser
- 04 new void for lift shaft + service riser, iron beam removed.
- 05 lift pit excavated to manufacturers guidelines
- 06 new void for stair core, iron beam + joists removed
- 07 existing openings taken to ground to create new entrances
- 08 brick infill removed, opening rationalised with new windows and infill to match surrounding - G4 commercial entrance
- 09 new opening for corridor
- 10 composite concrete slab removed to ground floor wall line.
- 11 existing brickwork removed to create new window opening
- 12 new window opening with stone plinth cut locally.
- 13 glass block wall removed, concrete frame retained
- 14 existing door to be carefully removed, restored and reinstated, ref heritage report
- 15 existing window removed and cills to be lowered
- 16 existing corrugated metal deck floor build up and foam insulation to be removed
- 17 opening to accommodate light well
- 18 new opening for door/window, existing brickwork removed
- 19 existing door opening widened
- 20 corrugated facade cladding removed
- 21 floor boards removed back to ground floor brick piers
- 22 existing roof lights and supporting timbers removed
- 23 new rooflight opening
- 24 new opening for aov
- 25 joist to be removed
- 26 roof purlin to be removed
- 27 stair + half landings and brick enclosure removed
- 28 pipes/services to be removed
- 29 roof tiles to be carefully removed
- 30 existing gutters, flashing and waterproofing to be removed
- 31 parapet stone coping to be removed, refurbished and reinstate where possible
- 32 opening to allow plant deck support steel
- 33 ventilation tile for mvr outlet
- 34 wall/partition/door/fixture to be removed
- 35 steel staircase to be removed
- 36 existing entrance porch to be removed
- 37 concrete plinth/steps to be removed
- 38 chimney to be removed
- 39 window to be removed
- 40 electric cupboard to be removed
- 41 existing lift overrun to be removed
- 42 rainwater goods to be removed, original items to be assessed for potential reuse
- 43 partial removal of existing purlin to provide zone for column penetration
- 44 new opening for service duct
- 45 new opening for escape stair
- localised removal of 2no joists
- existing opening adapted
- lintel to be lifted to suit addition of raised floor

notes

all existing windows to be carefully removed, subject to MCC approval

any remaining lightweight internal partitions / doors and suspended ceilings to be removed

all existing pipework / services internally to be removed, all connecting services to be safely terminated in advance

all areas of vegetation to be removed and treated to eradicate

areas of failed mortar/repainting to be raked out, repointed with mortar mix to align with WML specification and LA agreement

cleaning method to existing brickwork / masonry (cills / lintels etc internally to be agreed with LA

all roof slates to be removed, replacement strategy proposed subject to agreement with MCC.

notes

- survey based on murphy surveys - global consulting engineers

- survey info issued on 21.06.18

grid set as follows ...

- horizontal grid along gridline 03 established at third floor between centres of columns at gridline junction 03/B and 03/G

- horizontal grid along gridlines 02, 04, 06, 07 + 08 established at third floor parallel to gridline 03 at centre of column on gridline G

- vertical grid established at third floor at centres of columns along gridline 03

for plan drawings ref:

KAM-SKM-MH-ZZ-DR-A-(00)121-125

for elevation drawings ref:

KAM-SKM-MH-ZZ-DR-A-(00)215-217

for section drawings ref:

KAM-SKM-MH-ZZ-DR-A-(00)330-336

for core GA detailed demolition ref:

KAM-SKM-MH-ZZ-DR-A-(00)172-174

for elevation demolition ref:

KAM-SKM-MH-ZZ-DR-A-(00)215-220

for section demolition ref:

KAM-SKM-MH-ZZ-DR-A-(00)330-336

for external remedial schedule ref:

KAM-SKM-MH-ZZ-SC-A-150

key:

--- to be removed/demolished

to be removed/demolished

joist removal refers to floor above associated plan

floor removal refers to floor of associated plan

* s/o setting out subject to alignment with existing brick coursing.

change from original application, refer to changes schedule for further details

a • section 19/73 application issue

23.04.21 • hlm • jr

rev • description

issued • drawn • checked

shedkm

+44 (0)151 709 8211

+44 (0)207 253 8881

project kampus • listed buildings

client mount anvil

drawing number KAM-SKM-MH-01-DR-A-(00)122 a

scale 1:100 @ a1

status **planning**

minshull house • first floor demolition plan

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately