




- 1 existing stonework to be cleaned (method tbc)
- 2 existing brickwork to be cleaned (method tbc)
- 3 existing timber door repaired and re-instated
- 4 slate roof re-laid with reclaimed tiles
- 5 existing stone copings to be repaired/replaced where necessary
- 6 new rooflights on central pivot
- 7 new PPC aluminium windows
- 8 existing stone cills to be cleaned (method tbc)
- 9 existing screens repaired and re-instated
- 10 existing steps repaired
- 11 existing fire escape to be retained and repaired (inaccessible)
- 12 new timber door - opening dimension to be confirmed following additional survey work
- 13 existing sign to be lightly cleaned and retained

note

all windows are drawn with common fenestration, this may change pending further investigation

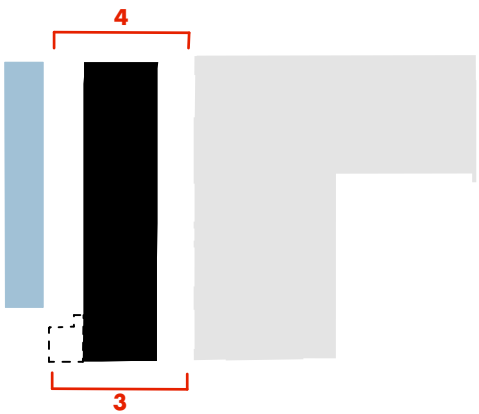

proposed elevation 3 • charlton street



proposed elevation 4

e • planning issue	20.01.17 • ch • him
d • orientation of window opening updated	14.12.16 • him • ms
c • draft planning issue	10.11.16 • him • ms
b • work stage 2	28.07.16 • ejd • him
a • draft work stage 2	14.07.16 • him • ms
- • first issue	04.07.16 • him • ms
rev • description	issued • drawn • checked

shedkm

+44 (0)151 709 8211
+44 (0)207 253 8881

project	kampus • listed buildings
client	ASDL
drawing number	AW(00)232e
scale	1:100 @ a1
status	work stage 3

minto proposed short elevations

do not scale from this drawing • all dimensions are to be set out and checked on site prior to starting construction • any discrepancy found between information given on this drawing and that given elsewhere or recorded on site shall be brought to the attention of the project architect immediately