


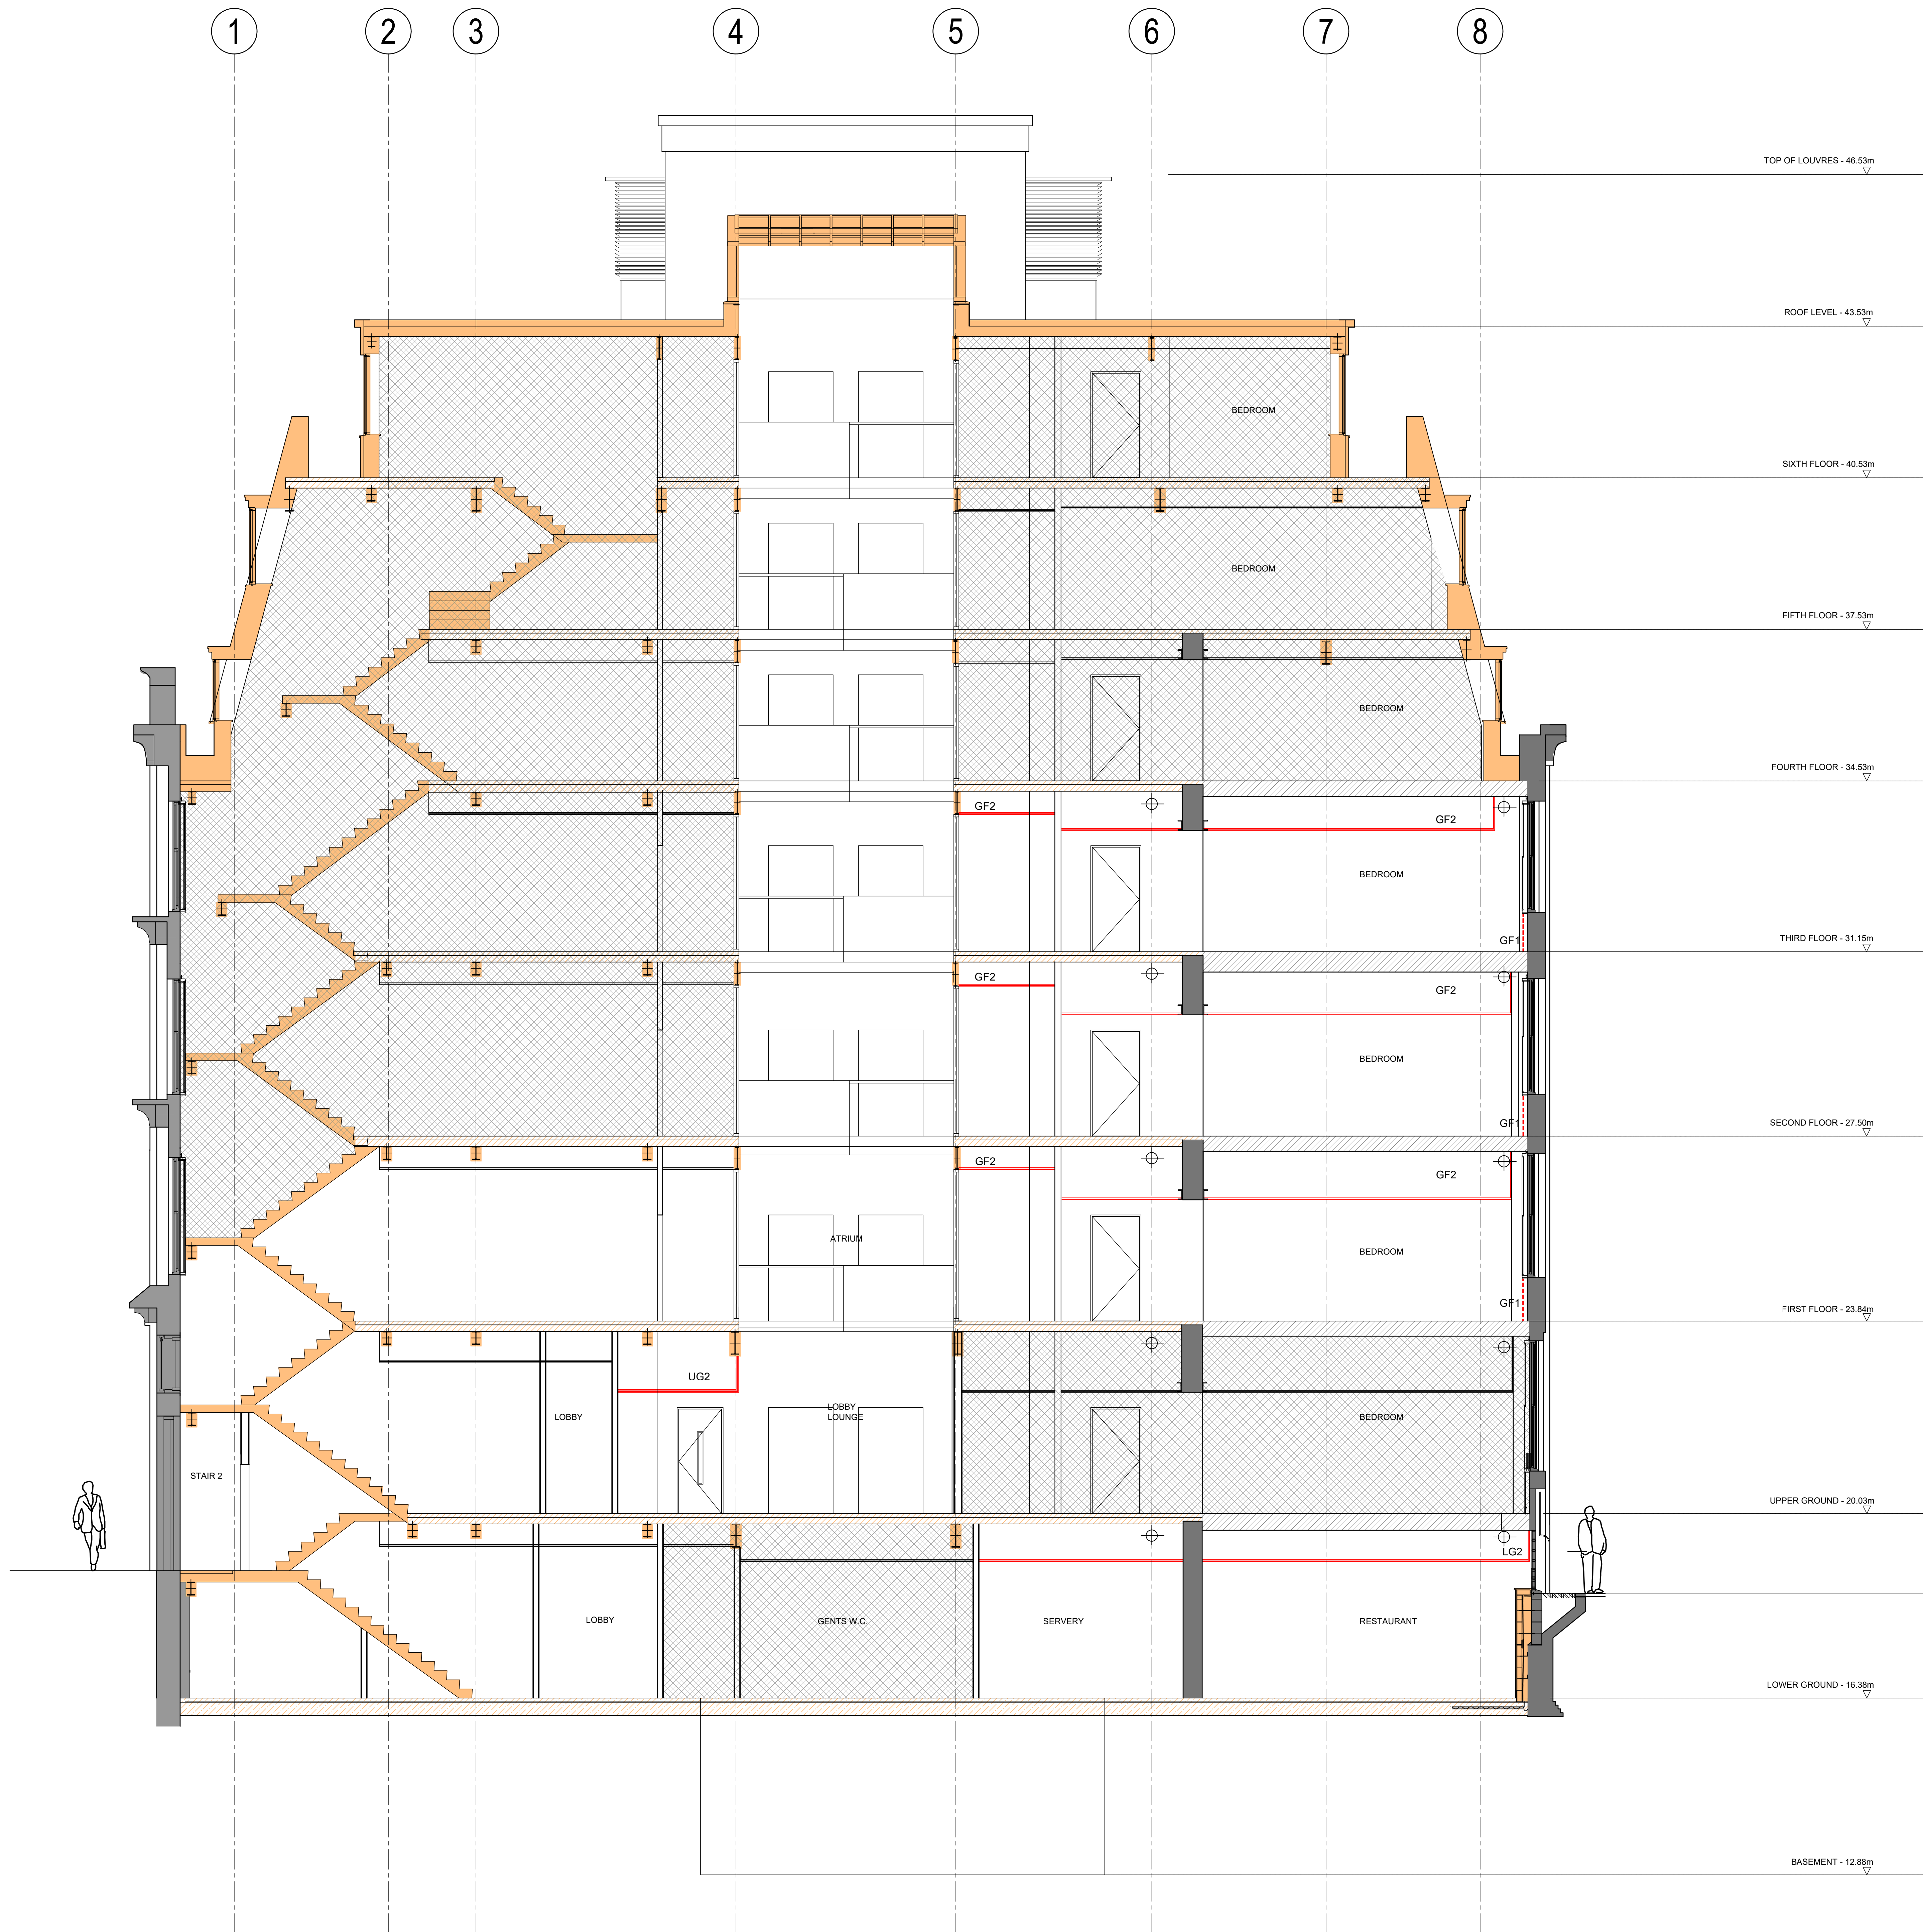

DEMOLITION NOTES:	GENERAL NOTES:
LG2 REMOVAL OF NON-ORIGINAL PLASTERBOARD BULKHEADS & DECORATIVE CEILING THROUGHOUT FRONT OF HOUSE AREAS. EXISTING NON-ORIGINAL BULKHEADS & CEILINGS INSTALLED AS PART OF THE 2002 WORKS. FIRE BOARDED SOFFIT TO LEFT IN PLACE & MADE GOOD WHERE NECESSARY. REFER TO L(35) CODE CEILING PLANS FOR TREATMENT TO BEAMS ABOVE.	ALL DIMENSIONS ARE TO BE CHECKED ON SITE WITH ANY DISCREPANCIES REPORTED TO THE ARCHITECT PRIOR TO THE WORKS BEING CARRIED OUT. ALL WORKS ARE TO BE IN ACCORDANCE WITH THE PLANNING APPROVAL AND ANY SUBSEQUENT APPROVED LOCAL AUTHORITY PLANNING CORRESPONDENCE INCLUDING DRAWINGS, DOCUMENTS AND REPORTS.
UG2 REMOVAL OF NON-ORIGINAL PLASTERBOARD BULKHEADS & DECORATIVE CEILING THROUGHOUT FRONT OF HOUSE AREAS. EXISTING NON-ORIGINAL BULKHEADS & CEILINGS INSTALLED AS PART OF THE 2002 WORKS. FIRE BOARDED SOFFIT TO LEFT IN PLACE & MADE GOOD WHERE NECESSARY. REFER TO L(35) CODE CEILING PLANS	ALL WORKS ARE TO COMPLY WITH THE BUILDING REGULATIONS, BRITISH STANDARDS, CODE OF PRACTICE, AND ANY LOCAL STATUTORY REQUIREMENTS. ALL WORKS ARE TO COMPLY WITH CURRENT HEALTH AND SAFETY LEGISLATION, H.S.E. RECOMMENDATIONS/GUIDANCE AND THE CURRENT C.D.M. REGULATIONS.
UG8 REMOVAL OF NON-ORIGINAL WALL LININGS TO REVEAL ORIGINAL MASONRY. EXISTING NON-ORIGINAL LININGS INSTALLED AS PART OF 2002 WORKS. EXPLORATORY WORKS INDICATE NO PRESENCE OF INSULATION OR VAPOUR BARRIER.	THIS DRAWING IS TO BE READ IN CONJUNCTION WITH LEACH RHODES WALKER ARCHITECTS GENERAL ARRANGEMENT (L CODE) DRAWINGS, TOGETHER WITH RELEVANT DETAILED (A CODE) DRAWINGS AND SPECIFICATIONS.
GF1 REMOVAL OF NON-ORIGINAL WALL LININGS TO REVEAL ORIGINAL MASONRY. EXISTING NON-ORIGINAL LININGS INSTALLED AS PART OF 2002 WORKS. EXPLORATORY WORKS INDICATE NO PRESENCE OF INSULATION OR VAPOUR BARRIER.	FOR ALL STRUCTURAL WORKS REFER TO THE STRUCTURAL ENGINEERS INFORMATION.
GF2 REMOVAL OF NON-ORIGINAL PLASTERBOARD BULKHEADS & DECORATIVE CEILINGS TO GUESTROOMS & CORRIDORS. EXISTING NON-ORIGINAL BULKHEADS & CEILINGS INSTALLED AS PART OF THE 2002 WORKS. FIRE BOARDED SOFFIT TO LEFT IN PLACE & MADE GOOD WHERE NECESSARY.	FOR ALL MECHANICAL AND ELECTRICAL WORKS REFER TO THE MECHANICAL AND ELECTRICAL ENGINEERS INFORMATION. FOR ALL ABOVE GROUND DRAINAGE WORKS REFER TO THE PUBLIC HEALTH ENGINEERS INFORMATION. ALL PRODUCTS SPECIFIED ARE TO BE INSTALLED STRICTLY IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS, SPECIFICATION AND DETAILS.
EXISTING KEY:	DEMOLITION KEY:
EXISTING ORIGINAL WALL / STRUCTURE, CONCEALED BY INTERNAL LININGS. EXISTING NON-ORIGINAL WALL / STRUCTURE. EXISTING ORIGINAL JOISTED FLOOR STRUCTURE WITH NON-ORIGINAL PLYWOOD DECK & FLOATING ACOUSTIC FLOOR. EXISTING NON-ORIGINAL CONCRETE SLAB ON METAL DECK WITH SCREED TOPPING. EXISTING NON-ORIGINAL CONCRETE SLAB.	DASHED RED LINES INDICATES EXISTING TO BE REMOVED. HATCH INDICATES EXISTING ORIGINAL STRUCTURAL FLOOR TO BE REMOVED (IN LINE WITH S.E. DETAILS). HATCH INDICATES EXISTING NON-ORIGINAL RAISED FLOOR TO BE REMOVED (IN CONJUNCTION WITH A(43) DETAILS). HATCH INDICATES EXISTING FLOOR FINISHES TO BE SAW CUT & REMOVED LOCALLY. EXISTING ORIGINAL WALL / STRUCTURE, CONCEALED BY INTERNAL LININGS. EXISTING NON-ORIGINAL WALL / STRUCTURE. EXISTING NON-ORIGINAL WALL LININGS TO BE REMOVED, ORIGINAL MASONRY BEHIND INSPECTED, BRUSHED TO REMOVE LOOSE DEBRIS & SEALED IN FINISH TO SUIT ID SPECIFICATION IF EXISTING CONDITION IS ACCEPTABLE. EXISTING NON-ORIGINAL COLUMN ENCASEMENT TO BE REMOVED & NON-ORIGINAL COLUMN INUMESCENT PAINTED TO ACHIEVE 90mins FR. EXISTING NON-ORIGINAL WALL LININGS / BOXING TO BE RETAINED. INTERFACES WITH LININGS TO BE REMOVED TO BE INFILLED & MADE GOOD AS NECESSARY TO ENSURE FIRE & ACOUSTIC COMPARTMENTS ARE MAINTAINED. HATCH INDICATES AREAS TO REMAIN AS EXISTING (NO PROPOSED WORK).
NOTES THE EXTENT OF EXISTING SERVICES TO BE REMOVED TO BE ADVISED BY M&E CONSULTANT. REFER TO M&E DRAWINGS & SPECIFICATIONS. ANY DEMOLITION WORKS THAT MAY AFFECT EXISTING STRUCTURAL INTEGRITY OF THE BUILDING TO BE REVIEWED & ADVISED BY THE STRUCTURAL ENGINEER, PRIOR TO COSTING & ANY WORKS ON SITE. DECORATIVE CEILINGS TO BE REMOVED & SERVICES EXPOSED SUBJECT TO THE ABOVE & BELOW. THE EXISTING FIRE COMPARTMENTATION IS TO REMAIN INTACT. ACOUSTIC INTEGRITY TO BE REVIEWED BY SPECIALIST.	
A FURTHER DETAILED NOTES ADDED IN SJM SJM 23.04.21 RESPONSE TO PLANNERS LETTER DATED 14/04/21. rev description drawn date DO NOT SCALE OFF THIS DRAWING LEACH RHODES WALKER 391	

LeachRhodesWalker
Architects

Info@lrw.co.uk | www.lrw.co.uk
50 Deansgate Place | Manchester | M3 5LH
Manchester London Bucharest
+44 (0)161 833 0211 +44 (0)207 993 1363 +40 (21)850 4026

client ASPEN HOTELS LTD		
project STOREYS MANCHESTER		
project no. 8180	drawing no. L(26)106	rev A
description DEMOLITION SECTION B:B		
scale 1:50@ A0	date issued 12.03.21	drawn by SJM
checked by SJM	approved by SJM	authorised by SJM
proposed by SJM		
checked by SJM		
approved by SJM		
authorised by SJM		